

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 7, Township 136N, Range 31W, 5th p.m., State of Minnesota, County of Cass


At the corner location shown on the sketch:

On _____ found a _____
Date

left monument as found lowered monument removed monument (explain)

On 04/30/2012 placed a 3/8" RE-ROD WITH RLS CAP NO. 17774
Date

SKETCH OF REFERENCE TIES

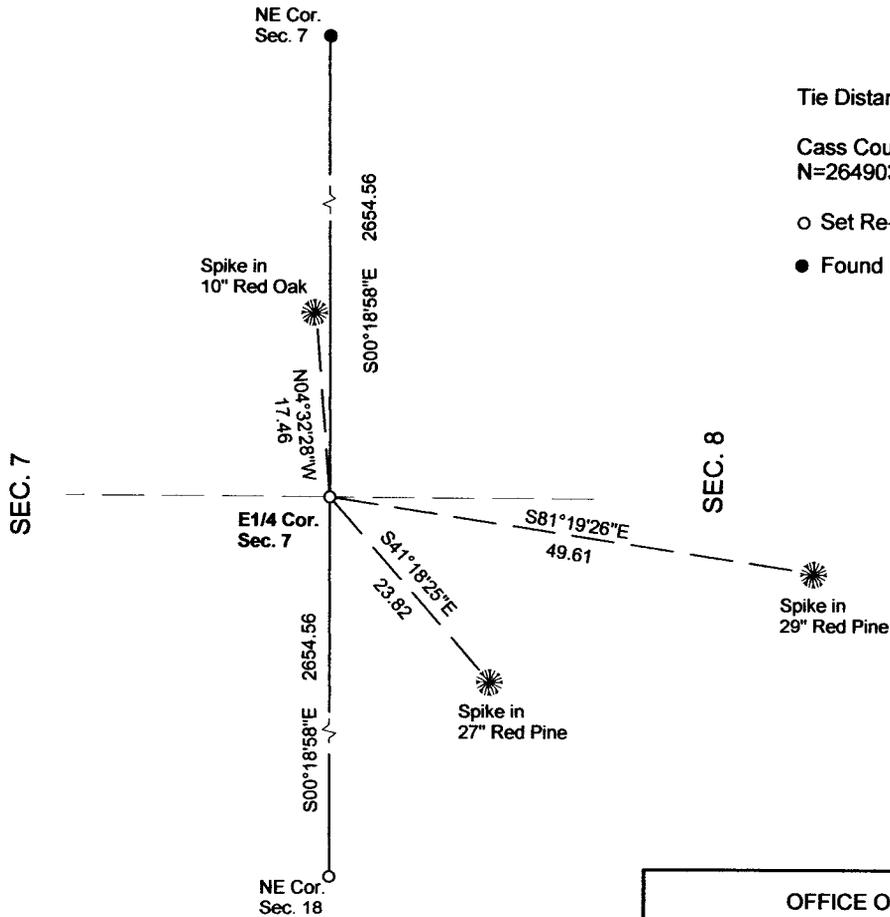


Tie Distances are measured to the spikes

Cass County Coordinate System (South Zone)
N=264903.4316 E=460119.4998

○ Set Re-Rod with RLS cap No. 17774

● Found Pipe



SEC. 7

SEC. 8

NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R. Kohout 20 Oct 2012
Marvin R. Kohout Date

Registration No, 17774

Land surveyor

OFFICE OF COUNTY RECORDER



A000598675

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

12/5/2013 9:30:42 AM

AS DOC #: A000598675

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR Dep





EAST QUARTER CORNER OF SECTION 7, TOWNSHIP 136 N., RANGE 31 W., 5TH P.M.

1870 DEPUTY SURVEYOR RICHARD CRONK, IN THE ORIGINAL
GOVERNMENT SURVEY, SET A POST AND MARKED BEARING
TREES.

2012 APRIL DOUG STILLE AND MARVIN KOHOUT, LS NO. 17774, OF KOHOUT
LAND SURVEYING, SEARCHED FOR EVIDENCE OF THIS
CORNER. A MONUMENT WAS SET AT A PRORATED
DISTANCE AND ON LINE BETWEEN THE NORTHEAST
CORNER OF SECTION 18 AND THE NORTHEAST CORNER
OF SECTION 7.