



A000599905

OFFICE OF THE COUNTY RECORDER
 CASS COUNTY, MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON

1/27/2014 10:38:16 AM

AS DOC #: A000599905

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
 CASS COUNTY RECORDER

BY SR _____ Dep

Index No. Z-5

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard Southeast Corner of Section 31
 Township 145 N, Range 26 W, 5th P.M.
 STATE OF MINNESOTA, COUNTY OF CASS


On 05/19/2010, found a(n): 2" Galvanized Iron Pipe with 3" Brass Cap stamped RLS# 6807, 2.5' Above Ground

- left monument as found lowered monument
 removed monument (explain) raised monument

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

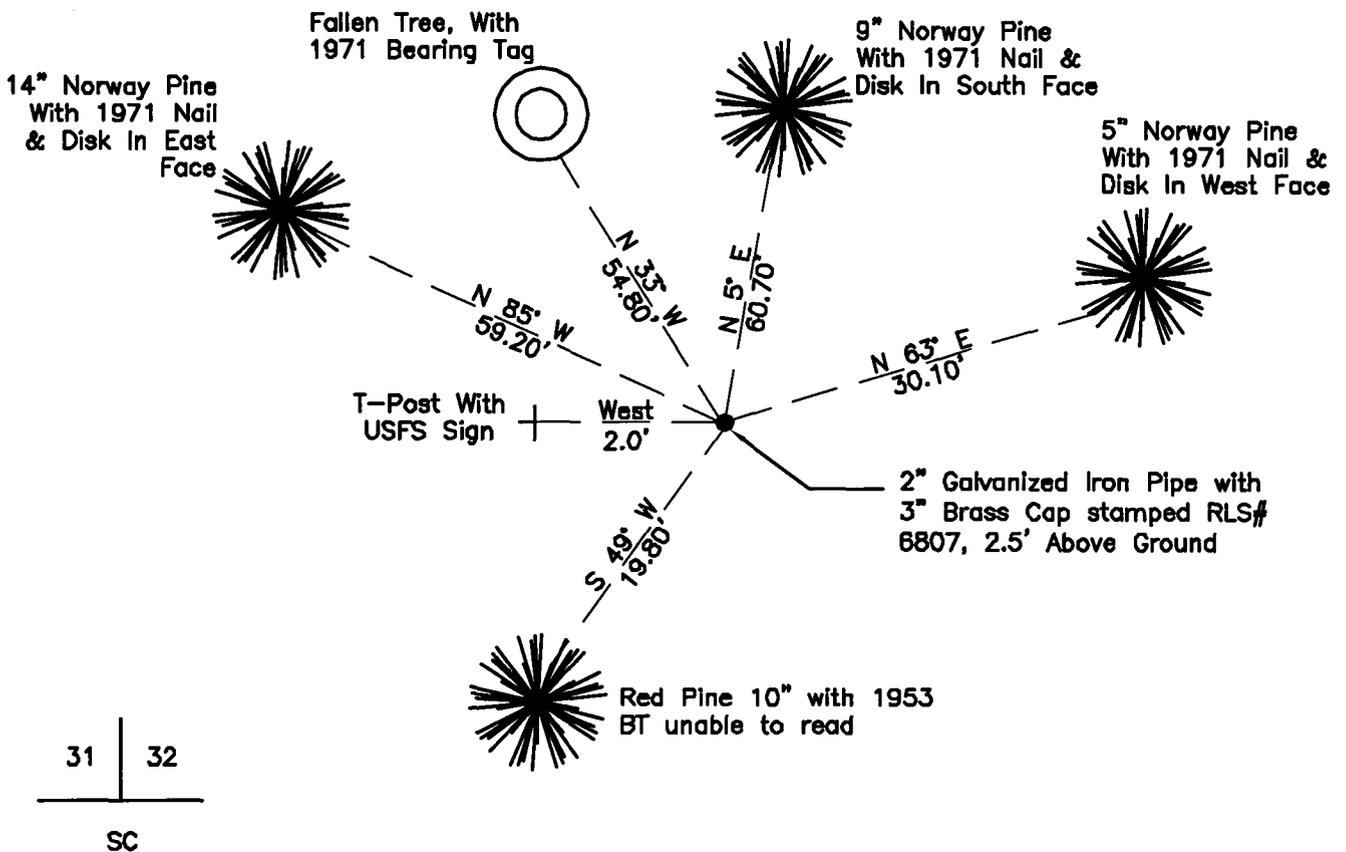

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17197496.750

Easting: 1390016.125

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
 signature

6/6/13
 date

Ross Wamre, Minnesota License No. 45334



STATEMENT OF EVIDENCE: Standard Corner common to Section 31 and 32 of Township 145 North,
Range 26 West of the 5th Principal Meridian

1873; G.R. Stuntz, for the Government Land Office established this corner and set a wooden post and witnessed by:

Black Pine 14" North 77° East, 126 Links
Black Pine 9" North 69° West, 145 Links

1953; R.W. Fassett, USFS, Book 2 of Township 144 North, Range 26 West, page 22, resurvey established this corner and set a 4" treated wooden post scribed "SC". This post was set 5 chains West of Closing Corner as called for in the original notes and witnessed by:

Birch 7" North 47° East, 48 Links
Red Pine 6" South 15° East, 39 Links
Red Pine 5" South 49° West, 30 Links

1971; Curt Krause & Milo E. Stefan, RLS# 12261 for USFS, Book 2 of Township 144 North, Range 26 West, page 22, found the post set in 1953 and all 3 bearing trees and replaced with a 2 inch x 60 inch galvanized iron pipe with brass cap stamped RLS# 6807 William Okerman and witnessed by:

Norway Pine 14" North 85° West, 59.2' Feet, Scribed SC S31 BT
Norway Pine 12" North 33° West, 54.8' Feet, Scribed SC S31 BT
Norway Pine 9" North 05° East, 60.7' Feet, Scribed SC S32 BT
Norway Pine 5" North 63° East, 30.1' Feet, Scribed SC S32 BT
Steel Post 72" long West 25' Feet
Treated Post 4" North, 1.8' Feet

Milo Stefan prepared a Certificate of Location and Recorded as Doc# A000426205

2010; Kadrmas, Lee & Jackson found a 2" galvanized iron pipe with a 3" brass cap stamped RLS# 6807, projecting 2.5' above ground and witnessed. Witnesses found and established as shown on the face of this certificate.

2012; Ross Wamre, PLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Engineers Office
Cass County Surveyors Office
Northern Engineering and Consulting Inc.
United States Forest Service
MnDOT – District Office 2
Bureau of Indians Affairs – Bemidji
Bureau of Land Management's (BLM) Northeastern States Field Office