

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 6
Township 138 N, Range 31 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF Cass



A000599910

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/27/2014 10:38:21 AM

AS DOC #: A000599910

PAGES: 2
REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Page 1 of 2
A000599910


On 10/22/2012, found a(n): 2" Iron Pipe Down 0.6' and 2'± East of C of North-South Road.

- left monument as found
- removed monument (explain)
- lowered monument
- raised monument

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

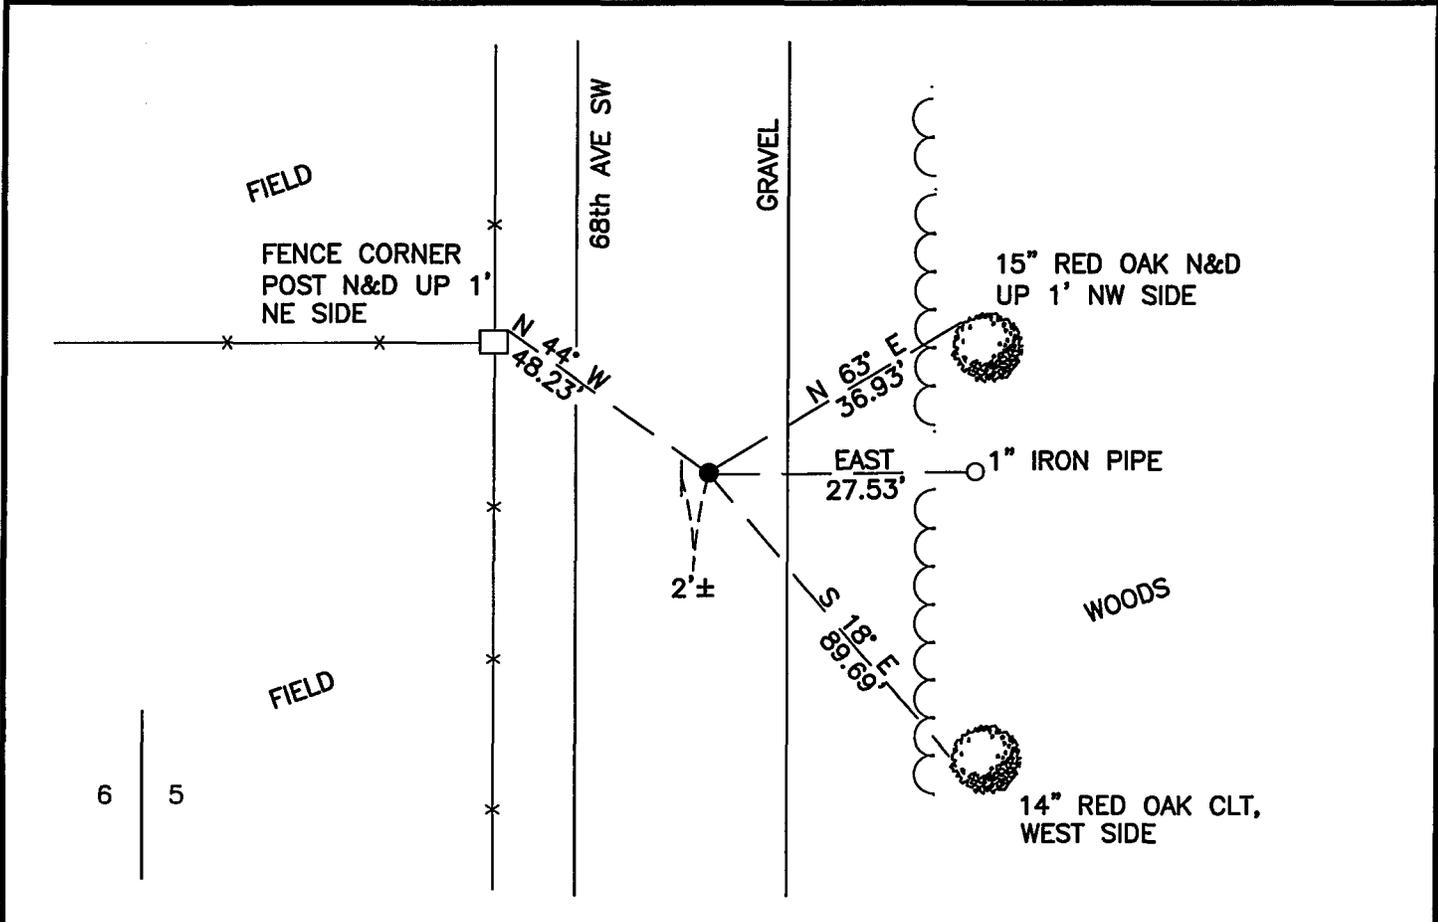

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 333627.427
Easting: 456758.368

NAD 83/2007 Adjustment.
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly licensed Land Surveyor under the laws of the State of Minnesota.

signature

1-14-14
date

Jarrett M. Leas, Minnesota License No. 42619



Statement of Evidence

East Quarter corner of Section 6, Township 138 North, Range 31 West, 5th Principal Meridian.

- Nov. 1870 T.B.Walker, General Land Office (GLO) Deputy Surveyor set a post for the original corner and referenced it as follows:
6" R.Oak N 42°30' W 8 links (5.3 feet) 14" N.Pine N 17°15' E 20 links (13.2 feet)
Said records are on file at the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).
- March 1916 E.B.Horst, LS 376, Deputy County Surveyor, Survey Record Number 357, Book B, page 561, on file in the CCSO, illustrates a sketch of section 6, and states,"take crew and set corners around outside of sec as per diagram".
- Apr. 1916 J.W. Curo, Cass County Surveyor, LS 1428, County Surveyor, County Resurvey, on file at the Cass County Recorders Office, in cabinet E, sheet 48 indicates a 2 1/4"X4' Iron Monument.
- Apr. 1916 E.B. Horst, LS 376, Deputy County Surveyor, Curo field book 53, page 61, depicts a sketch of section 6, indicating 2621.60' to the Northeast corner of Section 6, and 2734.40' to the Southeast corner of Section 6.
- June 1916 J.W.Curo, Cass County Surveyor, LS 1428, County Resurvey, on file in the Cass County Recorders Office, (CCRO) in cabinet E, Sheet 48 and notes in Curo Field Book 53, page 55, on file in the CCSO, indicates an Iron Monument.
- Oct. 2003 B.Hippen and T.Anderson, technicians, CCSO, notes on file in the CCSO, found a 2" ODIP, flush, 1 foot more or less, East of centerline of 68th Avenue and 38 feet more or less South of a fence to the West. They makes ties to 4 references
- Jan. 2007 Bruce Skipton, LS 17768, on a certificate of survey of the NW SW Section 5, indicates a found monument.
- Oct. 2012 A KLJ survey crew found a 2" Iron Pipe, and is witnessed with the ties shown on the front of this certificate. Jarrett Leas, RLS #42619, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.