

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 17
Township 138 N, Range 31 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF Cass



A000599917

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/27/2014 10:38:28 AM

AS DOC #: A000599917

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Page 1 of 2 A000599917


On _____, found a(n): _____
DATE

- left monument as found
- removed monument (explain)
- lowered monument
- raised monument

On 10/24/2012, set a(n): 5/8" X 24" Rebar With Plastic Cap
DATE
Stamped "Leas MN 42619" up 0.4'.

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

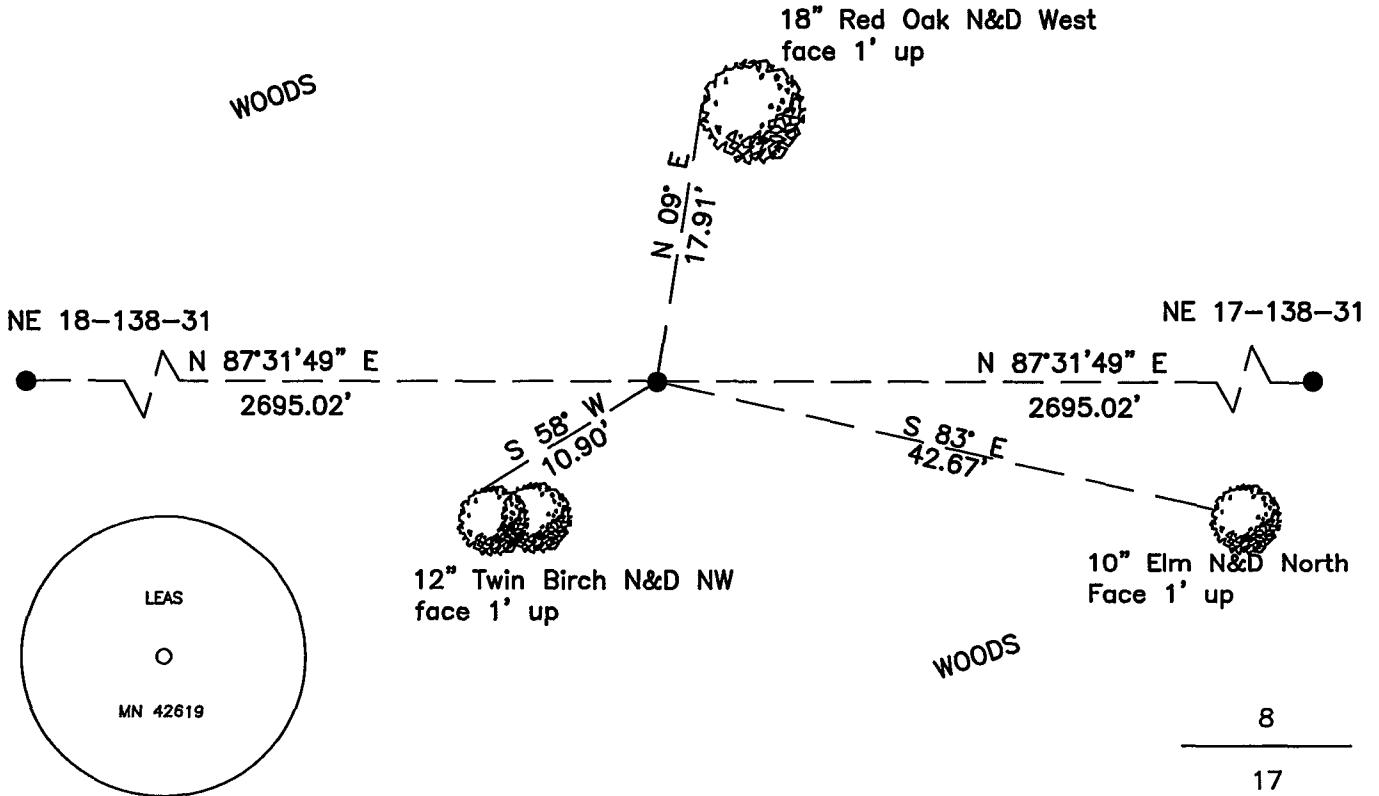

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 325717.281

Easting: 459344.833

NAD 83/2007 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Jarrett M. Leas
signature
Jarrett M. Leas, Minnesota License No. 42619

1-14-14
date



Statement of Evidence

North Quarter corner of Section 17, Township 138 North, Range 31 West, 5th Principal Meridian.

- Nov. 1870 T.B.Walker, General Land Office (GLO) Deputy Surveyor set a post for the original corner in his subdivision of this township and referenced it as follows:
8" Birch N 54° W 18 links (11.88 feet) 6" Birch S 38° E 12 links (7.92 feet)
Said records are on file at the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).
- Sept 1, 2005 B.Hippen, technician, records of the CCSO, made a search at this position, and found no evidence of corner in this area. Swamp location was made for comparison to land calls.
- Oct. 2012 KLJ field crews search and find no evidence of the corner. KLJ computes a lost corner position from proportioning between the SW and SE corners of section 8, splitting the overall distance of 5390.04' on a bearing of N87°31'49"E and sets a new monument stamped "Leas MN 42619". Monument is witnessed with the ties shown n on the front of this certificate.