

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 9
Township 145 N , Range 29 W , 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000599920

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

1/27/2014 10:38:31 AM

AS DOC #: A000599920

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR Dep



On 10/20/2010, found a(n): 2" Iron Pipe With 3" Brass Cap
Stamped RLS# 3628

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

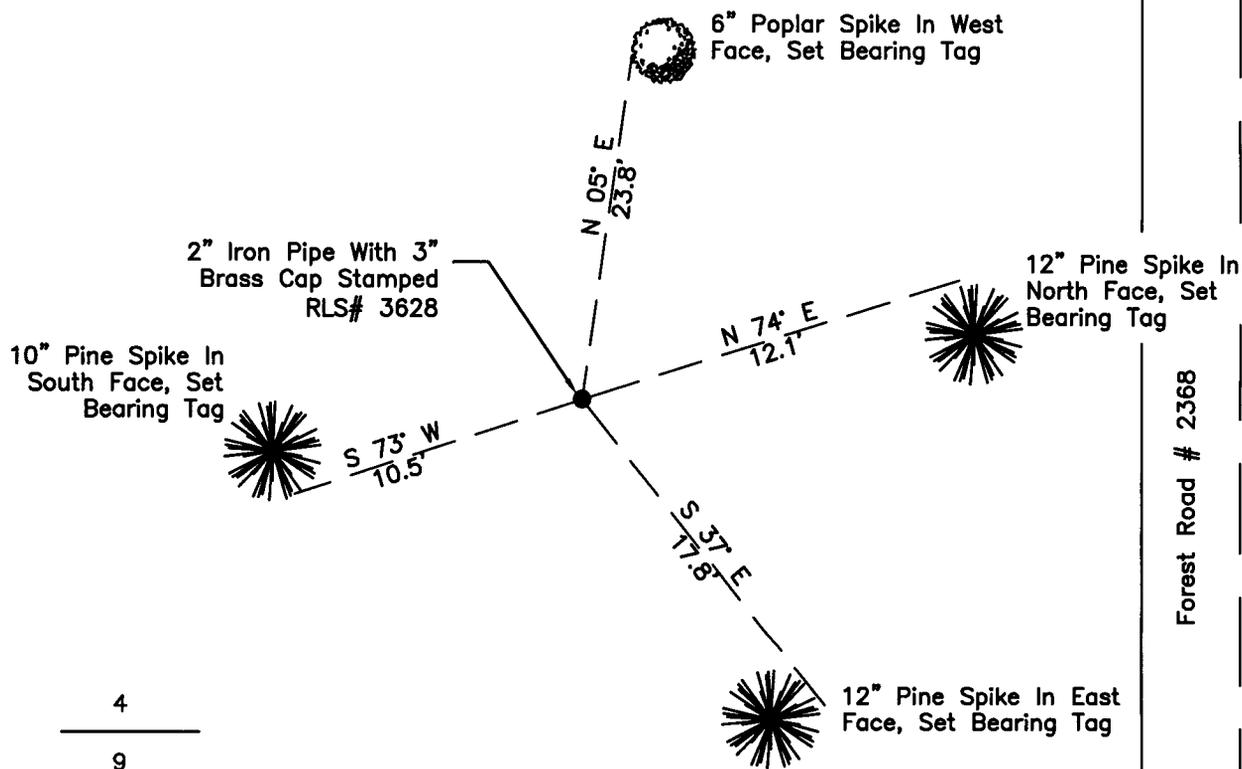

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17225385.326

Easting: 1303153.241

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

10/13/13
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 2 A000599920



STATEMENT OF EVIDENCE: Quarter Corner common to Sections 4 and 9 of Township 145 North,
Range 29 West of the 5th Principal Meridian

1874; This corner was originally established by P.H. Conger his field notes indicate a wood post set at this corner position, witnessed by:

Yellow Pine 10" South 60° East, 65 links
Black Pine 2 ½" North 72° East, 20 links

1958; USFS notes of Township 145 North, Range 29 West, Book 1, Page 7, on file at the USFS office in Cass Lake, MN show Pete Meyer, RLS #3628, found an original BT. No other original evidence was found. He proceeded to set a 2" dia. 5' long galvanized wrought iron pipe filled with concrete and capped with a 3" dia. stamped Brass Cap marked RLS No. 3628, 1958. An affidavit of Location of Government Corner is on file with the Cass County Surveyor's Office. Witnessed by:

Red Pine 26" South 60° East, 42.9' scribe visible (1874 Tie)
Aspen 6" South 85° West, 40.3'
Red Oak 5" North 10° West, 72.2'
Red Oak 7" North 50° East, 31.6'

2010; A Kadrmas, Lee & Jackson survey crew found a 2" iron pipe with a 3" Brass cap stamped RLS #3628 in a mature Norway pine plantation. Witnesses established as shown on the face of this certificate.

2012; Ross Wamre, PLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Engineers Office
Cass County Surveyors Office
Northern Engineering and Consulting Inc.
United States Forest Service
MnDOT – District Office 2
Bureau of Indians Affairs – Bemidji
Bureau of Land Management's (BLM) Northeastern States Field Office