

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 18  
Township 145 N, Range 29 W, 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



A000599921

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

1/27/2014 10:38:32 AM

AS DOC #: A000599921

PAGES: 3

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER  
BY SR Dep


On 05/20/2010, found a(n): 2" Iron Pipe with 3" Brass Cap  
Stamped RLS #3628, 1.3' Above Ground

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument


On \_\_\_\_\_, set a(n): \_\_\_\_\_

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

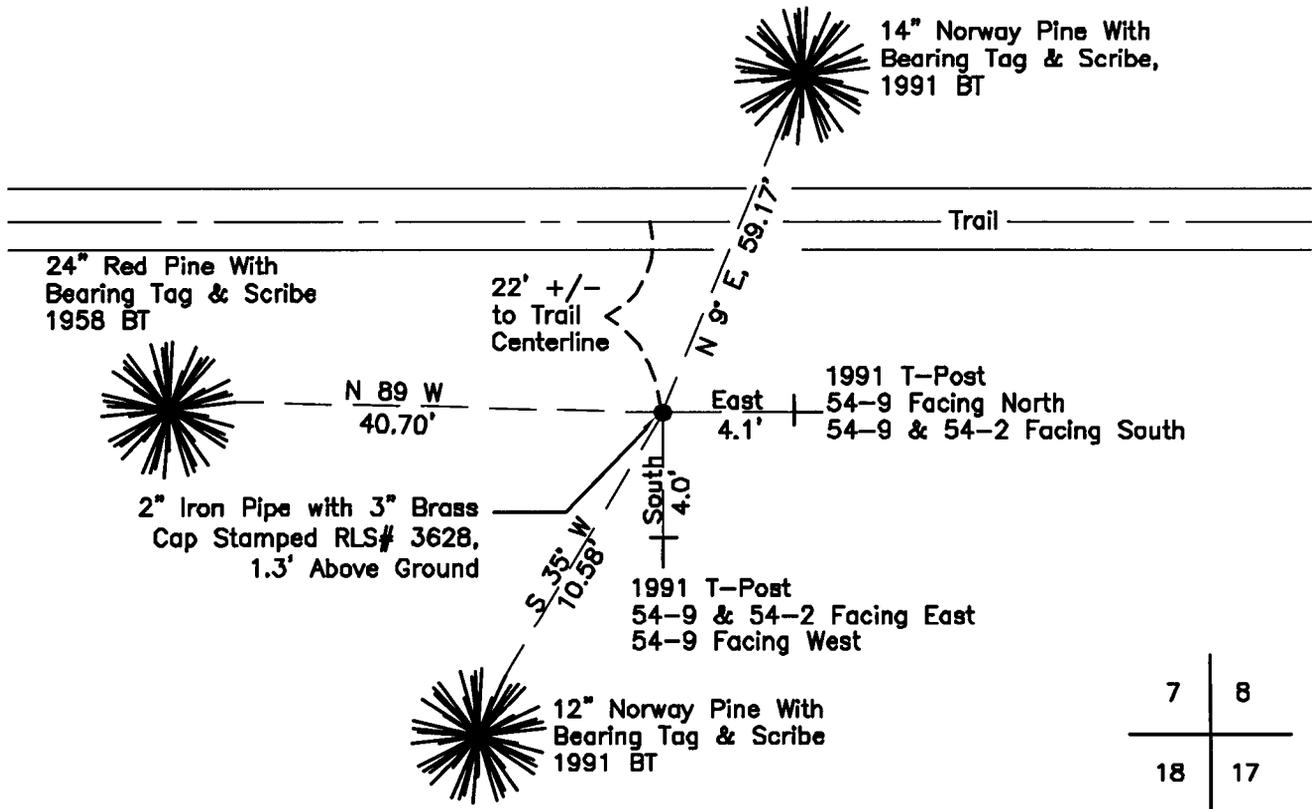

### "SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15

Northing: 17219957.632

Easting: 1294922.614

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*Ross Wamre*

signature

6/13/13

date

Ross Wamre, Minnesota License No. 45334

Page 1 of 3 A000599921



**STATEMENT OF EVIDENCE:** Corner common to Sections 7, 8, 17 and 18 of Township 145 North,  
Range 29 West of the 5<sup>th</sup> Principal Meridian

**1874;** This corner was originally established by P.H. Conger for the GLO. His field notes indicate this corner position, witnessed by:

White Pine 10" North 5° East, 16 links  
White Pine 12" South 21° East, 38 links

**1958;** USFS notes of Township 145 North, Range 29 West, Book 1, Page 5, on file at the USFS office in Cass Lake, MN show Pete Meyer, RLS #3628 found the original BT's as stumps with scribing visible he preceded to set a 2" diameter, 5' long galvanized wrought iron pipe filled with concrete and capped with a 3" diameter stamped bronze tablet marked RLS #3628 1958 witnessed by:

White Pine Stump 15" North 5° East, 10.6' scribe visible (1874 Tie)  
White Pine Stump 16" South 21° East, 25.1' scribe visible (1874 Tie)  
Red Pine 16" North 89½° West, 40.7'  
Jack Pine 12" North 18° West, 67.4'  
Jack Pine 6" North 13° East, 49.3'  
White Pine 7" South 89½ East, 65.9'

**1991;** USFS notes of Township 145 North, Range 29 West, Book 1, Page 5, on file at the USFS office in Cass Lake, MN show Curtis Krause, USFS, found a 2" Iron - in place – in good condition 20' south of FR #2959 witnessed by:

Norway Pine 22" North 89° West, 40.7' –scribe visible, set tag (1958 Tie)  
Large Jack Pine Stump North 18° West, 67.3' – (1958 Tie)  
Jack Pine 10" North 13° East, 49.3' – scribe visible, set tag (1958 Tie)  
Dead White Pine Snag 12" South 89° East, 65.9' –scribe closed (1958 Tie)  
Norway Pine 14" North 9° East, 59.17' MKD S8 BT  
White Oak 9" South 75° East, 33.45' MKD S17 BT  
Norway Pine 10" South 35° West, 10.58' MKD S18 BT  
8' Steel Post South 4.0' both signs attached  
8' Steel Post East 4.1' both signs attached

**2001;** Certificate of Survey of a Proposed Tower Site Document No. 1364 on file with the Cass County Surveyor's office show Robert Muscha, RLS #10078, found a concrete monument with bronze tablet at this corner location.

**2010;** A Kadrmas, Lee & Jackson survey crew found a 2" Iron Pipe with a 3" Brass cap monument stamped RLS# 3628, 1.3' above the ground, witnesses found and established as shown on face of this certificate.

**2012;** Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.



Contacts pertaining to this corner are as follows:

- Cass County Recorder's Office
- Cass County Engineers Office
- Cass County Surveyors Office
- Northern Engineering and Consulting Inc.
- United States Forest Service
- MnDOT – District Office 2
- Bureau of Indians Affairs – Bemidji
- Bureau of Land Management's (BLM) Northeastern States Field Office