

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 14
Township 145 N, Range 29 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000599922

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/27/2014 10:38:33 AM

AS DOC #: A000599922

PAGES: 3

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep


On 10/20/2010, found a(n): 2" Iron Pipe With 3" Brass Cap Bent Over, RLS# 3628

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument


On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

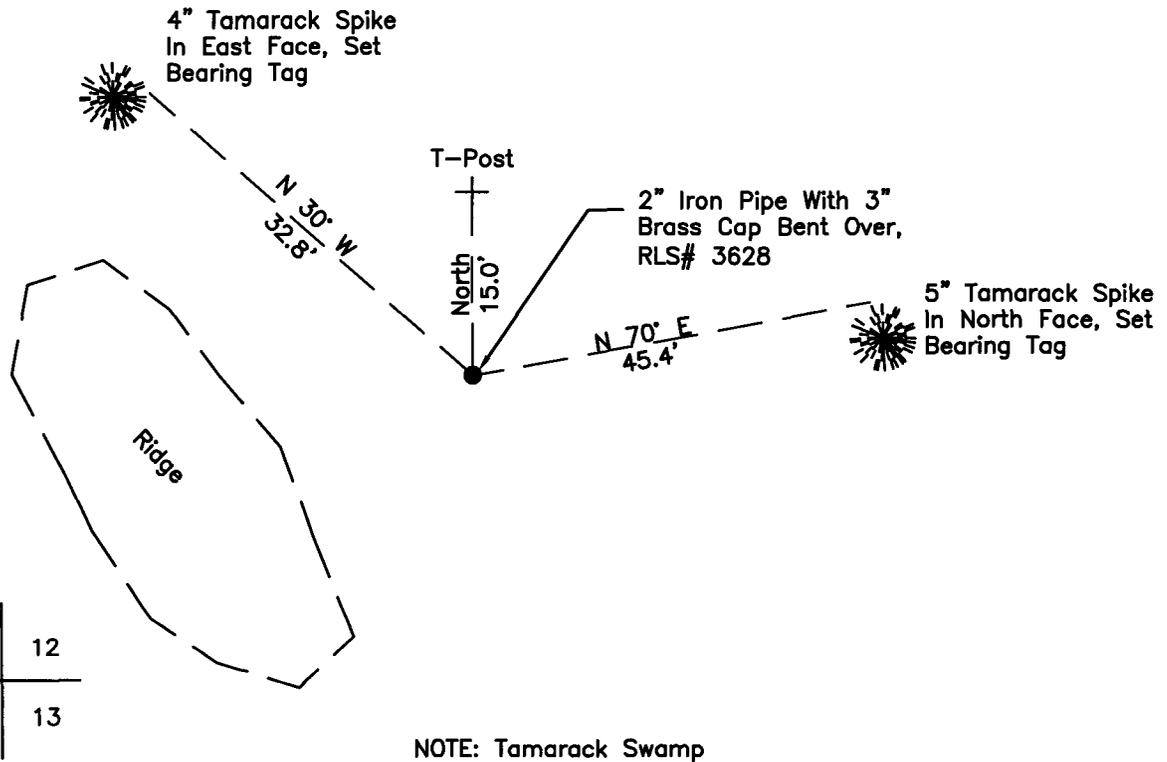

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17219720.125

Easting: 1315978.509

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

6/13/13
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 3
A000599922



STATEMENT OF EVIDENCE: Section Corner common to Sections 11, 12, 13 and 14 of Township 145 North, Range 29 West of the 5th Principal Meridian

1874; This corner was originally established by P.H. Conger for the GLO. His field notes indicate this corner position, witnessed by:

Black Pine 3" North 67^o East, 260 links
Black Pine 6" South 85^o East, 337 links
Black Pine 7" South 41^o West, 86 links

1903; U.S. Army Corps of Engineers recovered this corner according to Township 145 N Range 29 W flowage map for the Leech Lake and Lake Winnibigoshish Reservoirs. Map is on file at the USFS office in Cass Lake, MN.

1958; USFS notes of Township 145 North, Range 29 West, Book 1, Page 6, on file at the USFS office in Cass Lake, MN show Pete Meyer, RLS #3628, set a 2" diameter, 5' long galvanized wrought iron pipe filled with concrete and capped with a 3" diameter stamped bronze tablet RLS #3628 1958 witnessed by:

Black Pine Stub 18" South 41^o West, 56.8' scribe visible (1874 Tie)
Red Pine 20" South 51^o West, 183.5'
Tamarack 14" South 22^o East, 62.0'
Tamarack 6" South 56^o East, 103.0'

1974; Field notes of the BLM Dependent Resurvey of a portion of the East Boundary and Subdivisional Lines and the survey of the Subdivisions in Section 25, Township 145 North, Range 29 West, by Charles E. Akin Jr., Cadastral Surveyor, show he found an iron post, 2" inside dia., loosely set in a tamarack swamp 24" above ground witnessed by:

Black Pine Stub 18" South 41^o West, 86 Links scribe visible (1874 Tie)

1984; USFS notes of Township 145 North, Range 29 West, Book 1, Page 6, on file at the USFS office in Cass Lake, MN show M. Hayes, Brama and Allison, USFS, found monument up 24" and leaning to the east with base of monument in place. They straightened the monument. Witnessed by:

Found Stub South 41^o West, 56.8' scribe visible (1874 Tie)
Dead Tamarack 17" South 22^o East, 62.0' scribe overgrown (1958 Tie)
Dead Tamarack 7" South 56^o East, 103.0' scribe visible (1958 Tie)

1989; USFS notes of Township 145 North, Range 29 West, Book 1, Page 6, on file at the USFS office in Cass Lake, MN show M Hayes, USFS, perpetuated the corner location by adding a new tie:

Norway Pine 19" South 32^o East, 217.8' scribed and double blazed, set 50d spike

2004; USFS notes of Township 145 North, Range 29 West, Book 1, Page 6, on file at the USFS office in Cass Lake, MN show R. Main, USFS, found iron in place leaning witnessed by:

8' Tall Dead Tamarack Snag South 22^o East, 62.0' (1958 Tie)



Norway Pine 21" South 32° East, 217.8' (1989 Tie)

2010; A Kadrmas, Lee & Jackson survey crew found a 2" Iron Pipe with a 3" Brass cap monument bent over stamped RLS #3628, witnesses found and established as shown on face of this certificate.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

- Cass County Recorder's Office
- Cass County Engineers Office
- Cass County Surveyors Office
- Northern Engineering and Consulting Inc.
- United States Forest Service
- MnDOT – District Office 2
- Bureau of Indians Affairs – Bemidji
- Bureau of Land Management's (BLM) Northeastern States Field Office