

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 24, Township 139 N., Range 25 W., 5th P.M.
 State of Minnesota, County of Cass


At the corner location shown on the sketch:

On _____ found _____

left monument as found lowered monument removed monument (explain)

On Oct. 31, 2013 placed 1/2" O.D. iron pipe stamped 17768.

SKETCH OF REFERENCE TIES NOT TO SCALE

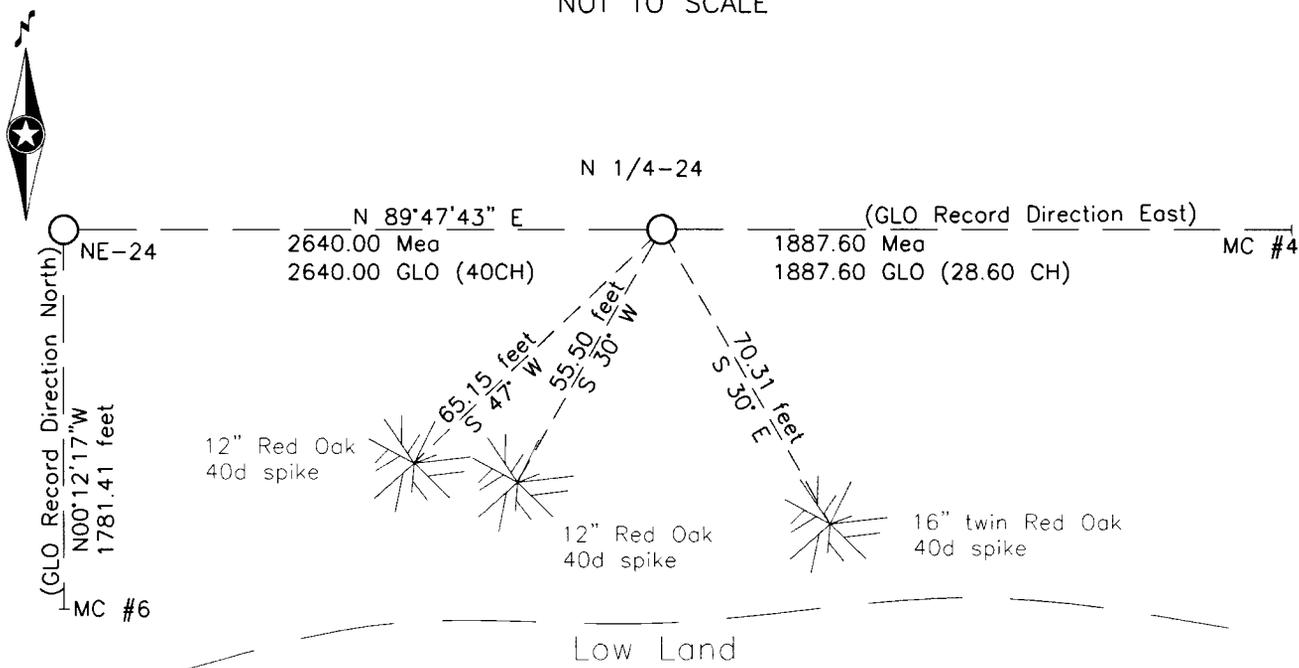

NOTE:
 All bearings are Cass Co. North, NAD 83, 96 ADJ

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

[Signature]
 Daniel W. Skinner, Land Surveyor
 Date 2-15-14 MN License No. 40827



A000600780
OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
3/6/2014 11:51:08 AM
AS DOC #: A000600780
PAGES: 2
REC FEES: 0.00
KATHRYN M. NORBY
CASS COUNTY RECORDER
 BY SR Dep



North Quarter corner, Section 24, Township 139 North, Range 25 West, 5th Principal Meridian. Index No. N-23

Statement of Evidence

Nov.16, 1863 - Johnson and Thornton, GLO Deputy Surveyors, set a post for the original corner and referenced it as follows: 5" Fir S 75 degrees E 11 links (7.26 feet); 7" W Birch N 33 degrees W 25 links (16.50 feet).

The above record is on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are on file in the Cass County Surveyor's Office (CCSO).

CCSO Files

1937 - Civilian Conservation Corps (CCC) personnel, Washburn Lake notes, Book 2, page 35, on file in the Minnesota Department of Natural Resources Office (MNDNR), set 3" red oak post at 2640 from west.

Karvako Engineering

Oct. 31, 2013 - Karvako Engineering Survey Crew found no evidence of the posts or bearing trees. The North Quarter corner was established by using the GLO record direction & distance from the west line of Section 24. A ½ inch outside diameter iron pipe stamped 17768 was set and the following witnesses were marked: 16" Twin Red Oak S 30 degrees E 70.31 feet; 12" Red Oak S 73 degrees W 55.50 feet; 12" Red Oak S 47 degrees W 65.15 feet.

Analysis of the recovered record data, field evidence and survey measurements, indicated that the monument set using Obliterated Methods is the accepted location of this corner.