

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast corner of Section 26, Township 139 N., Range 25 W., 5th P.M.
 State of Minnesota, County of Cass

At the corner location shown on the sketch:


On Oct.29,2013 found A 7/8 in OD iron pipe stamped 16459 set by Cass County Surveyors Office, 7/16/2004 badly bent

left monument as found lowered monument removed monument (explain)

On Oct.29,2013 placed Set a 1/2 in OD iron pipe stamped 17768 from all witness marks established by CCSO 7/16/2004

SKETCH OF REFERENCE TIES

NOT TO SCALE

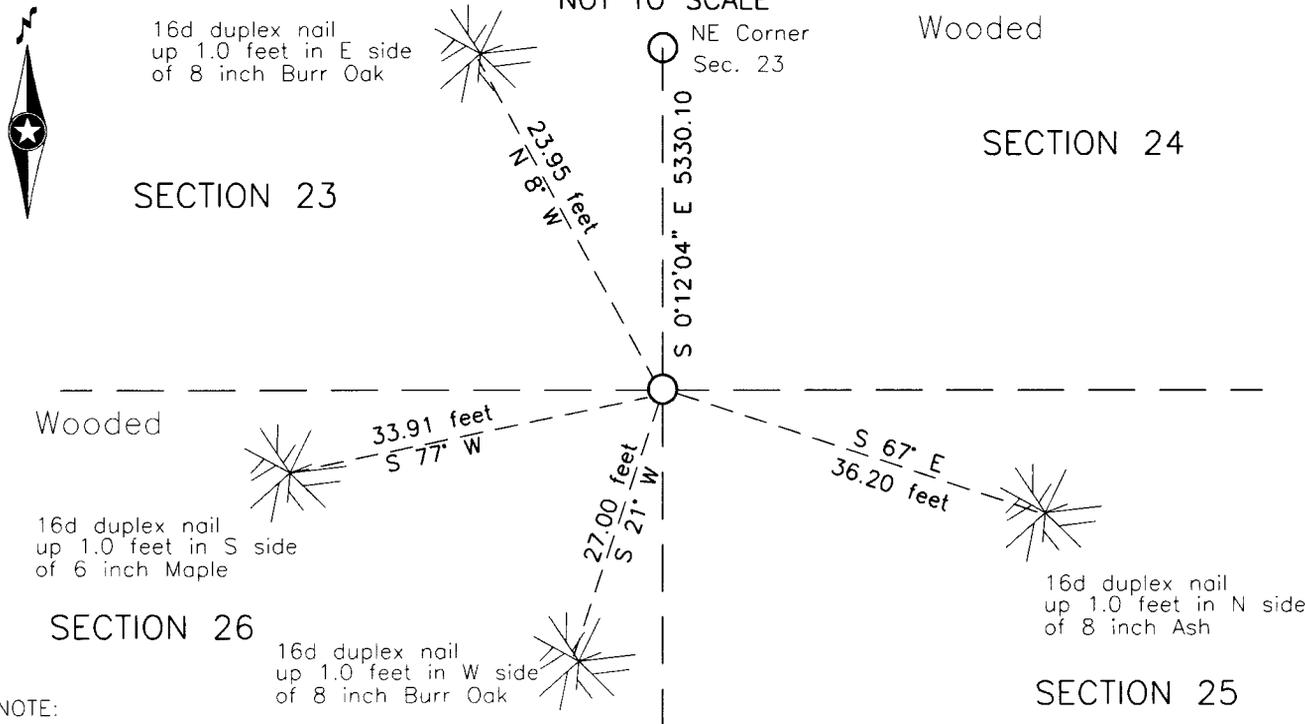

NOTE:
 All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

[Signature]
 Daniel W. Skinner, Land Surveyor
 Date 2-16-14 MN License No. 40827



A000600786
OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
3/6/2014 11:51:14 AM
AS DOC #: A000600786
PAGES: 2
REC FEES: 0.00
KATHRYN M. NORBY
CASS COUNTY RECORDER
 BY SR Dep



**Northeast corner Section 26, Township 139 North, Range 25 West, 5th Principal Meridian.
Index No. R-21**

Statement of Evidence

Nov.15, 1863 - Johnson and Thornton, GLO Deputy Surveyors, set a post for the original corner and referenced it as follows: 6" W. Pine N 22 degrees E 11 links (7.26 feet); 8" W. Pine N 62 degrees W 29 links (19.14 feet); 12" W. Pine S 55 degrees E 29 links (19.14 feet); 8" Spruce S 25 degrees W 33 links (21.78 feet).

The above record is on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are on file in the Cass County Surveyor's Office (CCSO).

CCSO Files

May 4, 1910 - A.W.Moulster, Deputy County Surveyor, Survey Record 161, Book A, page 346, and Curo Field Book 48, page 88, states "Found N.E and S.W. B.T's, old stumps – rotten but plainly marked. I set a post by flat measurement. New bearings as follows, 8 degrees 30 Var." 7" Elm S 4 degrees 12 min W 49.1 feet; 14" Ash N 75 degrees 19 min E 57 feet.

1937 - CCC personnel, Washburn Lake notes, Book 2, page 33, on file in the Department of Natural Resources Office (DNR), states set 4" Aspen post from which 12" Elm S 31-30 W 85' scribed w-B.T.

Jul. 16, 2004 - B.Hippen, CCSO technician, records of the CCSO, set a 7/8 inch outside diameter iron pipe, stamped 16459, up 0.3 foot, 70 feet, more or less, west of swale, at the 1910 bearing and distance from the NE corner of Section 23 through the recovered 1910 Meander corner position and marked the following witnesses: 8" B. Oak N 8 degrees W 23.95 feet; 8" Ash S 67 degrees E 36.20 feet; 8" B. Oak S 21 degrees W 27.00 feet; 6" Maple S 77 degrees W 33.91 feet.

Karvakko Engineering

Oct. 29, 2013 - Karvakko Engineering Survey Crew found a 7/8 inch outside diameter iron pipe stamped 16459 badly bent. All CCSO 7/16/2004 Witness were visible and in place. Set a 1/2 inch outside diameter iron pipe stamped 17768 from the witness marks established by CCSO 7/16/2004.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set by using Obliterated Methods by the CCSO in 2004 is the accepted location of this corner.