



A000600801

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/6/2014 11:51:29 AM

AS DOC #: A000600801

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Page 1 of 2 A000600801

Index No. QR-17

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

WC to MC#4 Corner of Section 22
Township 145 N, Range 29 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



On 4/17/2010, found a(n): USFS BT Set in 1995 S 40° W
18.5' to MC #4

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 7/25/2012, set a(n): 5/8" x 4' Rebar with a 3.5"
Aluminum Cap, 0.8' Above Ground between the EQ of Section 22 and
the computed MC position from the USFS BT

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

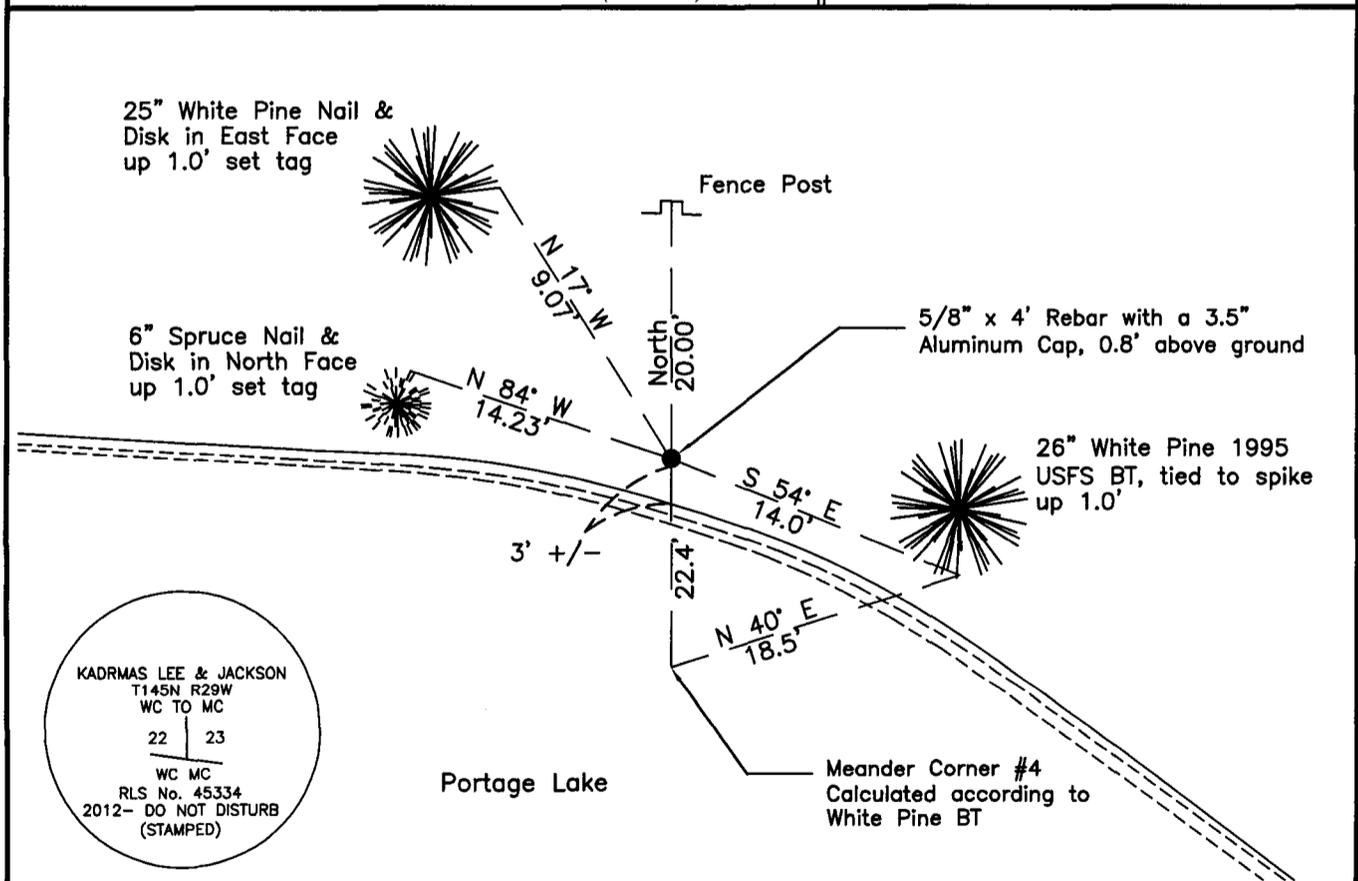

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17209640.971

Easting: 1310478.382

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

2/28/14
date

Ross Wamre, Minnesota License No. 45334



STATEMENT OF EVIDENCE: *Witness Corner to Meander Corner No. 4 common to Sections 22 and 23 of Township 145 North, Range 29 West of the 5th Principal Meridian.*

1874; This meander corner was originally established by P. H. Conger, his field notes indicate that this corner was marked by a post and witnessed by:

White Pine 36" North 32° East, 16 Links
White Pine 30" North 45° West, 64 Links

1898; Great Northern Railway Right-of-Way and Track map 1804CS4 shows a distance and station tie to this corner location. Information is on file with the Minnesota Department of Transportation.

1903; U.S. Army Corps of Engineers recovered this corner according to Township 145 N Range 29 W flowage map for the Leech Lake and Lake Winnibigoshish Reservoirs. Map is on file at the USFS office in Cass Lake, MN.

1995; USFS notes of Township 145 North, Range 29 West, Book 1, Page 50, on file at the USFS office in Cass Lake, MN, show R. Main and C. Krause, USFS, found evidence of both White Pine stumps, at the original bearing and distances. The corner would fall in the lake at the edge of bank which shows heavy erosion. They placed a FSLP on a 19" White Pine North 40° East and 18.5' from the calculated location.

2010; A Kadrmas, Lee & Jackson survey crew found a USFS BT from 1995 with a spike and tag labeled South 40° West, 18.5'

2012; Ross Wamre, RLS# 45334, set witness to meander corner# 4 monument with a 5/8" x 4' Rebar with a 3 1/2" Aluminum Cap up 0.8' on line near the edge of Portage Lake between the East Quarter Corner of Section 22 and the computed Meander Corner position according to the found USFS BT. Witness Corner is 22.4 feet northerly of the computed Meander Corner Position in the lake. Witnesses found and established as shown on face of this certificate.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office

Cass County Engineers Office

Cass County Surveyors Office

Northern Engineering and Consulting Inc.

United States Forest Service

MnDOT – District Office 2

Bureau of Indians Affairs – Bemidji

Bureau of Land Management's (BLM) Northeastern States Field Office