



A000600966

OFFICE OF THE COUNTY RECORDER
 CASS COUNTY, MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON

3/13/2014 2:50:13 PM

AS DOC #: A000600966

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
 CASS COUNTY RECORDER

BY SR _____ Dep

Index No. C-5

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 6
 Township 144 N, Range 25 W, 5th P.M.
 STATE OF MINNESOTA, COUNTY OF CASS


On 12/16/2010, found a(n): 2.5" Galvanized Iron Pipe With Stamped 3" Brass Cap Marked 1984, 1' Above Ground In Good Condition

- left monument as found lowered monument
 removed monument (explain) raised monument

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

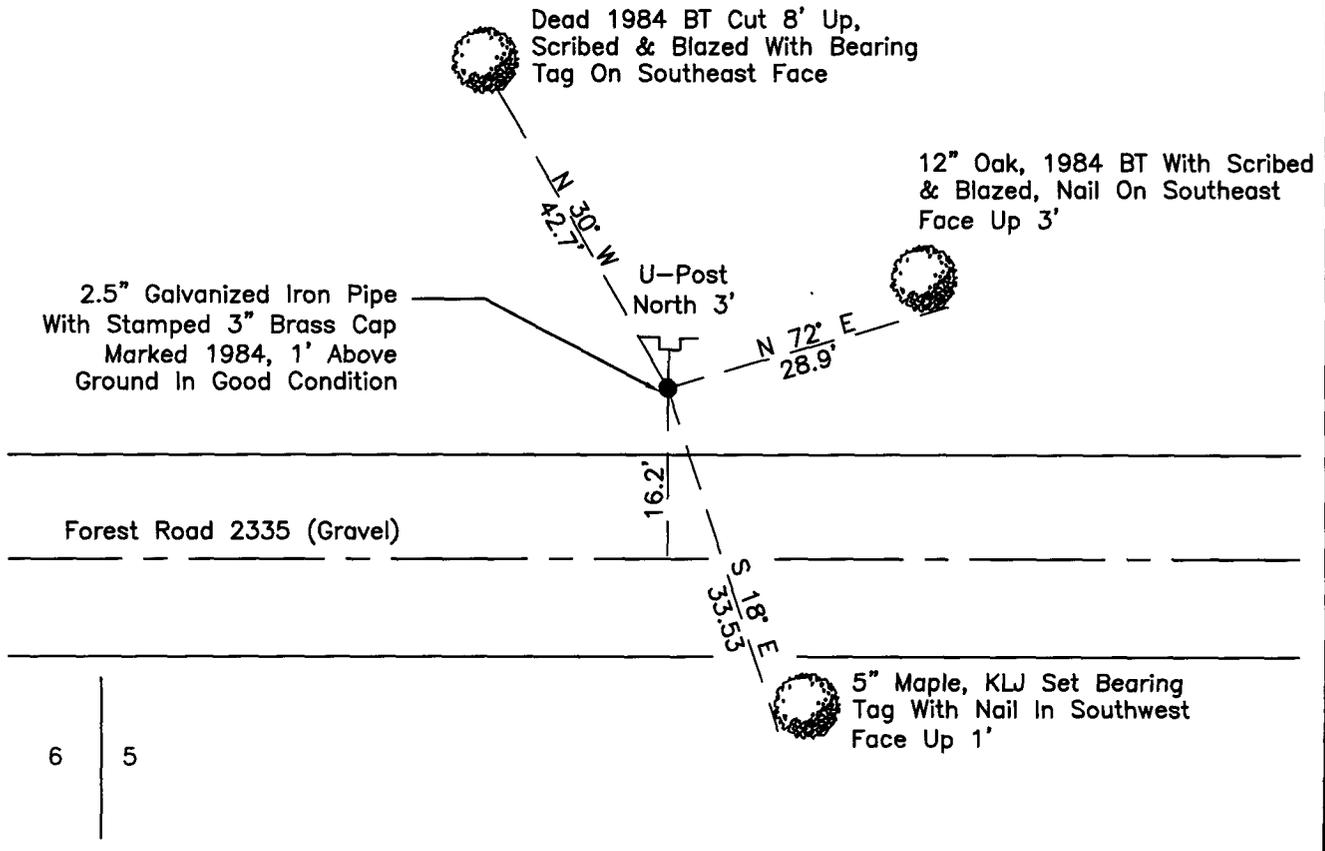

6 | 5

"SKETCH OF REFERENCE TIES"
 (not to scale - bearings are magnetic)
 Ties are measured to center of monument unless otherwise noted.
 UNITS = Metric English

UTM COORDINATES, ZONE 15
 Northing: 17193778.804
 Easting: 1422197.339

NAD 83/1996 Adjustment.
 Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
 signature

3/1/14
 date

Ross Wamre, Minnesota License No. 45334



STATEMENT OF EVIDENCE: Quarter Corner common to Sections 5 and 6 of Township 144 North, Range 25 West of the 5th Principal Meridian.

1876; Benjamin C. Baldwin, for the Government Land Office established this corner and set a post and witnessed by:

Norway Pine 14" North 75° East, 44 Links
Aspen 6" South 79° West, 10 Links

1984; Cass County Certificate of Location of Government Corner Document No. 281665, an Advance Surveying and Engineering Co. survey crew searched for this corner and references to no avail.

1984; Cass County Certificate of Location of Government Corner Document No. 281665, James H. Parker, RLS # 9235 set a 2 ½" by 5' long galvanized Iron Pipe with a 3" stamped brass cap, 1.5' above the ground, per document no. 281665. Set using "lost" method witnessed by:

Blazed White Oak 8" North 30° West, 42.73' set 20d nail, set tag
Blazed White Oak 10" North 74° East, 28.90' set 20d nail, set tag

2010; A Kadrmas, Lee & Jackson survey crew found a 2.5" galvanized iron pipe with a 3" stamped brass cap marked 1984, 1' above the ground, witnesses found and established as shown on the face of this certificate.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as established by Advance Surveying & Engineering Co. in 1984.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Engineers Office
Cass County Surveyors Office
Northern Engineering and Consulting Inc.
United States Forest Service
MnDOT – District Office 2
Bureau of Indians Affairs – Bemidji
Bureau of Land Management's (BLM) Northeastern States Field Office