

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard South Quarter Corner of Section 36  
Township 145 N , Range 27 W , 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



A000601095

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

3/20/2014 11:04:09 AM

AS DOC #: A000601095

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep

On 10/30/2012, found a(n): 2" Iron Post With A 2.5" Brass  
Cap Stamped 1937 Standing Loosely 2.0' Above Swamp


- left monument as found
- removed monument (explain)
- lowered monument
- raised monument

On \_\_\_\_\_, set a(n): \_\_\_\_\_


See "Statement of Evidence" for further details (on back)

(reserved for recording data)

Note: Willow Brush Area

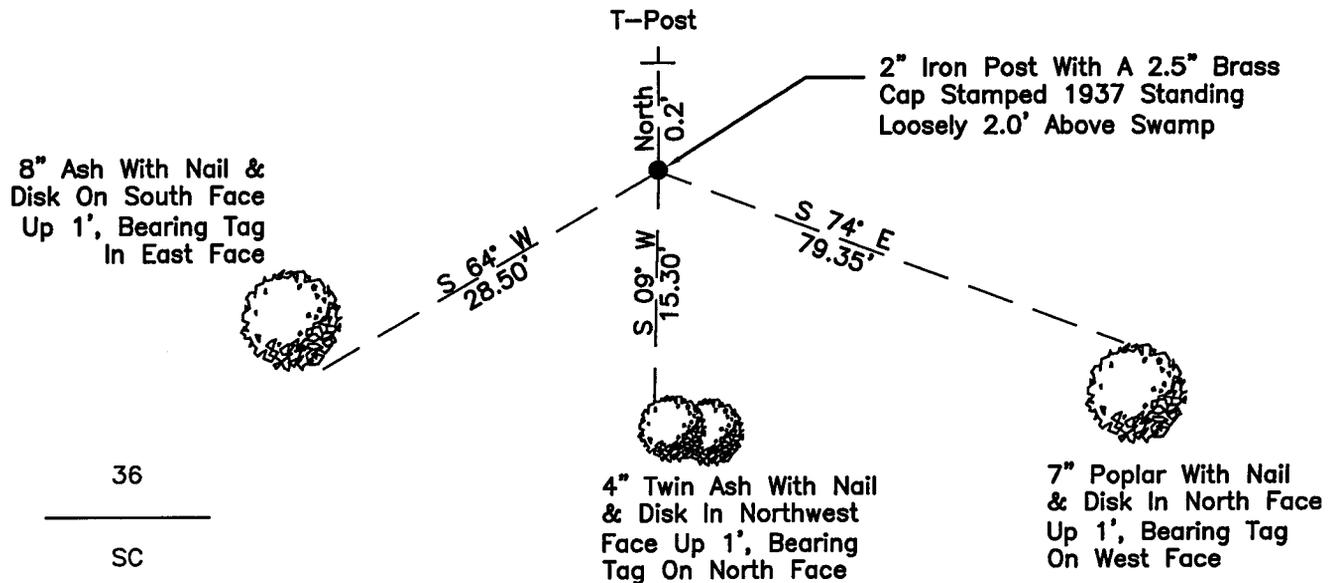

### "SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15

Northing: 17197591.570

Easting: 1382054.243

NAD 83/1996 HARN Adjustment.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre  
signature

6/25/13  
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 2 A000601095



**STATEMENT OF EVIDENCE:** Standard South Corner of Section 36 Township 145 North, Range 27 West of the 5<sup>th</sup> Principal Meridian.

**1871;** G.R. Stuntz, for the Government Land Office established this corner and witnessed by:

Black Pine 8" North 79° East, 45 Links  
Black Pine 7" North 86° West, 113 Links

**1937;** GLO dependent resurvey of the Eleventh Standard Parallel North, along the South boundary of Township 145 North, through a portion of Range 26 West and through Range 27 West, 5th Principal Meridian. Hal D. Craig found no remaining evidence of the original standard corner reestablished this corner's position by proportionate distance and set a 3 ft. long, 2" dia., 26" in the ground with a stamped brass cap and witnessed by:

Norway Pine 10" South 40 ¾° West, 105 Links marked BT

**2010;** A Kadrmas, Lee & Jackson survey crew found a 2" Iron post with a 2.5" brass cap stamped 1937 loosely standing 2 ft. above muskeg swamp, witnesses found and established as shown on the face of this certificate.

**2012;** Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office  
Cass County Engineers Office  
Cass County Surveyors Office  
Northern Engineering and Consulting Inc.  
United States Forest Service  
MnDOT – District Office 2  
Bureau of Indians Affairs – Bemidji  
Bureau of Land Management's (BLM) Northeastern States Field Office