

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 14
Township 145 N , Range 30 W , 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000601395

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

4/3/2014 11:30:06 AM

AS DOC #: A000601395

PAGES: 3

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep


On 04/19/2010, found a(n): 6" concrete monument with a
DATE
3" Brass Cap stamped 1933, 0.3' Above Ground

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On _____, set a(n): _____
DATE

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

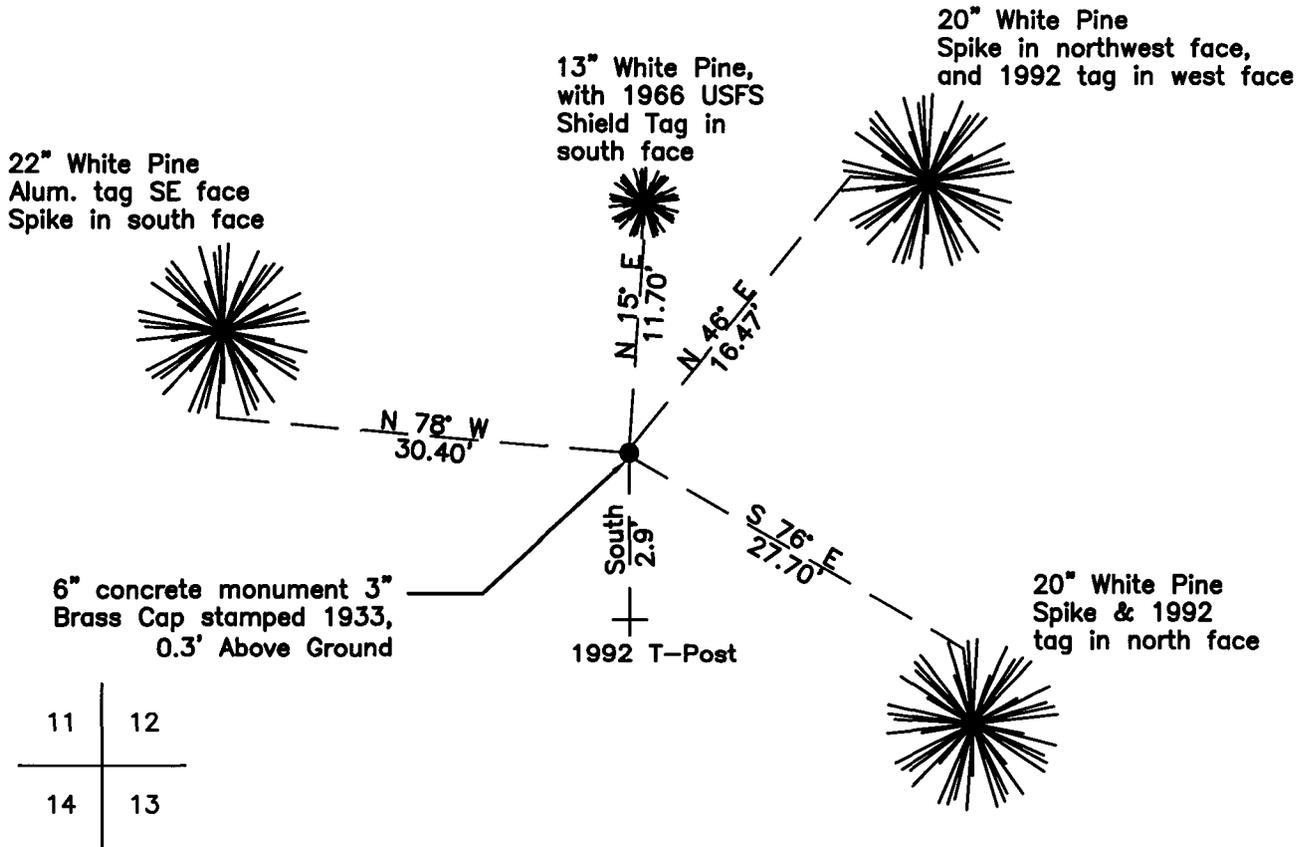

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17220103.970

Easting: 1284465.788

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

7/8/13
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 3 A000601395



STATEMENT OF EVIDENCE: Section Corner common to Sections 11, 12, 13 and 14 of Township 145 North, Range 30 West of the 5th Principal Meridian

1874; This corner was originally established by P.H. Conger for the GLO. His field notes indicate a wood post set at this corner position, witnessed by:

- Blk Pine 14" North 50° East, 80 links
- Blk Pine 6" South 55° East, 70 links
- Blk Pine 6" South 72° West, 37 links
- Blk Pine 3" North 44° West, 80 links

1928; J.A. Donery, Forest Ranger, USFS 874 forms, found a five inch stake properly scribed witnessed. Information on file with the USFS office in Cass Lake.

Jack Pine 21 Paces Northwest properly scribed

1931; Ernest Justenen, Forest Ranger, USFS 874 forms, found a squared scribed stake in place. Information on file with the USFS office in Cass Lake.

1933; Resurvey by GLO, Willis W. Bandy, from remains of original bearing trees, set a 2' long, 6" diameter concrete monument with stamped Brass Cap and witnessed by:

- Blk Pine (rotten stump) North 50° East, 80 links - 52.80 ft. (1874 tie)
- Blk Pine (stump) South 52° East, 70 links - 46.20 ft. (1874 tie)
- Blk Pine (stump) South 72° West, 37 links - 24.42 ft. (1874 tie)
- Blk Pine (rotten stump) North 44° West, 80 links - 52.80 ft. (1874 tie)

New BT:

- Jack Pine 8" North 34° East, 46 links (30.36')
- Jack Pine 8" South 36° East, 33 links (21.78')
- Jack Pine 6" South 17 ¾° West, 33 links (21.78')
- Norway Pine 16" North 41 ½° West, 178 links (117.46')

1966; W. H. Okerman, RLS #6807 and James Ebstrom, USFS Book 1 of Township 145 North, Range 30 West, page 50, found monument in good condition, 1933 BT's as stumps and scribed. An Affidavit as to Location of Government Corner is filed at the Cass County Office of register of Deeds. Corner is witnessed by:

- Jack Pine (rotten stump) North 34° East, 30.36' (1933 tie)
- Jack Pine (stump hole) South 36° East, 21.78' (1933 tie)
- Jack Pine (rotten stump with scribe) South 17 ¾° West, 21.78' (1933 tie)
- Norway Pine (stump with scribe) North 41 ½° West, 117.46' (1933 tie)

New BT:

- Jack Pine 6" North 15° West, 11.7' scribed S 11 BT
- Jack Pine 9" North 61° East, 17.5' scribed S 12 BT
- Jack Pine 9" South 20° East, 12.4' scribed S 13 BT
- Jack Pine 10" South 47° West, 19.2' scribed S 14 BT



1992; Brama, USFS Book 1 of Township 145 North, Range 30 West, page 50, found concrete cylinder set in place, brass cap set 1" above ground but didn't look for original evidence because of snow depth.

- Jack Pine 8" North 15° West, 11.7' scribed S 11 BT (1966 tie)
- Jack Pine (snagged) 11" North 61° East, 17.5' scribed S 12 BT (1966 tie)
- Jack Pine (snagged) 11" South 20° East, 12.4' scribed S 13 BT (1966 tie)
- Jack Pine (not very healthy) 12" South 47° West, 19.2' scribed S 14 BT (1966 tie)

New BT:

- N. Pine 10" South 33° West, 47.74' scribed S 14 BT
- N. Pine 12" North 30° West, 99.30' scribed S 11 BT
- W. Pine 9" North 46° East, 16.47' scribed S 12 BT
- W. Pine 11" South 76° East, 27.70' scribed S 13 BT
- 8' Steel Sign Post, South 2.9' with sign

2010; A Kadrmas, Lee & Jackson survey crew found a 6" concrete monument with a 3" Brass cap standard GLO monument stamped 1933, 0.3' above ground. Witnesses found and established as shown on the face of this certificate.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

- Cass County Recorder's Office
- Cass County Engineers Office
- Cass County Surveyors Office
- Northern Engineering and Consulting Inc.
- United States Forest Service
- MnDOT – District Office 2
- Bureau of Indians Affairs – Bemidji
- Bureau of Land Management's (BLM) Northeastern States Field Office