

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 19
Township 145 N , Range 30 W , 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000601399

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

4/3/2014 11:30:10 AM

AS DOC #: A000601399

PAGES: 3

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR Dep


On 04/14/2010, found a(n): 6" concrete monument with a
DATE
2" Brass cap stamped 1933, 2" Above Ground

- left monument as found lowered monument
 removed monument (explain) raised monument

On , set a(n):
DATE

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

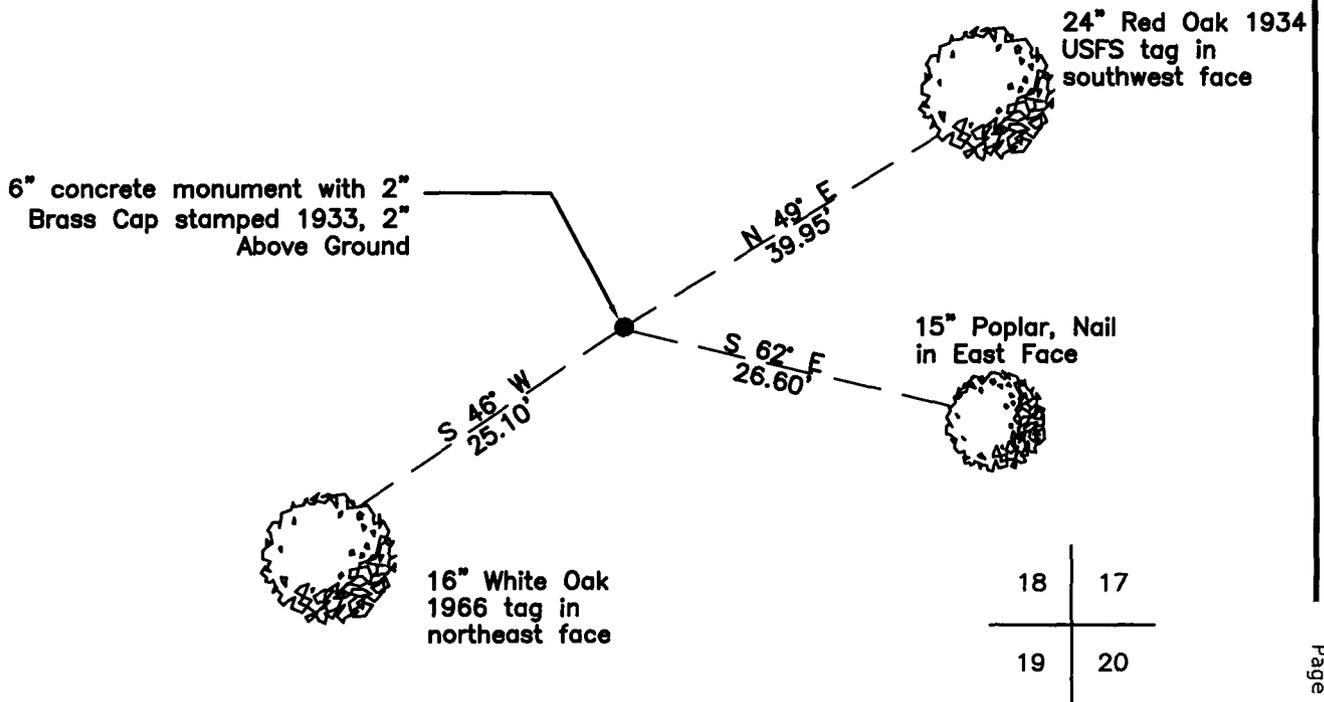

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17214990.490

Easting: 1263468.056

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

7/8/13
date

Ross Wamre, Minnesota License No. 45334





STATEMENT OF EVIDENCE: Corner common to Sections 17, 18, 19 and 20 of Township 145 North, Range 30 West of the 5th Principal Meridian

1874; This corner was originally established by P.H. Conger for the Government Land Office. His field notes indicate a post set at this corner position, witnessed by:

Yellow Pine 20" North 75° West, 5 links
Aspen 6" North 75° East, 35 links
Aspen 3" South 38° East, 20 links
Aspen 6" South 53° West, 24 links

1916; Railroad Valuation Map 1141CS3. Minneapolis St. Paul & Sioux St. Marie Railway Company's Right of Way and Track Map shows an angle and distance tie from the railroad to this corner. Information on file with the Minnesota Department of Transportation.

1933; Resurvey by GLO, Willis W. Bandy, set by lost proportionate methods, a 6" diameter concrete monument with stamped Brass Cap and witnessed.

Oak 7" North 49 ½° East, 58 links
Oak 8" South 81 ¾° East, 72 links
Oak 7" South 74 ½° West, 46 links
Oak 7" North 54° West, 79 links

1934; J.A. Gjelhaug, CCC, RLS# 1337, USFS 874 forms, found a 5" Brass Cap in Concrete 3" above ground and witnessed.

Maple (Oak) 7" North 49° East, 59 links, mrkd S 17 BT (1933 tie)
Black Oak (Oak) 7" South 83° East, 72 links, mrkd S 20 BT (1933 tie)
Maple (Oak) 6" South 75° West, 45 links, mrkd S 19 BT (1933 tie)
Maple (Oak) 6" North 54° West, 79 links, mrkd S 18 BT (1933 tie)

1946; State of Minnesota Department of Highways Right-of-Way Index map file 32-86 shows a Brass Cap Set in Concrete in place at this corner location. Information on file with the Minnesota Department of Transportation.

1966; William H. Okerman, RLS #6807 and M. Hansey, USFS Book 2 of Township 145 North, Range 30 West, page 13, found monument in good condition along with three of the original bearing trees. An Affidavit as to Location of Government Corner is on file at the Cass County Office of Register of Deeds. Corner is witnessed by:

Oak 13" North 49 ½° East, 38.28' with scribe (1933 tie) re-scribed
Oak 12" South 81 ¾° East, 47.52' with scribe (1933 tie) re-scribed
Oak (decayed stump) North 54° West, 52.14' with scribe (1933 tie)

New BT:

Red Maple 7" North 65° West, 30.55', mrkd S 18 BT
Oak 7" South 46° West, 25.1", mrkd S 19 BT



2002; R. Main, USFS Book 2 of Township 145 North, Range 30 West, page 13, found corner in place up 2" under large aspen windfall. Clear cut west of corner mixed hardwoods northeast. Corner is witnessed by:

Oak 17" North $49\frac{1}{2}^{\circ}$ East, 39.35' with USFS tag and scribe (1933 tie)

Oak 12" South 46° West, 25.1", with tag & scribe (1966 tie)

2010; A Kadrmas, Lee & Jackson survey crew, found a 6" concrete monument with a 2" Brass Cap stamped 1933, 2" above ground. Witnesses found and established as shown on the face of this certificate.

2012; Ross Wamre, PLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office

Cass County Engineers Office

Cass County Surveyors Office

Northern Engineering and Consulting Inc.

United States Forest Service

MnDOT – District Office 2

Bureau of Indians Affairs – Bemidji

Bureau of Land Management's (BLM) Northeastern States Field Office