

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 21
Township 145 N, Range 30 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000601400

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

4/3/2014 11:30:11 AM

AS DOC #: A000601400

PAGES: 3

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

On 04/14/2010, found a(n): 2.5" Brass Cap GLO Monument
on a 3/4" Iron Pipe

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument


On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

16

21

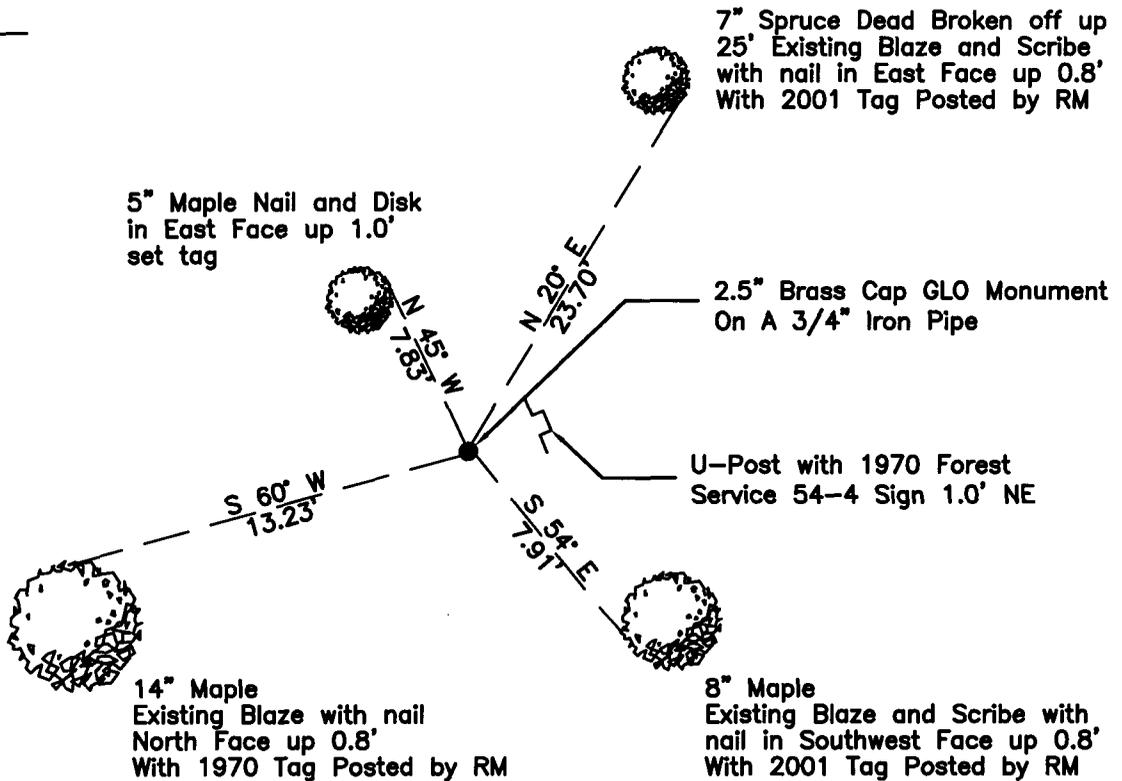

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English



UTM COORDINATES, ZONE 15

Northing: 17214752.920

Easting: 1271291.000

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

7/8/13
date

Ross Wamre, Minnesota License No. 45334





STATEMENT OF EVIDENCE: Quarter Corner common to Sections 16 and 21 of Township 145 North,
Range 30 West of the 5th Principal Meridian

1874; This corner was originally established by P.H. Conger for the Government Land Office. His field notes indicate a wood post set at this corner position, witnessed by:

White Pine 10" South 12° West, 16 links
Sugar Maple 4" North 8° East, 28 links

1933; Resurvey by GLO, Willis W. Bandy as determined from the remains of the original bearing trees. Set an iron post, 3' long, 1" diameter, 27" in the ground with a brass cap witnessed by:

White Pine Stump 16" South 12° West, 16 links (original BT)
Burr Oak 8" North 58 ¼° East, 11 links mkd. ¼ S 16 BT
Red Oak 8" South 5 ¾° East, 57 links mkd. ¼ S 21 BT

1934; USFS 874 Form on file at the USFS office in Cass Lake, MN show J.A. Gjelhaug, RLS #1337, USFS, found a stamped brass capped 1" Iron Pipe, 10" above ground witnessed by:

Norway Pine Stump 16" South 11° West, 15¾ Links (1874 Tie)
White Oak 5" North 59° East, 11 Links (1933 Tie)
Red Oak 10" South 8° East, 57½ Links (1933 Tie)

1970; USFS notes of Township 145 North, Range 30 West, Book2, Page 31, on file at the USFS office in Cass Lake, MN show Curt Kruse, USFS, found iron and cap in place 14" above ground in good condition. Corner was found under a sheared pile. A small stand of trees remains around corner. Both BT were destroyed by shearing around the corner witnessed by:

W. Spruce 6" North 24° West, 20.4' scribed "¼ S16 BT"
Maple 5" South 57° West, 13.2' scribed "¼ S21 BT"
Set FSLP on 3" dia. Cedar Post West, 180'
72" Steel Sign Post East, 1.0' 54-4 Sign Attached

2001; USFS notes of Township 145 North, Range 30 West, Book 2, Page 31, on file at the USFS office in Cass Lake, MN show R. Main, USFS, found GLO iron in place witnessed by:

Maple 12" South 60° West, 13.23' scribe overgrown, set spike (1970 Tie)
Maple 5" South 54° East, 7.91' set spike, marked: "X BT"
Spruce 7" North 20° East, 23.70' set spike, marked "S16 BT"
Found Post on ground West, 180' (1970 Tie)
Red Oak 16" West, 700' Set FSLP

2010; A Kadrmas, Lee & Jackson survey crew found a 2.5" Brass Cap GLO Monument on a ¾" Iron Pipe, witnesses found and established as shown on face of this certificate.

2012; Ross Wamre, PLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.



Contacts pertaining to this corner are as follows:

Cass County Recorder's Office

Cass County Engineers Office

Cass County Surveyors Office

Northern Engineering and Consulting Inc.

United States Forest Service

MnDOT – District Office 2

Bureau of Indians Affairs – Bemidji

Bureau of Land Management's (BLM) Northeastern States Field Office