



A000602558

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

5/22/2014 10:49:36 AM

AS DOC #: A000602558

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep

Twp 135 Rge 29 Index No. E.0-07.0

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter of Section 8, Township 135 N., Range 29 W., 5th P.M.  
State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 9 Jan 2007 found a 2.5 inch outside diameter iron pipe, up 0.2 foot,  
north of small depression.

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed \_\_\_\_\_

#### SKETCH OF REFERENCE TIES NOT TO SCALE

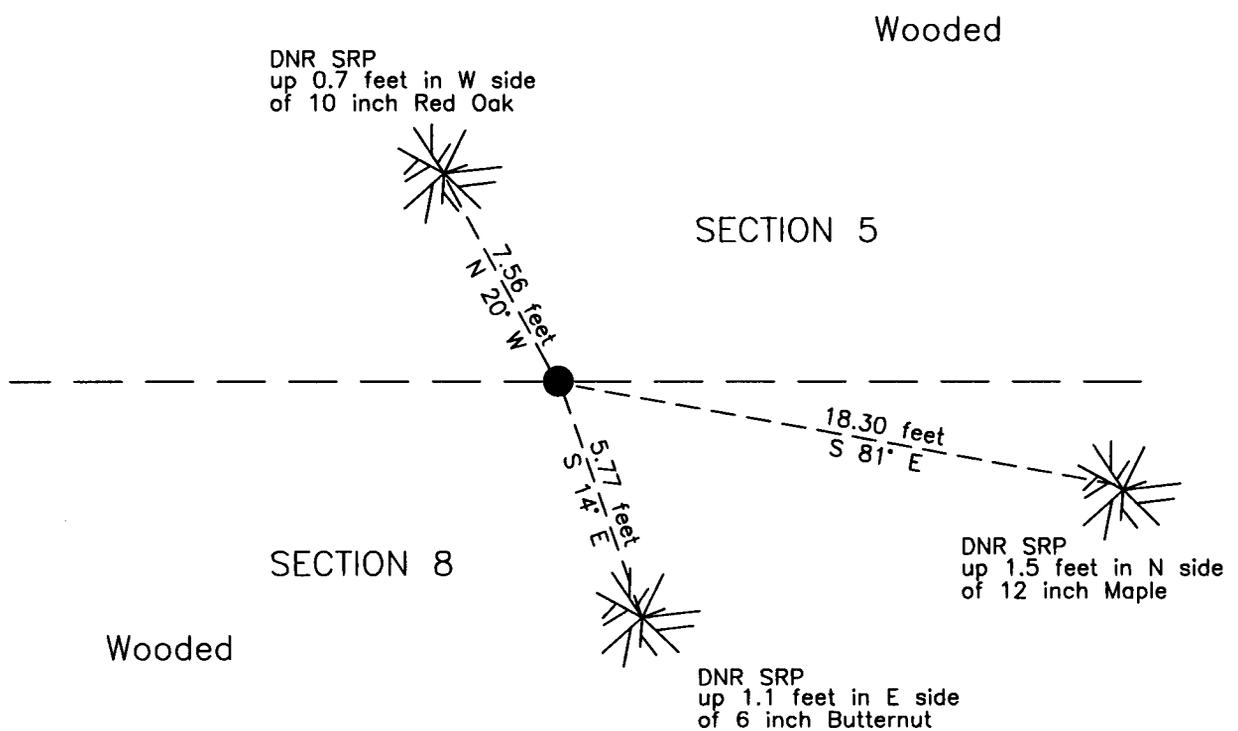

NOTE:  
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor  
Date 5/21/14 MN License No. 21367



Page 1 of 2

A000602558

Statement of Evidence**North Quarter corner of Section 8, Township 135 North, Range 29 West, 5th Principal Meridian.**

- June 1865 G.B. Wright, GLO Deputy Surveyor in the notes of the subdivision of Township 135 North, Range 29 West, set a post for the original corner and referenced it as follows:  
8" Aspen S 22° W 26 links (17.16 feet) 9" Blk. Pine N 53° E 14 links (9.24 feet)  
The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).
- May 1917 J.W. Curo, LS 1428, Curo Book 216, page 54 and Curo Book 56, page 95, on file in the CCHD/SO, states "run a compass line half a mile East and look for the ¼ bet 5 & 8- but do not find it."
- Aug. 1928 J.W. Curo, LS 1428, Curo Book 216, page 137, on file in the CCHD/SO, states "2640 E run S 16°40' W 13.65 to true ¼ Cor Bet 5-8-135-29, 2 x 2 x 20 Oak" and lists witnesses as follows:  
8" Burr Oak N 47°10' E 52.35 feet 8" J. Pine N 25°03' W 62.00 feet  
7" Pop N 78°50' W 14.33 feet 8" Burr Oak S 60°05' E 29.35 feet
- 1971 L. Mengis, Cass County Highway Department (CCHD) technician, notes of S.A.P. 11-629-05 on file in the CCHD, states 2" I.P. 432.91 feet south of P.O.T. Station 27+00.
- April 1978 M. Landecker, LS 7452, Plat of **TOUMIS PINE ACRES**, recorded in the Cass County Records Office as **Document Number 238015** indicates an iron monument.
- April 1982 Landecker and Associates, Inc. (LAI), sketch of field notes and calculations, on file in the Pequot Lakes LAI office indicates 1 1/2 inch iron and no ties.
- April 1984 T. Freeman, technician and D. Marcum, forester, Cass County Land Corner Record, on file in the CCHD/SO, indicates a found 2 1/4" iron up 0.2' and the following references:  
12" Red Oak S 89° E 18.30 feet 8" Red Oak N 20° W 7.40 feet
- June 2003 P.J. Axness, Minnesota Department of Natural Resources (DNR), file FMA00508.00.00.01, indicates a found 2" IDIP up 0.2' and lists references to DNR RP's as follows:  
12" Oak N 25° W 7.78 feet 15" Oak East 18.27 feet  
8" Ash S 20° E 5.73 feet
- Jan. 2007 B. Hippen, technician, Records of the CCHD/SO, found a 2.5 inch outside diameter iron pipe, up 0.2 foot, and the 2003 DNR witnesses.
- May 2014 B. Hippen, technician, records of the CCHD/SO, found monument and witnesses from 2003. The recovered and established references for the position are shown on the face of this document.

**Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered in 2007 by the CCHD/SO is the accepted location of this corner.**

**County Coordinates (Cass County South)**

**Northing 235922.96**

**Easting 526403.01**