



A000602563

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

5/22/2014 10:49:41 AM

AS DOC #: A000602563

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep

Twp 135 Rge 29 Index No. A.0-11.0

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter of Section 4, Township 135 N., Range 29 W., 5th P.M.  
State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 17 Jan 2007 found a 2 inch OD well point, up 1.5 feet, 40 feet± East of  
open water.

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed \_\_\_\_\_

#### SKETCH OF REFERENCE TIES NOT TO SCALE

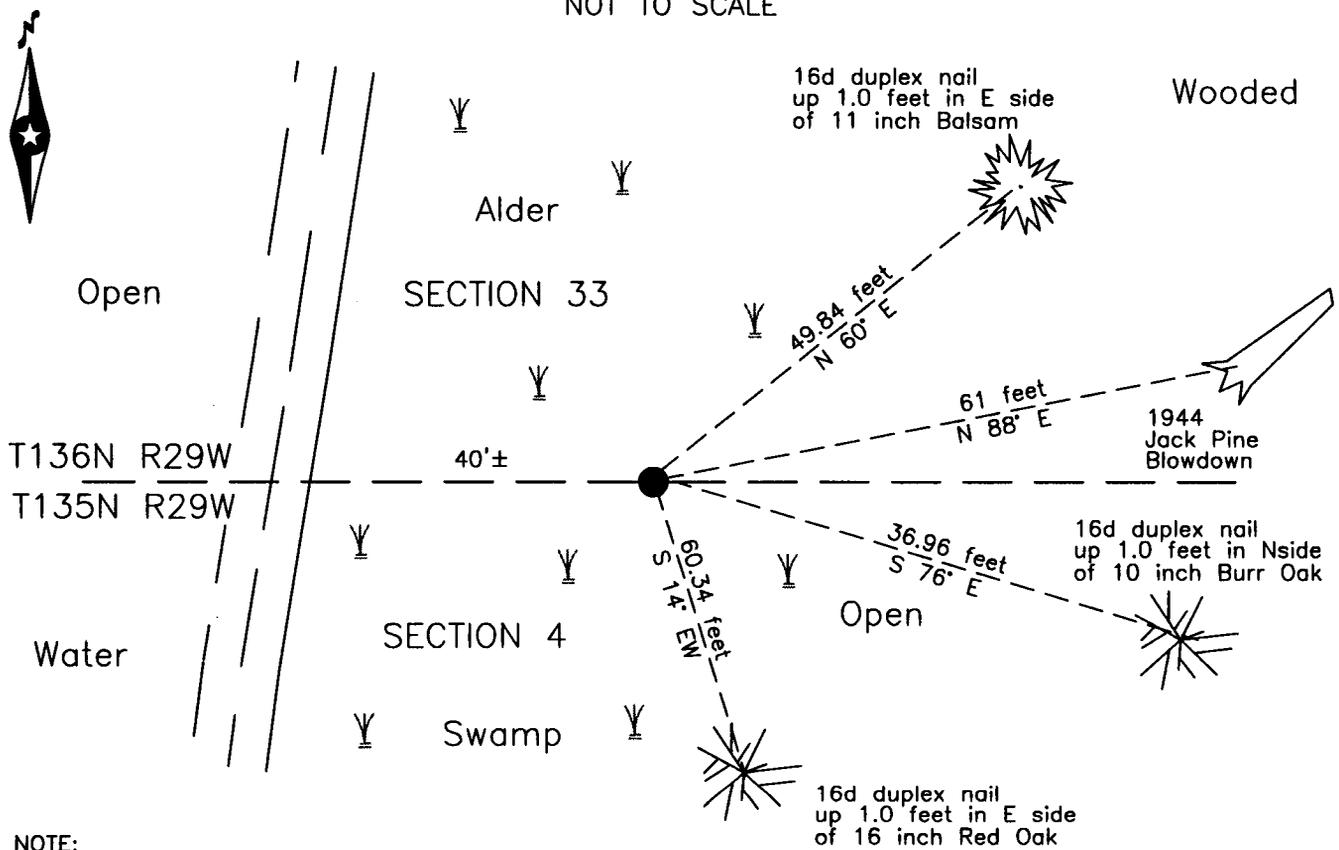

NOTE:  
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor  
Date 5/21/14 MN License No. 21367





Statement of Evidence

**North Quarter corner of Section 4, Township 135 North, Range 29 West, 5th Principal Meridian.**

June 1858 E.N. Darling, General Land Office (GLO) Deputy Surveyor, in the notes of the survey of the north line of Township 135 North, Range 29 West, set a post for the original corner in his survey and referenced it as follows:  
7" Pine S 57°E 112 links (73.9 feet) 12" Elm N 47°E 55 links (36.3 feet)  
The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).

May 1917 J.W. Curo, LS 1428, Curo Book 56, page 110, on file in the CCHD/SO, states "At 5280 look for the ¼ corner bet secs 4 and 33 T135-136-29 where US notes call for post and BTs. All are gone and we continue West."

June 1944 J.W. Curo, LS 1428, Cass County Surveyor, Curo Book 236, page 147, on file in the CCHD/SO, states "5508.8 ¼ Cor. sets West 0.50. Set 2 x 3 ½ ft. pump point look in soft marsh for true ¼ corner bet 4-33 T135-136 N R 29 W." He lists new references as follows:  
24" J. Pine N 87° E 60.90 feet 10" Red Oak S 20° E 60.50 feet

April 1982 Landecker and Associates, Inc., sketch of field notes and calculations, on file in the Pequot Lakes office and a copy on file in the CCHD/SO, indicates calc corner and check for 1917 ties.

July 1998 D Landecker, LS 17008, Certificate of Survey, file 98522, on file in the Pequot Lakes office and a copy on file in CCHD/SO, indicates a monument found.

Jan. 2007 B. Hippen, technician, CCSO, notes of the CCSO, found a 2 inch outside diameter well point, up 1.5 foot, 30' +/- into swamp from the East and 40' +/- East of open water. Also the remains of the 1944 witness trees and new references as follows:  
J. Pine(down) N 88° E 61 feet 16" Red Oak S 14° E 60.34 feet  
11" Balsam N 60° E 49.84 feet 10" Burr Oak S 76° E 36.96 feet

The recovered and established references for the position are shown on the face of this document.

**Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered by CCHD/SO is the accepted location of this corner.**

**County Coordinates (Cass County South)**

**Northing 241404.15**

**Easting 531770.61**