

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 28, Township 138N, Range 31W, 5th p.m., State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 11/08/2012 found a 2" IRON PIPE, UP 0.5', IN A FLOATING BOG, 270' +/- NORTH OF ROAD
Date

left monument as found lowered monument removed monument (explain)

On _____ placed a _____
Date

SKETCH OF REFERENCE TIES

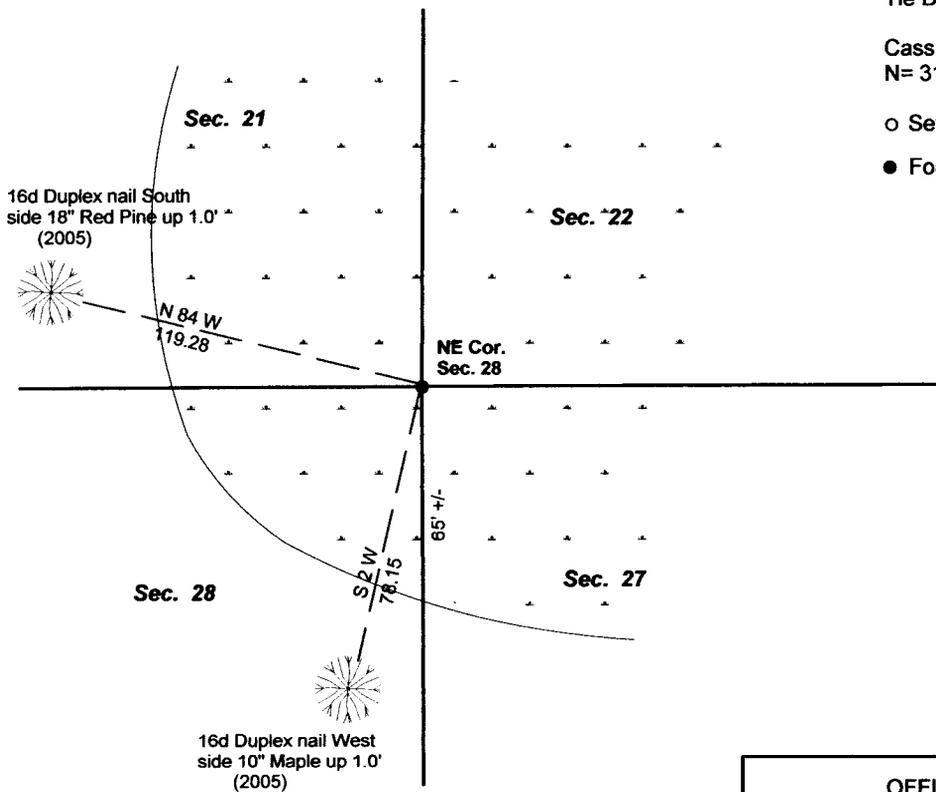


Tie Distances are measured to the spikes.

Cass County Coordinate System (South Zone)
N= 315344.7270 E= 466980.6710

○ Set Re-Rod with RLS cap No. 17774

● Found Pipe



NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R Kohout 28 Dec 2012
Marvin R. Kohout Date

Registration No. 17774

Land surveyor

OFFICE OF COUNTY RECORDER



A000603798

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

7/10/2014 11:20:29 AM

AS DOC #: A000603798

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR _____ Dep

Page 1 of 2 A000603798



INDEX NO. R.0 - 13.0

STATEMENT OF EVIDENCE

NORTHEAST CORNER SECTION 28, TOWNSHIP 138N, RANGE 31W, 5TH P. M.

- NOV. 1870 T.B. WALKER, GENERAL LAND OFFICE (GLO) DEPUTY SURVEYOR SET A POST AND MARKED B.T.'S. REFERENCES ARE:
 4" TAMARACK 6" TAMARACK 12" TAMARACK 6" TAMARACK
 N47W N22E S37W S52E
 6 LKS (3.96') 13 LKS (8.58') 35 LKS (23.10') 22 LKS (14.52')
- MAY 1915 R. BRYANT, DEPUTY COUNTY SURVEYOR, SURVEY RECORD NO. 297, BOOK "B" PAGE 287, ALSO ON MICROFILM ROLL 10, BOOK 58 PAGE 12 ON FILE IN THE CCSO STATES "FOUND ALL TREES DOWN AND FIND POST WHICH CHECKS" DITCH BOOK 108 FOR COUNTY DITCH NO. 16, INDICATES HE RAN A RANDOM LINE BETWEEN SECTIONS 22 AND 27, AT 5387.3 CORNER SETS 57.0' SOUTH
 3" SPRUCE 4X48" TAM STAKE 4X48" TAM STAKE 6" DEAD TAM
 N45E N45W S45W S45E
 46.7' 46.7' 46.7' 42.7'
- OCT. 1915 J.A. JOHNSTON, CASS COUNTY, SURVEY RECORD NO. 365, BOOK "B" PAGE 587 ALSO ON MICROFILM ROLL 11, BOOK 89 PAGE 32 ON FILE IN CCSO, NOTES HE FOUND ALL FOUR BEARING TREES AND STATES "THE UPPER PART OF ORIGINAL SECTION CORNER POST WAS FOUND STANDING IN MOSS. POSITION OF CORNER WAS LOCATED BY CHAIN MEASUREMENTS AND WE DROVE JACK PINE POST 4" SQ X 4' LONG IN PLACE TO MARK SECTION CORNER
- NOV. 1916 E.B. HORST LS NO. 376, DEPUTY COUNTY SURVEYOR, SURVEY RECORD NO. 350 BOOK "B" PAGE 537 ALSO ON MICROFILM ROLL 10, BOOK 53 PAGE 65 ON FILE IN CCSO, STATES "SET IRON MONUMENT AT SECTION CORNER TO SECTIONS 21-22 27-28."
- SEPT. 1920 M. MORRIS, CASS COUNTY, SURVEY RECORD NO. 447, BOOK "C" PAGE 391 ON FILE IN CCSO, STATES "BEGINNING AT A DULY ESTABLISHED SECTION CORNER PREVIOUSLY REESTABLISHED BY E.B. HORST AND MARKED BY AN IRON MONUMENT
- 1983 T. FREEMAN, CCSO TECHNICIAN AND D. MARCUM, CASS COUNTY LAND DEPT. FORESTER, RECORDS OF THE CCSO, FOUND PIPE IN SWAMP
- JULY 2006 B. HIPPEN, CCSO TECHNICIAN, RECORDS OF THE CCSO, FOUND A 2" OUTSIDE DIAMETER IRON PIPE, UP 0.5' IN FLOATING BOG WITH SOLID BOTTOM
- DEC 2012 MARVIN KOHOUT, LS NO. 17774, AND DOUG STILLE, TECHNICIAN, OF KOHOUT LAND SURVEYING FOUND A 2" DIAMETER IRON PIPE, UP 0.5' IN A FLOATING BOG. ACCEPTED THE PIPE AS MARKING THE LOCATION OF THE CORNER.