



A000608143

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

12/12/2014 10:06:16 AM

AS DOC #: A000608143

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Twp 140 Rge 26 Index No. V.0-03.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter corner of Section 31, Township 140 N., Range 26 W., 5th P.M.


State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 26 Aug 2008 found remains of a charred stake, at bearing and distance
from a pine snag with a BT scar.

left monument as found lowered monument removed monument (explain)

On 9 Dec 2014 placed an 1 inch by 30 inch aluminum tube with aluminum cap,
up 0.6 foot, at location of charred stake remains.

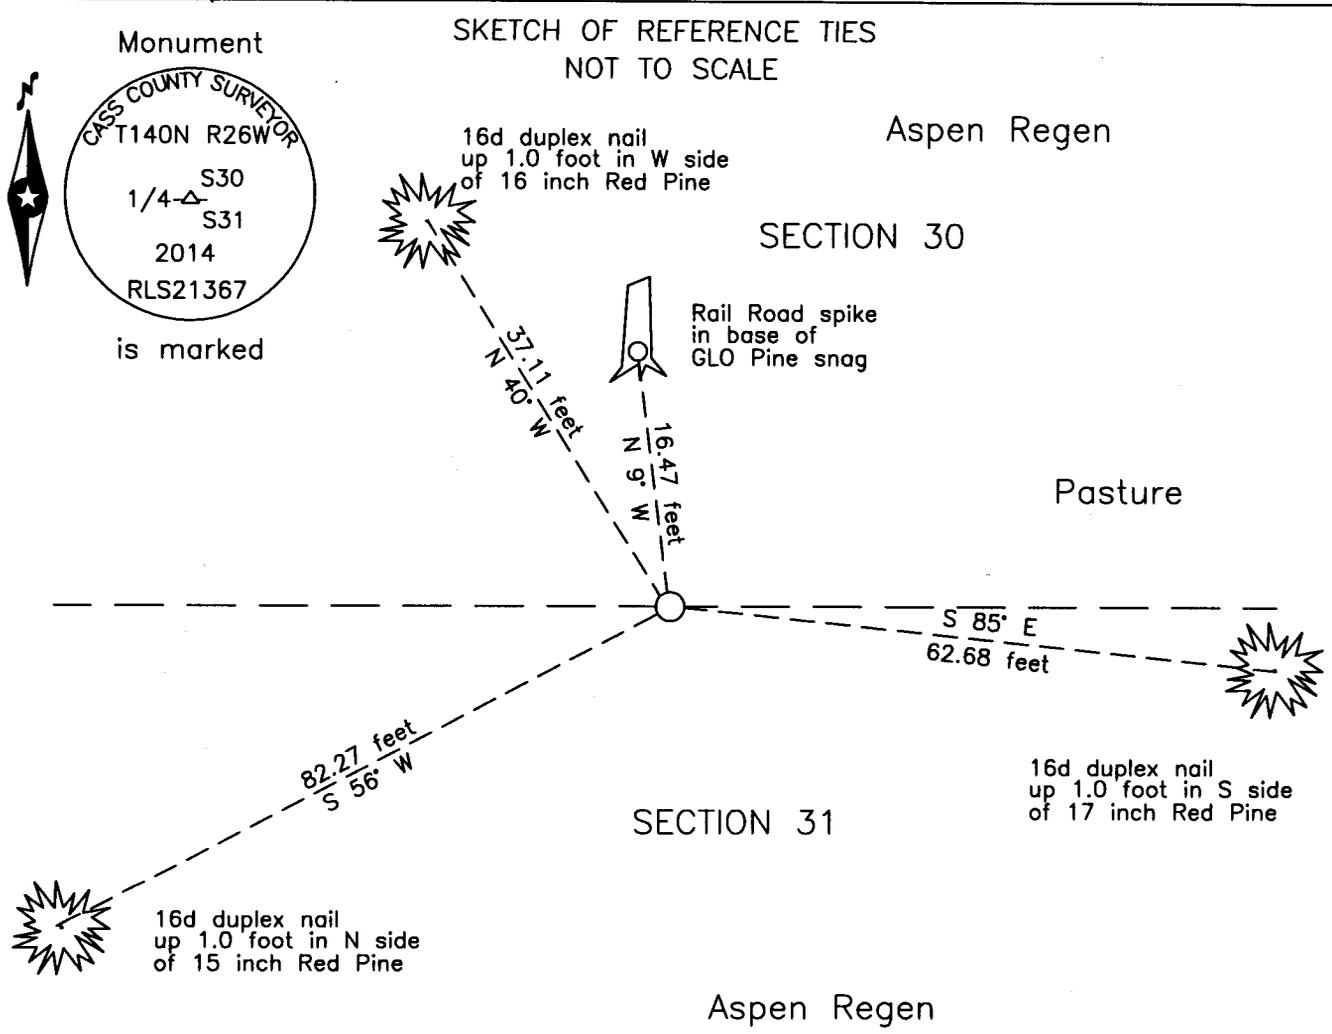

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor
Date 12/10/14 MN License No. 21367





Statement of Evidence

North Quarter corner of Section 31, Township 140 North, Range 26 West, 5th Principal Meridian.

May 1871 Allen and Putnam, General Land Office (GLO) Deputy Surveyors, notes for the subdivision of Township 140 North, Range 26 West, set a post for the original corner and referenced it as follows:
18" N. Pine N 13° W 23 links (15.18 feet)

The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).

Aug. 2008 B. Hippen, technician, records of the CCHD/SO, found a Pine snag with a scar on the southeast side and remains of charred wood at the GLO bearing and distance.

Dec. 2014 B. Hippen, technician, records of the CCHD/SO, set a 1 inch aluminum tube with aluminum cap at the location of the charred wood post remains on a side slope and witnessed as follows:

RR spike in GLO Pine snag	N 9° W	16.47 feet	17" N. Pine	S 85° E	62.68 feet
15" N. Pine	S 56° W	82.27 feet	16" N. Pine	N 40° W	37.11 feet

The recovered and established witnesses for this corner position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument established in 2014 by the CCHD/SO, is the correct perpetuation of this corner.

County Coordinates (Cass County North)

Northing 136941.83

Easting 549531.22