



A000608285

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

12/18/2014 10:49:09 AM

AS DOC #: A000608285

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Twp 142 Rge 27 Index No. C.0-03.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Center Quarter corner of Section 6, Township 142 N., Range 27 W., 5th P.M.


State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 1 July 2009 found a 1 inch outside diameter iron pipe with GLO brass cap,
up 2.0 feet, 1.5 feet south of fence corner.

left monument as found lowered monument removed monument (explain)

On _____ placed _____

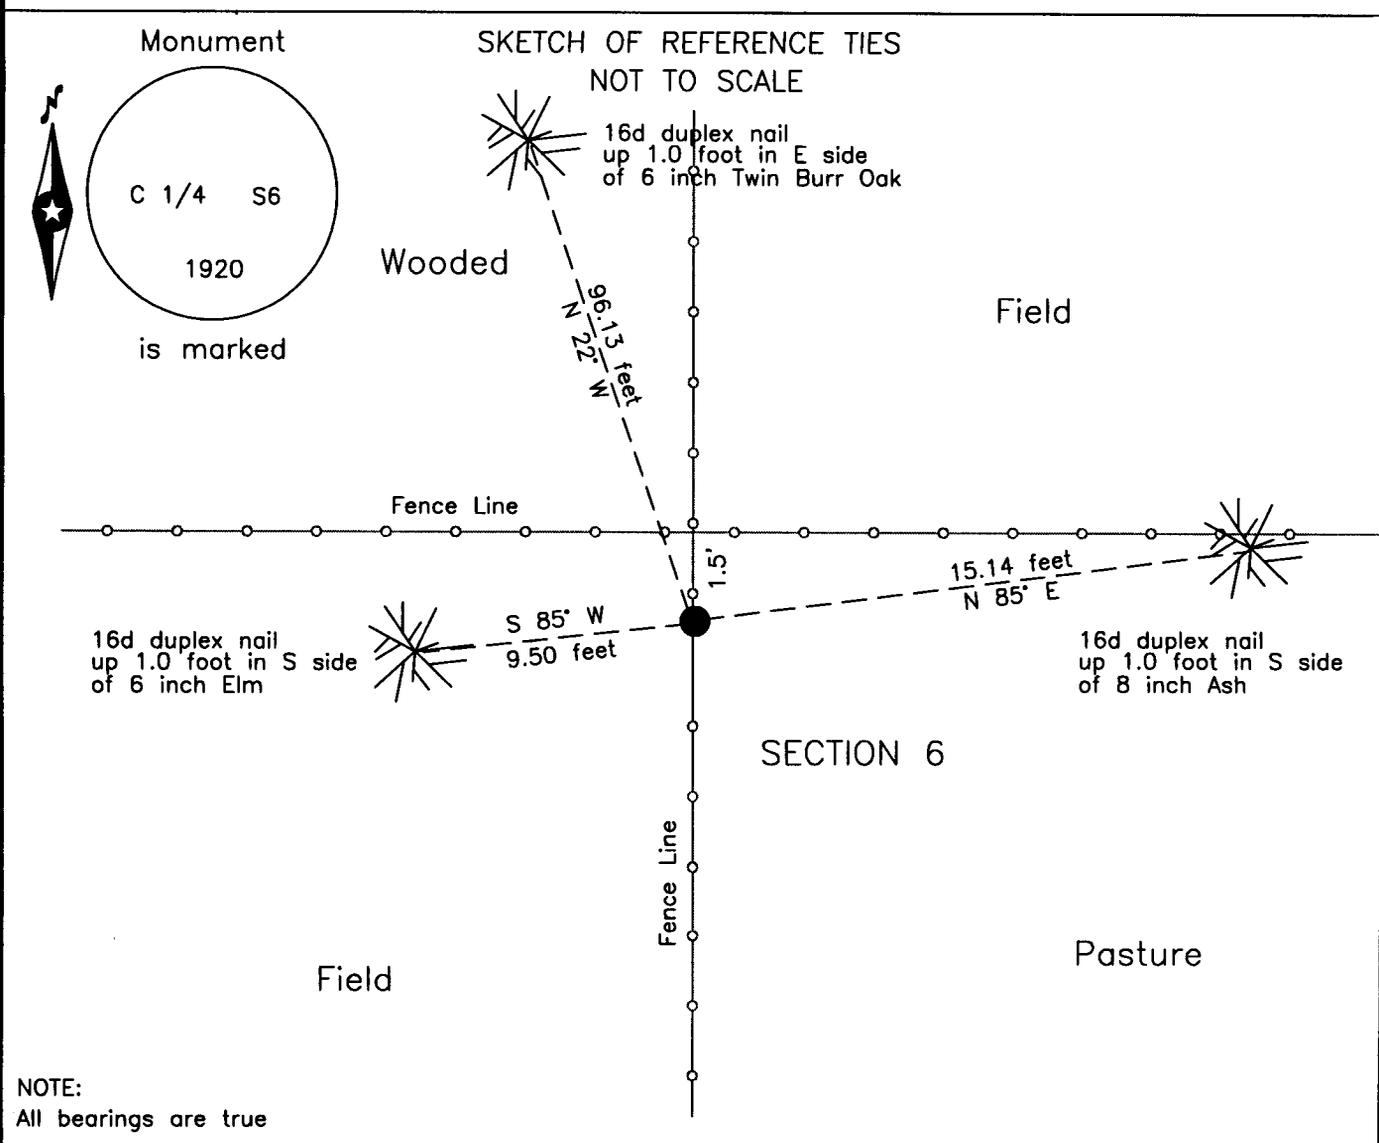

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor
Date 12/17/14 MN License No. 21367





Statement of Evidence

Center Quarter corner Section 6, Township 142 North, Range 27 West, 5th Principal Meridian.

1920 E.G. Harrington, U.S. Cadastral Engineer, assisted by D.B. Clement, U.S. Surveyor, GLO, Reestablishment of a portion of the Exteriors and Subdivisional Lines Township 142 North, Range 27 West, states "I set an iron post, 3 ft. long, 1 ins. diam., 26 ins. in the ground, for the C. ¼ sec. cor. with brass cap". The following new witness is are listed:

10" Basswood S 66 ¾° E 38 links (25.08 feet) No other tree suitable for bearing tree.
The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the CCHD/SO.

July 2009 B. Hippen, technician, records of the CCHD/SO, found 1 inch outside diameter iron pipe with GLO brass cap, up 2.0 feet, 1.5 feet South of fence corner and witnessed as follows:

8" Ash N 85° E 15.14 feet 6" Twin B. Oak N 22° W 96.13 feet
6" Elm S 85° W 9.50 feet

The monument, as well as the recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set by the CCHD/SO in 2009 is the accepted location of this corner.

County Coordinates (Cass County North)

Northing 224967.28

Easting 517155.01