



A000608486

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

12/26/2014 9:18:33 AM

AS DOC #: A000608486

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep TX#: 120142

Page 1 of 2 A000608486

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

PATRICK A. TROTTIER

Date: 12-16-14 License No: 41002
41002

East Quarter Corner of Section 11, Township 135 North, Range 30 West, 5th P.M.

On 9-12-2013 found a 2" iron pipe flush with ground at fence corners


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES

Corner Index: G-21

Not to Scale

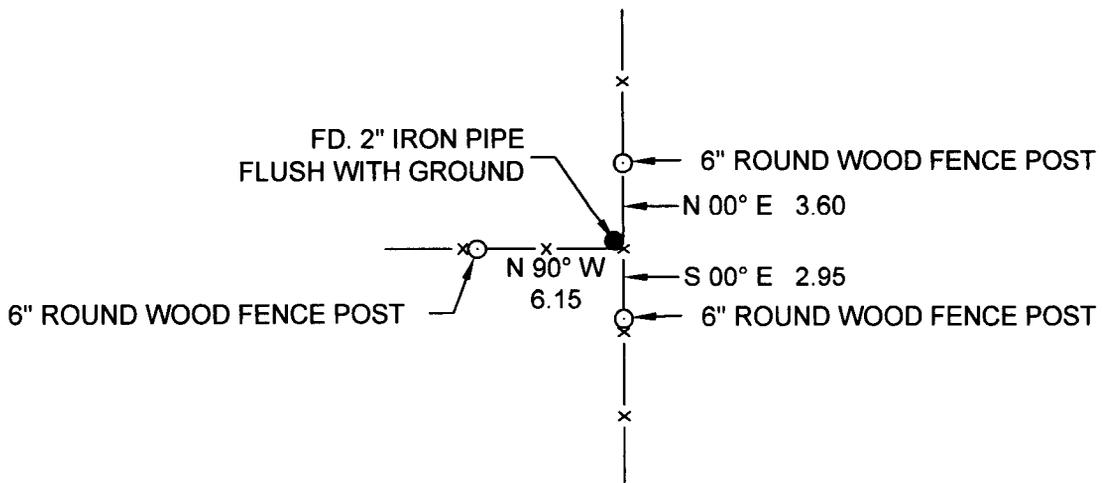

Statement of evidence for this corner position is on the back of this page



Statement of Evidence

**East quarter corner, Section 11, Township 135 North, Range
30 West, 5th Principal Meridian, Cass County, Minnesota**

1869 – Original U.S. Government Survey establishing this corner was performed. A wood post was set marking its location from which the following witnesses were established:

4" Aspen	S 51° W	67 links
2" Alder	S 4° E	48 links

Records on file with the Secretary of State and copies are in the Cass County Highway Department/Surveyor's Office (CCHD/SO).

1916 – As recorded in Curo Field Book 56, pages 64-67 and in Survey Record 315, County Survey Record Book B, pages 374-376, John Curo set corner by single proportion method. No witnesses were established. On file in CCHD/SO.

2013 – Patrick Trottier, PLS 41002, found no evidence of corner. Position was considered lost and established by single proportion method between found and accepted NE and SE corners of said section 11. Set 1/2" x 18" iron pipe with plastic cap stamped "RLS 41002" and established the witnesses as shown on the front of this certificate.