



A000608751

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/12/2015 9:54:26 AM

AS DOC #: A000608751

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep TX#: 120394

Twp 139 Rge 27 Index No. E.0-21.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 11, Township 139 N., Range 27 W., 5th P.M.
State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 09-16-2014 found _____ a 60d Spike with a washer, flush with the ground.

left monument as found lowered monument removed monument (explain)

On _____ placed _____

SKETCH OF REFERENCE TIES (NOT TO SCALE)

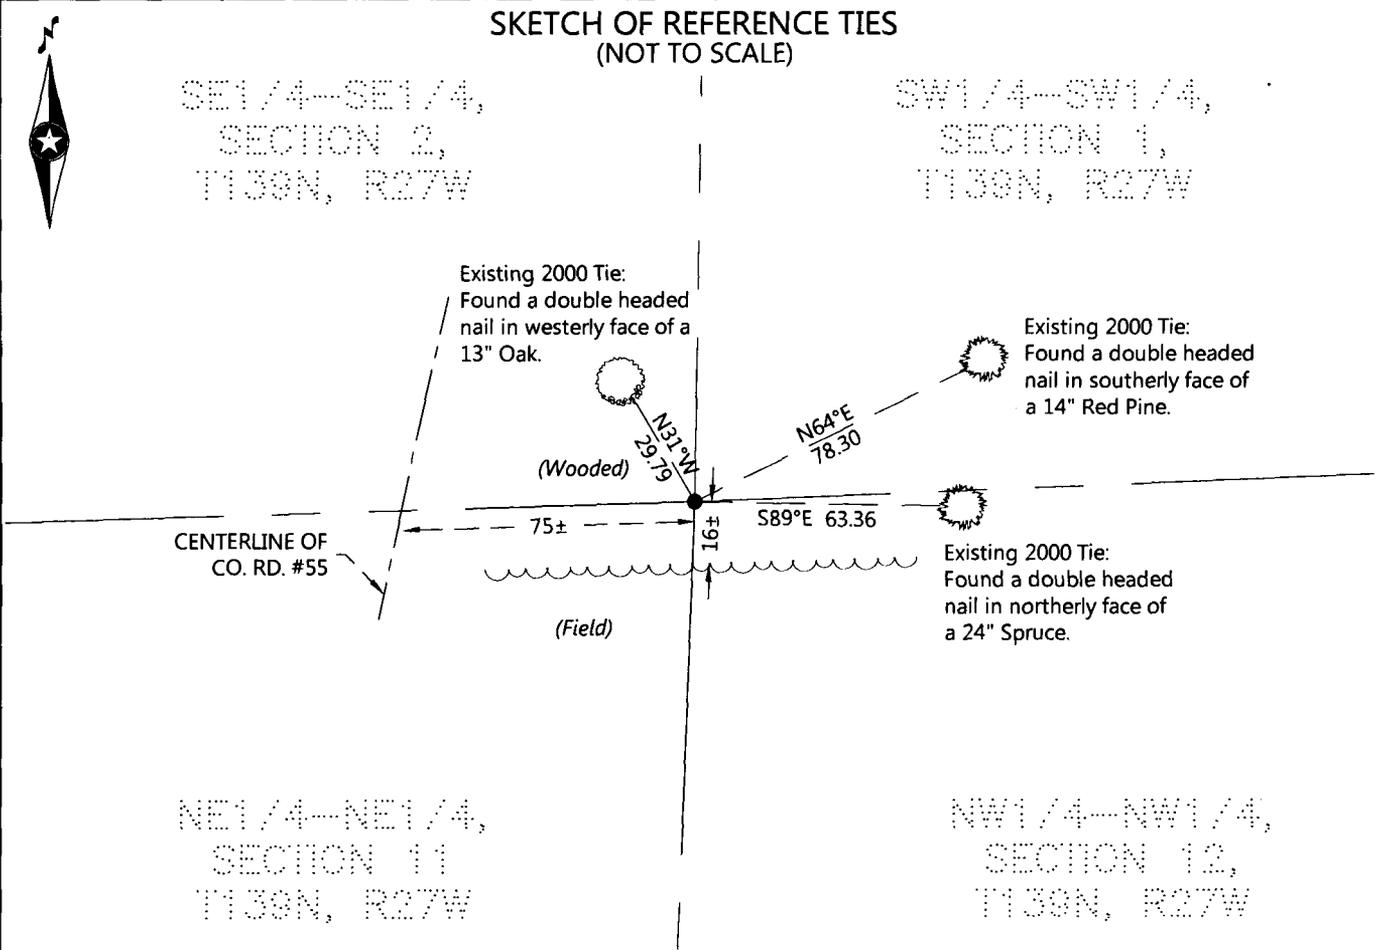

NOTE: All bearings are true.

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed land Surveyor under the laws of the State of Minnesota. I further certify that this united States public land survey monument record is correct and complete to the best of my knowledge and belief.

Joshua M. Dickerson, Land Surveyor
Date 1/9/15 MN License No. 47544

Index No. E.0-21.0 **STATEMENT ON EVIDENCE****Northeast Corner of Section 11, Township 139 North, Range 27 West of the 5th Principal Meridian.**

In 1864, Johnson and Thornton, U.S. Deputy Surveyors, set a wood post to mark the corner location while marking subdivision lines of the township and established bearing trees as follows: a 8" Birch S 15° W 31 links; a 6" White Pine S 45° E 18 links; a 6" Birch N 10° W 27 links; a 8" White Pine N 60° E 38 links;

Record on file with the Minnesota Historical Society in St. Paul, MN and copies filed with the Cass County Highway Department, Surveyors Office (CCHD/SO).

In 1913, Harry Todd, Deputy Cass County Surveyor, in County Survey Record Book "A", pages 576-580, also in Curo Book #173, Pages 53-75, shows that he found the original SE BT and stump of the SW BT. He set a 3"x3"x36"stake for the corner and marked new trees: 12" Birch N 50-04 W 38.90'; 10" White Pine N 52 E 66.25'; 10" White Pine S 61-12 W 53.25' and 14" White Pine S 12 E 45.00'.

Information on file in the CCHD/SO.

In 1922, John Greene, Deputy Cass County Surveyor, in County Survey Record Book "D", page 195, shows that he started south from corner.

In 1936, Civilian Conservation Corps, Washburn Lake Book #7, Page 5, shows a 2" stake set for the approximate corner 79 chains north of the SE corner of Section 11. B.P. S 45° E 30 links, B.P. S 45° W 25 links.

Information on file in the CCHD/SO.

In 2000, on Feb. 29, a CCSO crew searched for the corner. Finding no old evidence, they computed an obliterated position for the corner using the 1913 Todd survey between the NE corner of Section 2 and the NE corner of Section 14. They set a 60d spike with a washer approximately 16 feet north of open field and marked new ties: 8" White Oak N 45° W 29.79'; 11" Red Pine N 64° E 78.30'; 15" Spruce S 89° E 63.36'.

Information on file in the CCHD/SO in file 1998.002.

On September 16, 2014, a Northern Engineering & Consulting survey crew searched for corner and found the 60d spike with washer set in 2000, at the obliterated position between the NE corner of Section 2 and the NE corner of Section 14. They also found the (3) 2000 ties as shown on the front of this certificate. The monument found is accepted as marking the obliterated position of the original corner.

County Coordinates (Cass County North)

Northing 126126.61
Easting 541604.60