

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


E1/4 Corner of Section 16, Township 136N, Range 32W, 5th p.m., State of Minnesota, County of Cass

At the corner location shown on the sketch:

On _____ found a _____
Date

left monument as found lowered monument removed monument (explain)
On 31 OCT. 2014 placed a 3/8" DIA. REROD WITH RLS CAP NO. 17774, DOWN 0.15'
Date

SKETCH OF REFERENCE TIES

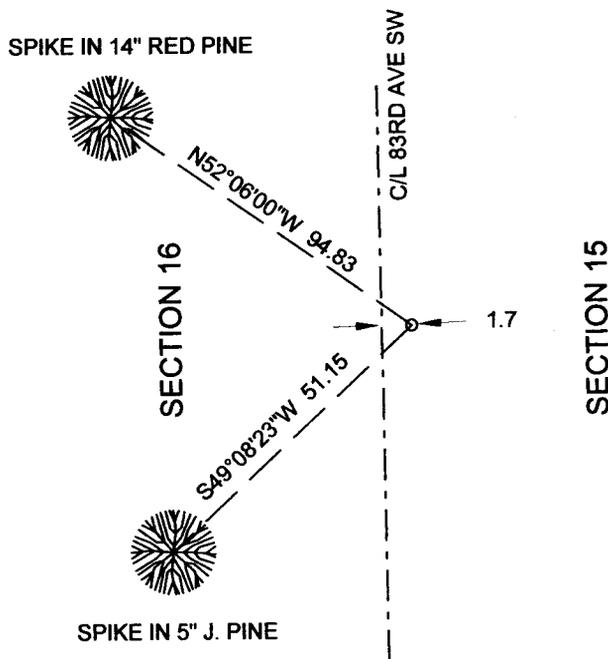


Tie Distances are measured to the spikes.

Cass County Coordinate System (South Zone)
N= 259653.49 E= 436836.92

○ Set Re-Rod with RLS cap No. 17774

● Found Pipe



NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R. Kohout 8 JAN 2015
Marvin R. Kohout Date

License No. 17774

Land surveyor

OFFICE OF COUNTY RECORDER



A000608869

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/15/2015 11:15:45 AM

AS DOC #: A000608869

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep TX#: 120485



INDEX NO. L.0-13.0

STATEMENT OF EVIDENCE

EAST QUARTER CORNER OF SECTION 16, TOWNSHIP 136N, RANGE 32W, 5TH P.M.

- 1866 OSCAR E. GARRISON, DEPUTY GOVERNMENT SURVEYOR, SET A POST TO MARK THE CORNER LOCATION. REFERENCES:
14" YELLOW PINE N73E 51.48 FT
12" YELLOW PINE N22W 45.54 FT
RECORDS ON FILE AT THE MN HISTORICAL SOCIETY, ST. PAUL AND COPIES FILED WITH THE CASS COUNTY HIGHWAY DEPT/SURVEYOR'S OFFICE (CCHD/SO)

- 1918 E. B.HORST, LS 376, FINDS THE CORNER STAKE SET BY W.H. POORE USING THE ORIGINAL GOVT BT'S. HORST REPLACES POST WITH A 2"X48" IRON MONUMENT. REFERENCES: 7" JACK PINE N 74-45 W 62 FT 6" N. PINE N 88-15 E 57 FT CURO BK.65, PG 151; COUNTY BOOK C, PG 107; SURVEY RECORD NO. 398 INFORMATION ON FILE IN CCHD/SO

- 2014 MARVIN R. KOHOUT, LS 17774, KOHOUT LAND SURVEYING, SEARCHED FOR BUT DID NOT FIND THE 1916 MONUMENT. PLACED A 3/8" REROD WITH RLS CAP 17774 MIDWAY BETWEEN AND ON LINE WITH THE NE AND SE CORNERS OF SECTION 16 TO MARK THE LOST POSITION OF THE E1/4 CORNER. REFERENCES AS SHOWN ON PAGE 1 OF THIS DOCUMENT.