



A000610419

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

3/26/2015 10:42:16 AM

AS DOC #: A000610419

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep TX#: 121714

Page 1 of 2 A000610419

Twp 138 Rge 32 Index No. A.0-03.0

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter corner of Section 6, Township 138 N., Range 32 W., 5th P.M.  
State of Minnesota, County of Cass.


At the corner location shown on the sketch:

On 30 Sep 2013 found a 3/4 inch iron rod.

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed \_\_\_\_\_

SKETCH OF REFERENCE TIES  
NOT TO SCALE

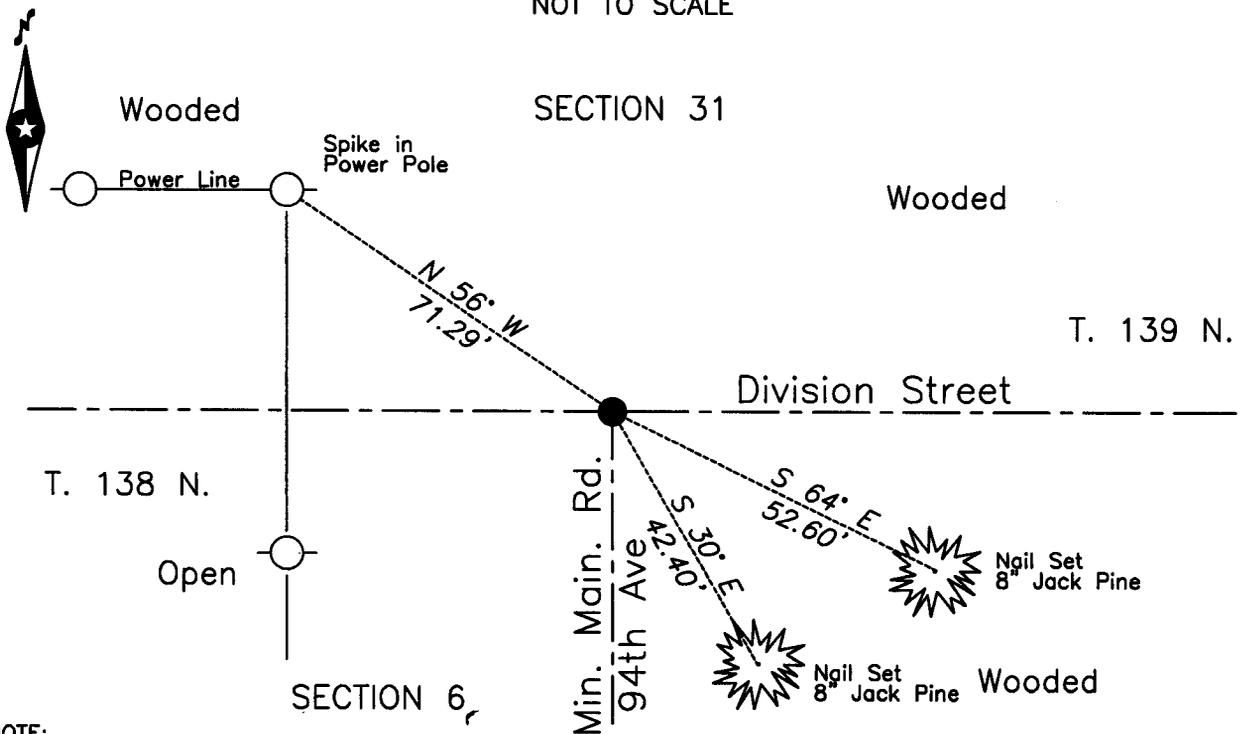

NOTE:  
Datum is MN State Plane, North Zone.

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.  
I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

Robert L. Kovanen

Date 3/15/15 MN License No. 16459



**Index No. A.0-03.0**

Statement of Evidence

**North Quarter corner of Section 6, Township 138 North, Range 32 West, 5th Principal Meridian.**

Oct. 1860 J.Myers, General Land Office (GLO) Deputy Surveyor set a post for the original corner in the survey of the township line and referenced it as follows:  
5" Blk Pine N 82° W 211 links (139.26 feet) 4" Blk Pine S 72° W 219 links (144.54 feet)  
Said record and the original plat are on file at the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Highway Department/Surveyor's Office and Hubbard County.

1898 Berg, Hubbard County Surveyor, Survey Record Book AA, page 58, on file with Hubbard County, indicates two new witnesses and distances, east 2626.80 feet to the Northeast corner of Section 6 and west 2706.00 feet to the township corner.  
8" B. Pine N 9° W 198.66 feet 7" B. Pine S 47° W 79.86 feet

April 1 1908 J.W.Curo, LS 1428, County Surveyor, Survey Record Number 182, Book A, page 421, on file with Cass County Highway Department/Surveyor's Office, states "I find two Jack pine trees, 6 inches thick, well scribed, but they were not made by the Gov't surveyors, as the marks appear to have been made only a few years ago, and the iron marks were made by a larger marking iron than those used by the Gov't surveyors as the marks and rings here are much larger than the figures on the old Gov't B.T.'s at the N.W. cor. of this Twp. As Mr. Ben Van De Bogart says these trees at the ¼ were marked by the Hubbard Co. Surveyor we pass them up and go ½ mile West....run East....@ 2715.90 set hub for temporary ¼ cor. on N. side of Sec. 6. All old corner marks are gone and we continue....East....". Page 422 states "....correct the North line of Sec. 6....., hub 2715.9 goes N 43°57'E 8.89 ft. where we drive a solid hub for the true ¼ corner and mark up two small bearing trees....Beginning at the ¼ corner on the South side of Sec. 6, 138-32, I run a transit line a mile north to the ¼ corner on the North side and set a line of hubs and stakes to mark road centre....From June 21<sup>st</sup> to June 25<sup>th</sup>, 1912 we pull up the wood stakes and put 8 x 8 x 36 inch cement posts at section and ¼ corners in Twp. 138, Rge. 32, at the following places:....the ¼ cor. On the N. side Sec. 6". No witnesses are listed.

Aug. 1987 Hubbard County Survey Crew, R. Thorpe and M. Branham, notes on file with Hubbard County, searched at the 1898 distance and at the P.I. of the road, no evidence was recovered.

Sep. 2013 Northwestern Surveying and Engineering, Inc. (NWSE) crew of Gay and Tagge recovered, located and witnessed a ¾ inch iron rod in the centerline of Division Street. The monument, together with the recovered and established references for the position is shown on the face of this document.

**Analysis of the recovered record data, field evidence and survey measurements, indicates that the position recovered in 2013 by NWSE is the accepted location of this corner.**