



A000616085

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

10/7/2015 11:11:20 AM

AS DOC #: A000616085

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep TX#: 126264

Page 1 of 2 A000616085

Index No. E.0-23.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 12, Township 140, Range 29, 5TH P.M.


STATE OF MINNESOTA, County of CASS

At the location shown on the sketch:

On 6-22-15 found 2 1/4" IRON PIPE IN PLACE.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed an _____
DATE

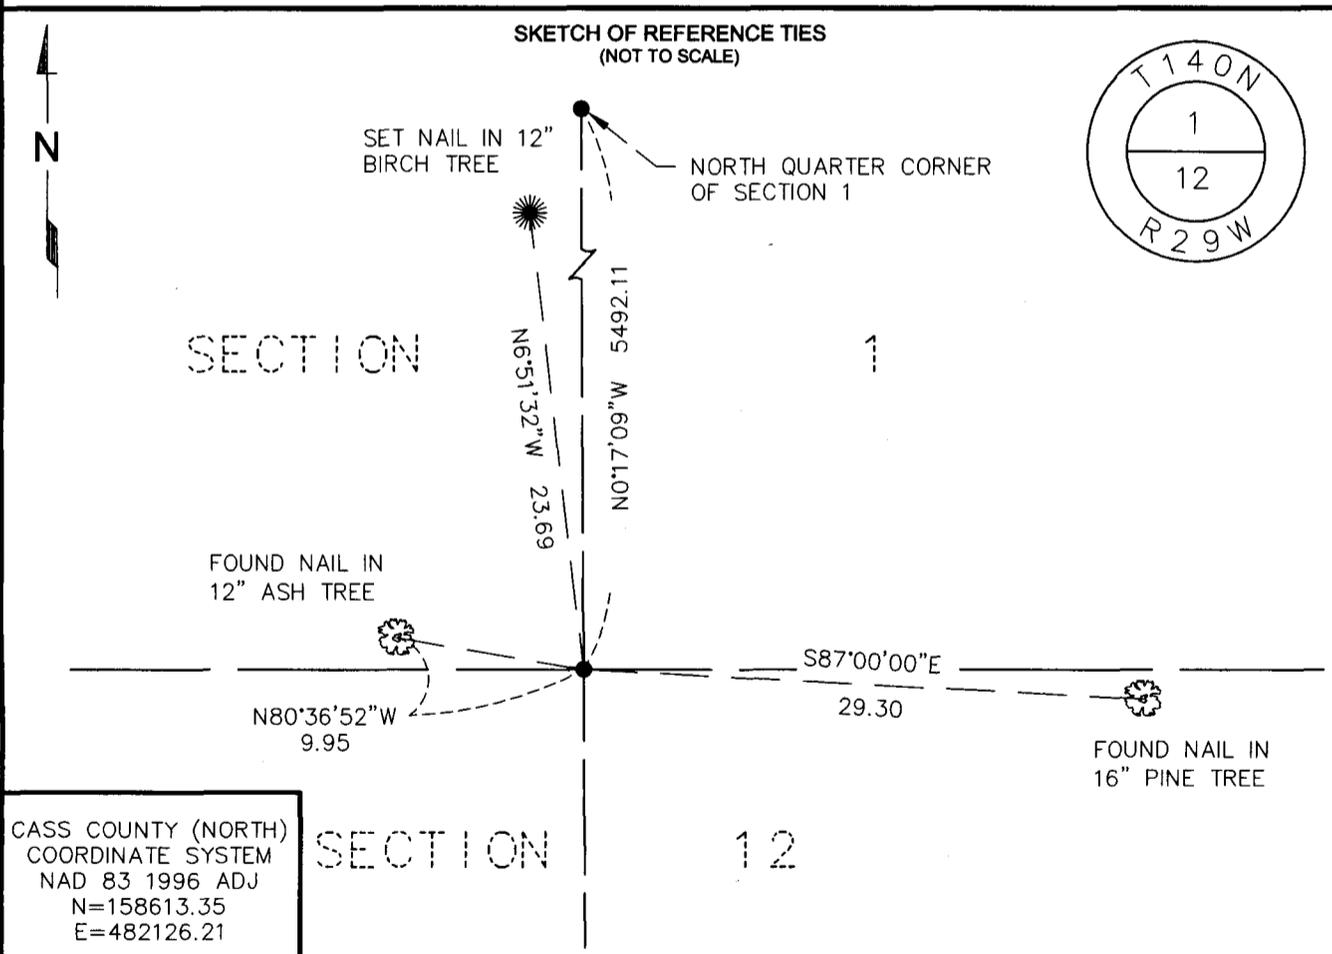

CASS COUNTY (NORTH)
COORDINATE SYSTEM
NAD 83 1996 ADJ
N=158613.35
E=482126.21

Statement of evidence relative to this corner is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Richard D Schlieman

Date 6-23-15 Registration No. 47591

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at .M. _____ on the _____ day of _____ A.D., 20 _____

County Recorder
By _____, Deputy

DOCUMENT NO. _____



Index No. E.0-23.0

STATEMENT OF EVIDENCE:

- 1870 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 12" Fir S 45 E 15 links and 8" N 25 E 15 links. Records on file with the Minnesota Historical Society in St. Paul and copies at the Cass County Highway Department Surveyor's Office.

- 2007 Landecker & Associates found an iron monument in place and accepted its position reflected on their certificate of survey file number 062178 on file in the Cass County Highway Department Surveyor's Office.

- 2015 Widseth Smith Nolting (WSN) was contracted by the Minnesota Department of Natural Resources to conduct a boundary survey in Section 1, T.140N., R.29W., Cass County, Minnesota. In order to complete the survey it was necessary to recover this corner. A WSN survey crew searched the area and recovered the pipe shown on the 2007 Landecker & Associates certificate of survey and was accepted as the corner. New reference ties were established to witness its location.