



A000621768  
 OFFICE OF THE COUNTY RECORDER  
 CASS COUNTY, MINNESOTA  
 CERTIFIED, FILED, AND/OR  
 RECORDED ON  
 6/2/2016 10:33:43 AM  
 AS DOC #: A000621768  
 PAGES: 2  
 REC FEES: 0.00  
 KATHRYN M. NORBY  
 CASS COUNTY RECORDER  
 BY SR Dep TX#: 130918

## CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*Patrick A. Trottier*

Patrick A. Trottier

Date: May 26, 2016 License No: 41002  
 PLS# 41002

North Quarter Corner of Section 6, Township 139 N, Range 28 W, 5<sup>th</sup> P.M.


- On 2-27-2016 found a railroad spike, flush in asphalt, 4' south of centerline of County Road 47 NE
- left monument as found,       lowered monument,       removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_

### SKETCH OF REFERENCE TIES

Not to Scale

Corner Index:

A.0-3.0

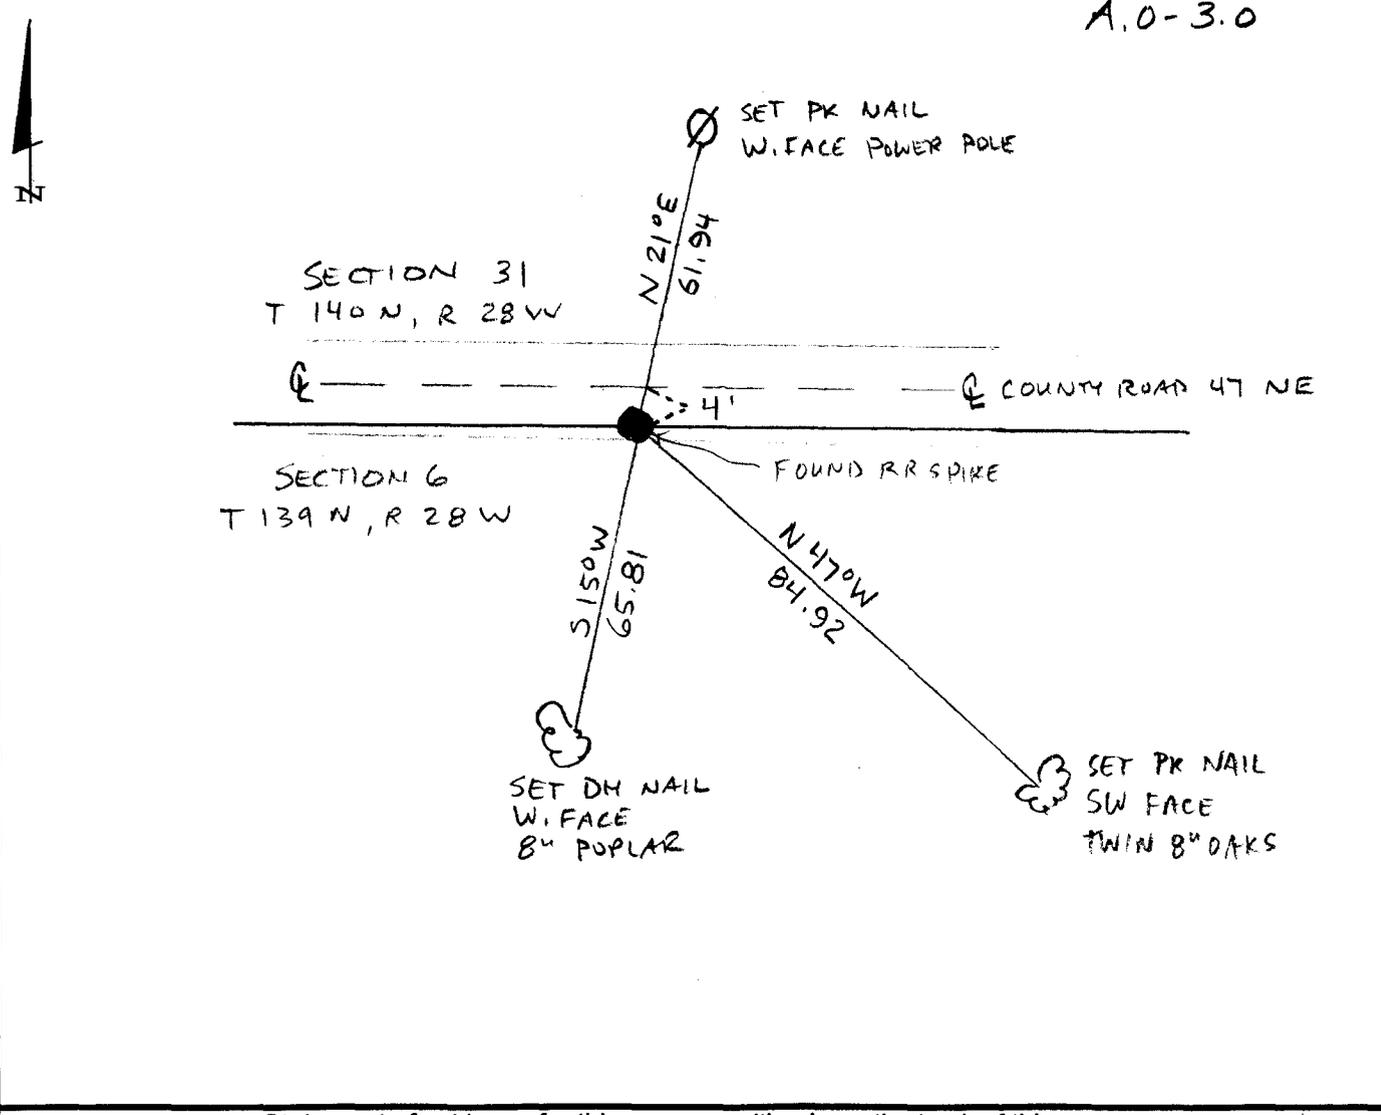



**A.0-3.0**

**Statement of Evidence**

**North Quarter corner, Section 6, Township 139 North, Range 28  
West, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota**

1863 – Johnson and Thornton, US Deputy Surveyors established this corner. A wood post was set from which the following witnesses were established:

- 7” Linn            S 37° E            19 links
- 5” W. Maple    N 35° W            12 links

Information on file in the MN Historical Society, St. Paul, MN. Copies on file in the Cass County Highway Department/Surveyors Office (CCHD/SO).

1905 – Road Calendar A, page 56 and B, page 40 by John Curo. Information on file in the CCHD/SO.

1919 – Ben Clark, County Book C, page 334, Survey Record No. 434 set 2 1/2" x 36" iron pipe and established the following witnesses:

- 10” Poplar      North            44 feet
- 8" Poplar       S 17° W           50.7 feet

Information on file in the CCHD/SO.

1922 – Ben Clark, County Resurvey E-9, shows iron monument. Information on file in the Cass County Recorders Office.

1939 – CCC in Washburn Lake, Book 12, page 39, set approximate corner set at 2640 feet from east.

1942 – John Curo, in Survey Book D, page 325 found iron monument and both 1919 ties. Information on file in the CCHD/SO.

1946 – John Curo, in Curo Book 33A, page 24 shows distances along north line of Section 6. Information on file in the CCHD/SO.

2013 – Terry L. Freeman, PLS 21367, shows found monument in Certificate of Survey dated 04-16-2013.

2015 – Patrick Trottier, PLS 41002, found a railroad spike and found it to properly fit other monuments shown on 2013 Freeman survey. Accepted monument as corner and witnesses are shown on the face of this survey.

County Coordinates (Cass County North)