



A000643888

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

9/6/2018 10:49:30 AM

AS DOC #: A000643888

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY NG Dep TX#: 148823

Page 1 of 2
A000643888

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trottier

PATRICK A. TROTTIER

Date: 8-30-2018 License No: 41002
41002

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ M. on the _____ day of _____, 20____ A.D.

County Recorder _____

By: _____, Deputy
DOCUMENT NO. _____

NORTHEAST Corner of Section 32, Township 139, Range 26, 5th P.M.

On 5/8/2018 found a 2" IRON PIPE


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES

Corner Index: V.0-9.0

Not to Scale

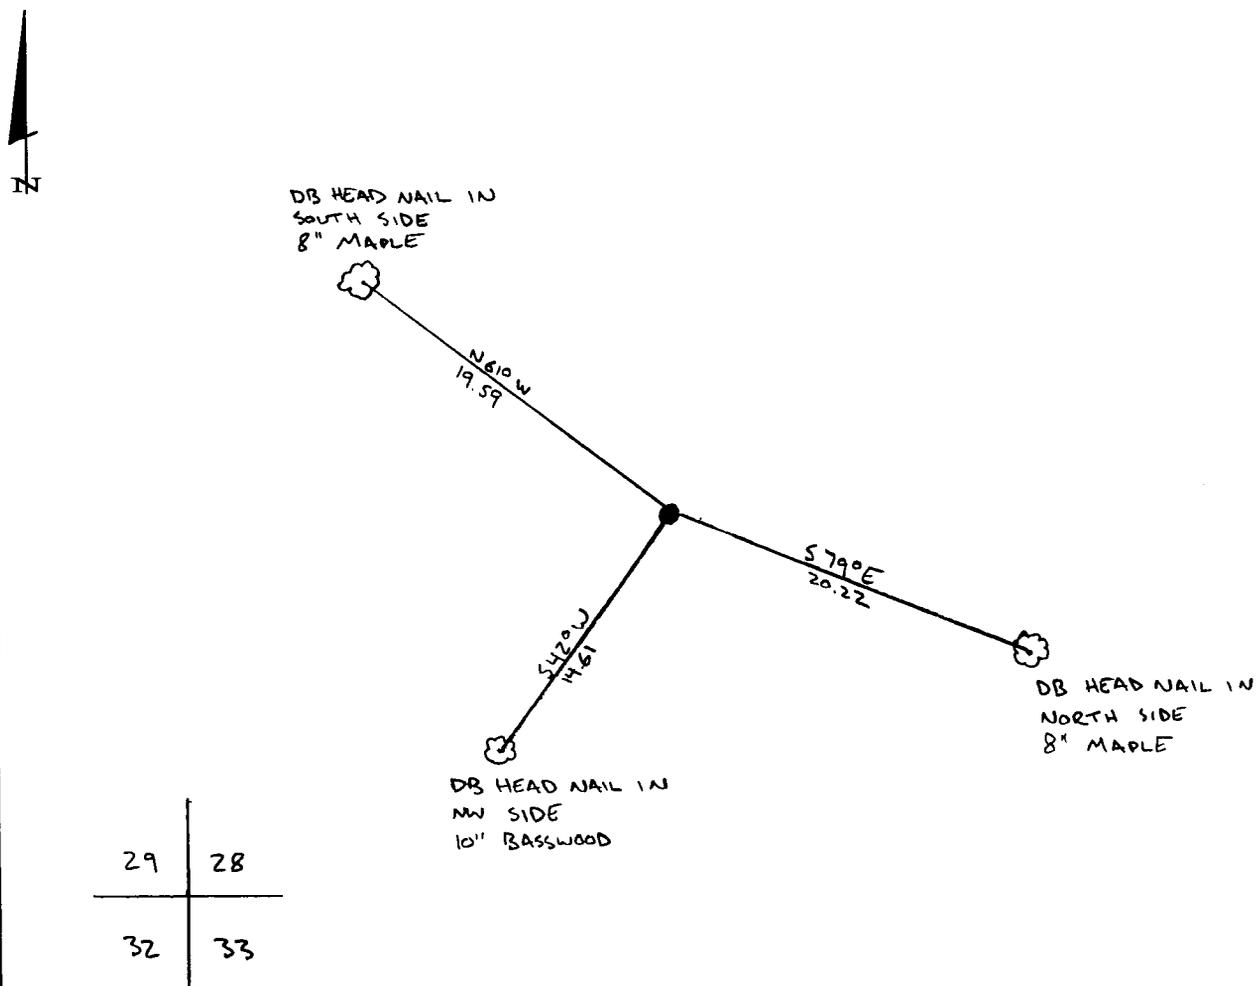

Statement of evidence for this corner position is on the back of this page



V.0-9.0

Statement of Evidence

**Northeast corner, Section 32, Township 139 North, Range 26
West, 5th Principal Meridian, Cass County, Minnesota**

1863 – Johnson and Thornton, US Deputy Surveyors originally established this corner position while surveying the interior subdivision lines of Township 139 North, Range 26 West. A wood post was set to mark the corner position with the following witnesses:

- 18” W. Pine N 53° E 58 links
- 14” B. Oak S 68° E 55 links
- 10” Lynn S 37° W 58 links
- 20” W. Pine N 46° W 50 links

Information on file in the MN Historical Society, St. Paul, MN. Copies on file in the Cass County Highway Department/Surveyors Office (CCHD/SO).

1916 – John Curo, County Book B, P186-190, found wood post and old Government bearing tree stumps. Set a 3x3x48” oak post, returned later and set a 2x48” iron boiler tube with the following witnesses:

- 6” W. Oak N 17°40’ W 32.30 feet
- 7” Poplar S 47°20’ W 36.40 feet
- 4” W. Oak S 64°30’ E 82.80 feet

Information on file in the (CCHD/SO).

1936 – CCC, Washburn Lake Book 3, P33, at 40 chains from East, found iron pipe.
Copies on file in the Washburn Lake Forestry Station.

1938 – CCC, Washburn Lake Book 9, found iron pipe at corner.
Copies on file in the Washburn Lake Forestry Station.

1986– Wallace Buckler, LS 9672, map shows monument in place.

2018 – A Stonemark survey crew found a 2 inch iron pipe 1 foot above ground, and is witnessed with the ties shown on the front of this certificate. Patrick Trottier PLS #41002, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

County Coordinates (Cass County North NAD83/96)

Northing 105326.850

Easting 557343.500