



A000660527

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

6/19/2020 10:28:26 AM

AS DOC #: A000660527

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SF Dep TX#: 162433

Index No. V.0-7.0

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 32, Township 135, Range 32, 5TH P.M.

STATE OF MINNESOTA, County of CASS

At the location shown on the sketch:


On 4/2/2020 found 1/2 INCH PIPE WITH CAP # 13620

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed an \_\_\_\_\_

SKETCH OF REFERENCE TIES (NOT TO SCALE)

ACCESSORY BEARING BASIS: BEARING

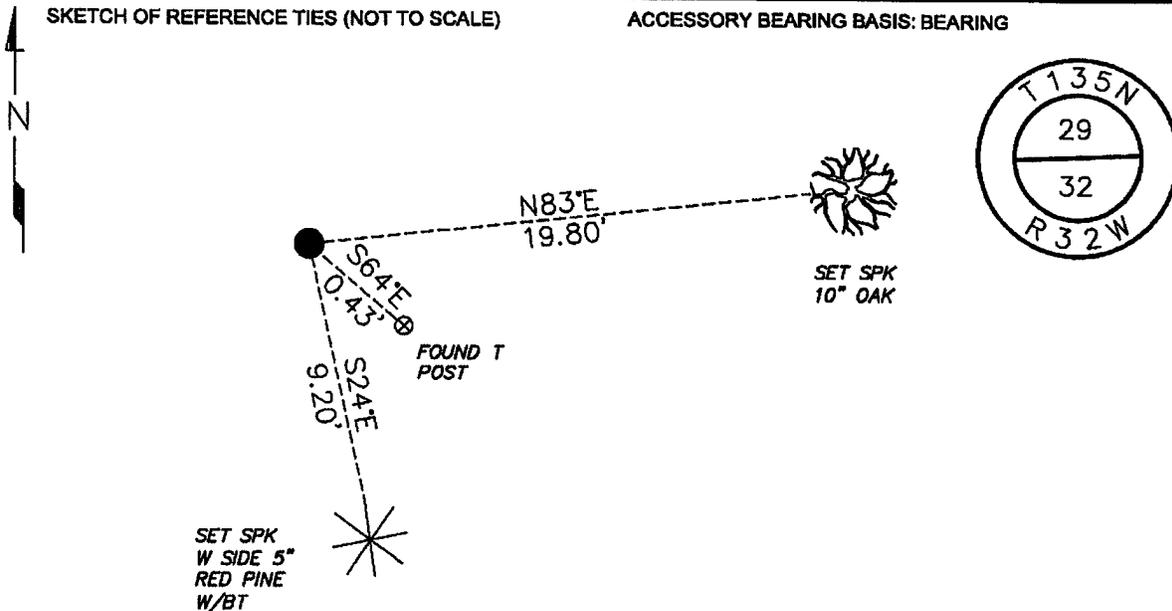

I hereby certify that this document was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota

Paul Herkenhoff  
PAUL HERKENHOFF

Date 4/13/2020 License No. 45875

N= 214515.75 E= 428956.13

DATUM= CASS COUNTY SOUTH

NAD 83/96 ADJ.

US SURVEY FT.

Statement of evidence relative to this corner is on back of page.





**Index No. V.0-7.0**

**Statement of Evidence:**

**North Quarter Corner of Section 32, Township 135, Range 32 West, 5th Principle Meridian, Cass County, Minnesota**

1866 Oscar E. Garrison, General Land Office (GLO) Deputy Surveyers set a post for the original corner in the subdivision and noted the following accessories.

14" Black Pine	N31W	21 links
24" Black Pine	S53W	27 links

Record on file with the Minnesota Historical Society in St. Paul, MN and copies filed with the Cass County Highway Department, Surveyors Office (CCHD/SO).

2010 David A. Anderson PLS did an extensive survey in Section 28, Township 135, Range 32. Anderson Set a 1 inch pipe with cap at this corner. The Anderson survey and section information was submitted for review of the Cass County Surveyor back in 2010 and is on file in the office of Cass County Highway Department.

2020 Lakes Area Surveying searched the area for all previous evidence. The 2010 monument was recovered. The 2010 survey agreed well with GLO distances and local land occupation. This location is accepted as being the best available evidence for this corner.

**Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument found by Lakes Area Surveying in 2020 is the accepted location of this corner.**