



A000667768
 OFFICE OF THE COUNTY RECORDER
 CASS COUNTY, MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON
 12/29/2020 8:55:32 AM
 AS DOC #: A000667768
 PAGES: 2
 REC FEES: 0.00
 KATHRYN M. NORBY
 CASS COUNTY RECORDER
 BY SF Dep TX#: 167860

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trotter

Patrick A. Trotter

Date: 12.14.2020 License No: 41002
 PLS# 41002

East Quarter Corner of Section 26, Township 142 N, Range 26W, 5th P.M.
 On 11-04-2020 found a aluminum cap talspar, down 0E', 32' +/-
West of C.R. 52 and 9' +/- north of F.S. Road 3765 centerline
 left monument as found, lowered monument, removed monument (explain)
 On _____ placed a _____

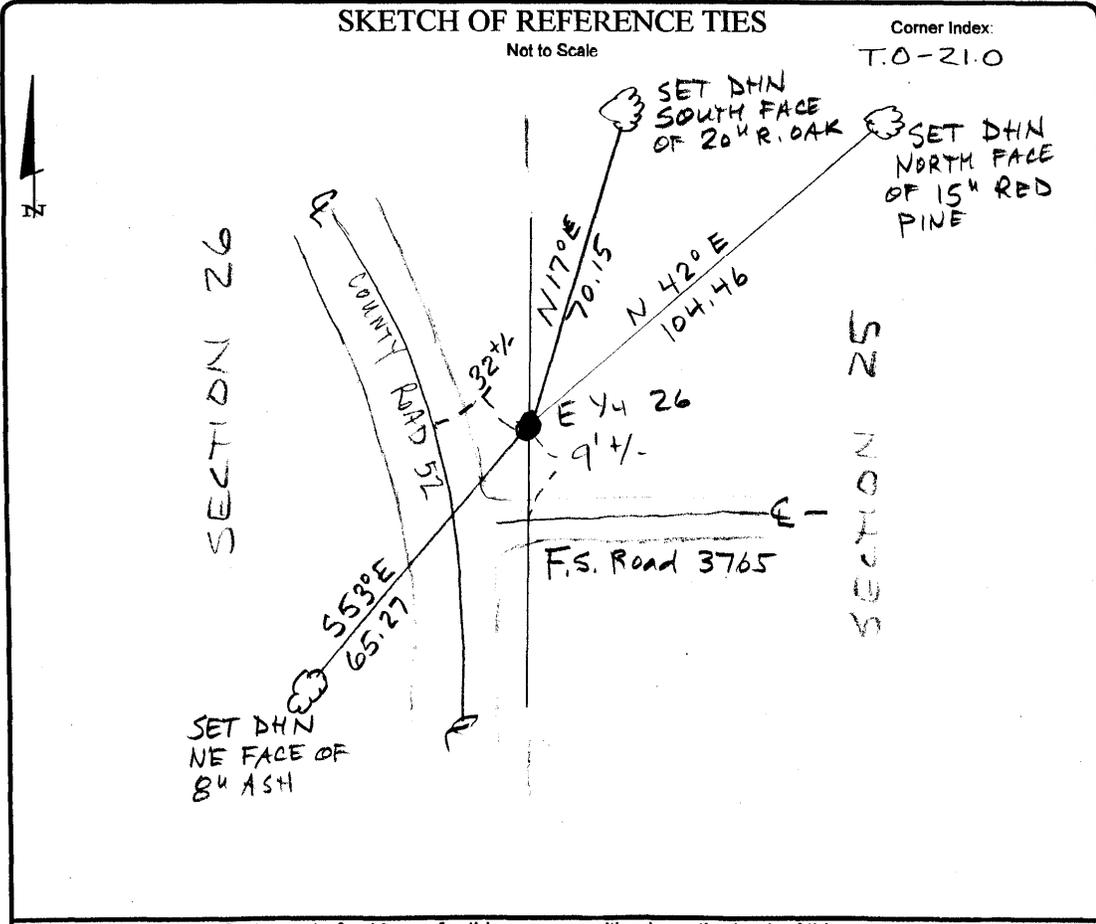

T.0-21.0**Statement of Evidence****East quarter corner, Section 26, Township 142 North, Range 26
West, 5th Principal Meridian, Cass County, Minnesota**

1872 – Hayward and Griffin, US Deputy Surveyors originally established this corner position while surveying the interior subdivision lines of Township 142 North, Range 26 West. A wood post was set to mark the corner position with the following witnesses:

6" Birch	S 40° E	42 links
12" Birch	N 6° W	37 links

Information on file in the MN Historical Society, St. Paul, MN. Copies on file in the Cass County Highway Department/Surveyors Office (CCHD/SO).

1912 – James Flynn, County Survey Book B, p. 514, finds original 12" Birch tie down, sets post at position. On p. 515, drawing indicates iron monument at corner. Information on file in the CCHD/SO.

1921 – James Flynn, County Survey Book C, p 415-417 as part of Survey Record 457, finds iron monument.

2000 – Cass County Surveyors Office determines corner to be destroyed by road construction and sets aluminum cap telspar at obliterated position lying 36' east of new centerline County Road 52 and 9' north of road to east.

Establishes the following witnesses:

9" W. Pine	N 88° W	116.60 feet
14" R. Oak	N 17° E	70.15 feet
4" Ash	S 53° E	65.27 feet
8" N. Pine	S 45° W	104.46 feet

2020 – Patrick Trottier finds aluminum cap telspar set in 2000 along with the NE and SE ties. Accepts monument as true corner, updates found witnesses and establishes new witnesses as shown on the face of this survey.

County Coordinates (Cass County North NAD83/96)

Northing 202881.81

Easting 572895.11