



A000673892

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

6/25/2021 10:25:45 AM

AS DOC #: A000673892

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY NG Dep TX#: 172922

Index No. N.0-5.0


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 19, Township 142 N, Range 25 W, 5th P.M.
County of Cass, State of Minnesota

At the corner location shown on the sketch :

- On _____ found _____
- left monument as found lowered monument removed monument (explain)
- On April 23, 2019 set Standard 48" long USFS pipe monument, stamped as
shown below, up 0.9'.

SKETCH OF REFERENCE TIES (NOT TO SCALE)

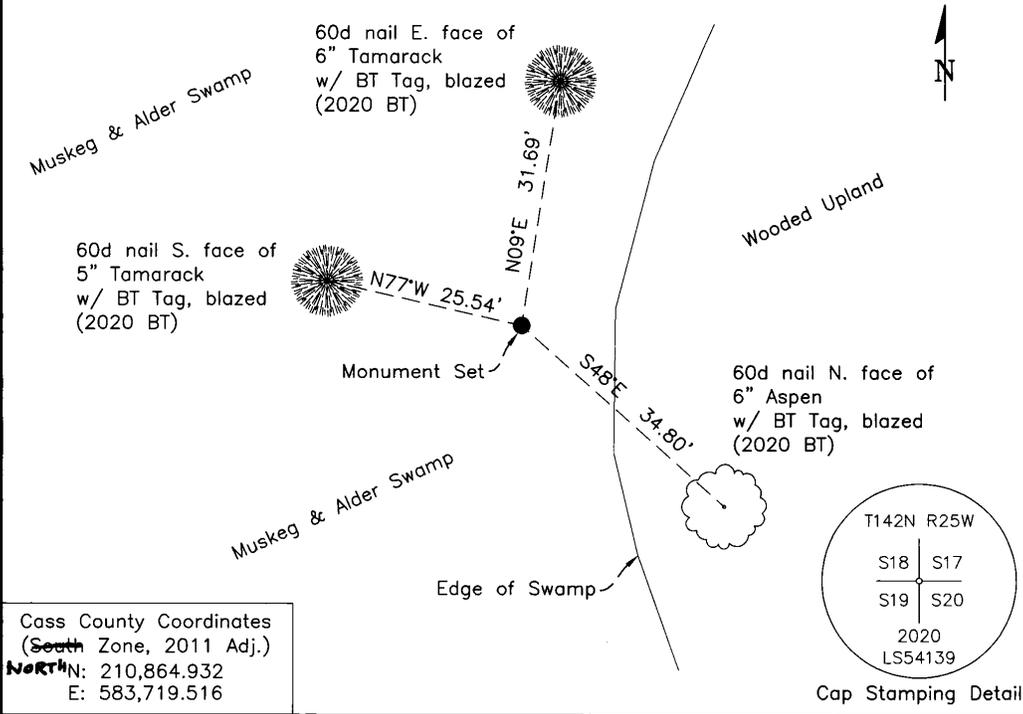

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the state of Minnesota.

AJ Skattum

Aaron J. Skattum
Cass County Surveyor
MN License No. 54139

6-23-2021
Date



Index No. N.0-5.0

STATEMENT OF EVIDENCE

North 1/4 Corner of Sec. 27, T.145N., R.31W., 5th P.M., Cass County, MN

1871 W.P. Allen & E.P. Putman, US General Land Office, originally established this corner while surveying the subdivision lines of this township, and set wood post to mark the corner position with the following witnesses:

5" Tamarack	N42°E	54 links (35.64')
4" Tamarack	S74°E	61 links (40.26')
4" Tamarack	S02°W	57 links (37.62')

Information on file at the MN Historical Society, St. Paul, MN. Copies filed with the Cass County Highway Department/Surveyors Office (CCHD/SO).

No subsequent corner recovery attempts or surveys involving this corner after the original GLO survey could be found.

2020 A. Skattum, US Forest Service, (Corner Book 2, page 29, USFS Records) found no evidence of a corner monument, or accessories. This corner position was reestablished using topographic feature calls to the edges of the swamp north, south, east and west per the GLO notes. The edges of the swamp were relatively well-defined and fit the topo calls fairly well when compared to a lost corner solution, which would have not matched any of the topo calls. Furthermore, there were no existing corners within a reasonable distance north and east of this corner from which to properly compute a lost position. The following ties were established:

6" Tamarack	N09°E	31.69'	New BT
5" Tamarack	N77°W	25.54'	New BT
6" Tamarack	S48°E	34.80'	New BT
Sign Post	North	1.2'	New sign set

The new monument measures N89°14'39"W 5,580.31' to the NW corner of Section 19 (computed position from witness corner), which is significantly longer than record distance, but is consistent with the excess length found in other east-west section lines closing on the westerly line of this township.

USFS records cited herein are on file at the Chippewa Nation Forest Supervisor's Office.