



A000683302

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

4/12/2022 12:16:50 PM

AS DOC #: A000683302

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY KF Dep TX#: 180547

Page 1 of 2 A000683302

Index No. K-21

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST 1/16 CORNER OF NE QUARTER of Section 14, Township 142, Range 29  
5th Principal Meridian, State of Minnesota, County of CASS

At the corner location shown on the sketch:

■ On 2/17/2021 found a NOTHING  
DATE

left monument as found,  lowered monument,  removed monument (explain)

■ On 2/17/2021 Placed a 3/4" X 6" REBAR WITH CAP STAMPED "MN DNR LS 48249"  
DATE  
WELDED TO A 5.5' STEEL FENCE POST, UP 1.0', IN OPEN BOG.

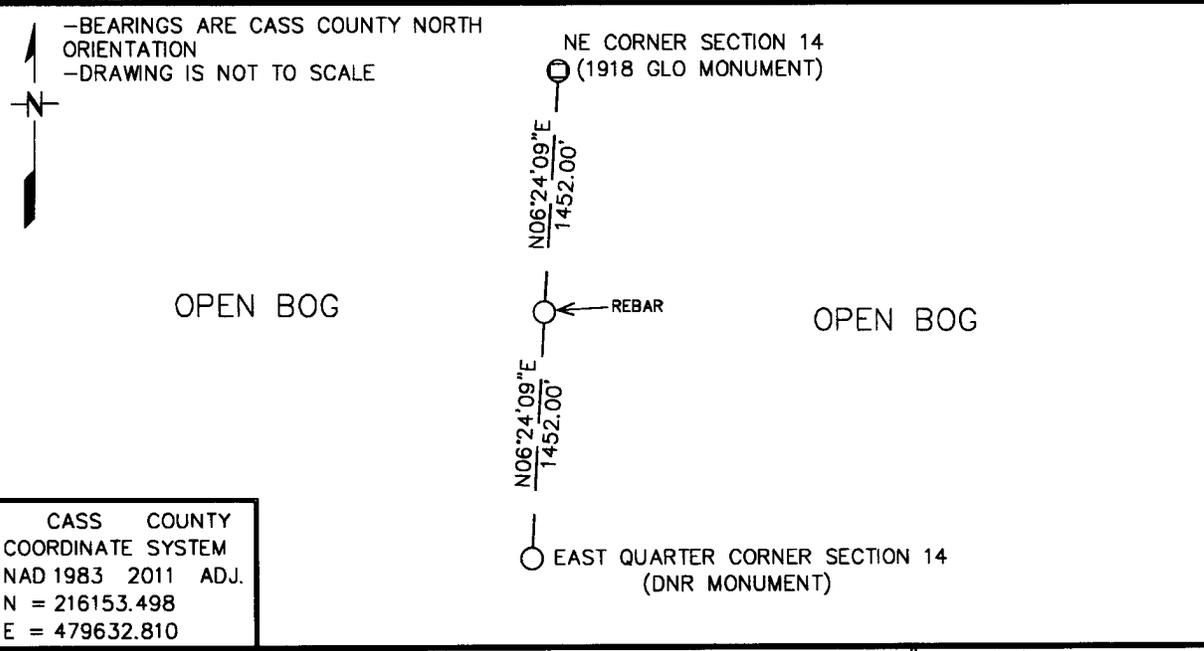

Statement of evidence for this corner location is on back of this page.

AMD 6/16/2021  
AMA00296.00.00.01

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

SIGNATURE Daniel A. Drusch DATE 2-16-2022 License Number 48249  
DANIEL A. DRUSCH

Title:  Land Surveyor  Professional Engineer  County Surveyor  County Engineer



**East 1/16<sup>th</sup> Corner, Northeast Quarter Section 14, Township 142 North, Range 29 West, 5<sup>th</sup> P.M.**

The DNR Land Survey Unit contacted the following offices for survey information on this corner:

MN Secretary of State  
Cass County Recorder and Surveyor  
NECI Land Surveying

1918 The U.S. General Land Office (GLO) field notes, on file in the MN Secretary of State's Office, describe this corner as: Set a 1" X 36" iron post with a brass cap 28" in the ground. Dug a 36"x 36"x 24" Pit 4 links North of the corner.

1969 Air photos on file with the DNR show this corner to be in a large boggy area.

2021 February, the DNR Land Survey Unit conducted a search for this corner but did not find the monument set in 1918, nor was any other original evidence found. As a result, the corner was computed by Single Proportionate Measurement between the East Quarter Corner of Section 14 and the Northeast Corner of Section 14. A 5.5' foot 'T' steel fence post with a 3/4" rebar welded to the top and a RLS cap #48249 placed on top, was set in the bog to perpetuate the corner. This computed position was found to measure:

1452.00 feet (GLO = 1454.64 feet) to the Northeast corner section 14.

1452.00 feet (GLO = 1454.64 feet) to the East Quarter corner section 14.

Analysis of the available information led me to accept the computed position as the corner. Lack of government perpetuation bears out the need for the lost position.