

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST 1/16th Corner of Section 15&22, Township 141, Range 29, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 6/19/80 found a GLO brass cap monument in place as set in 1918.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

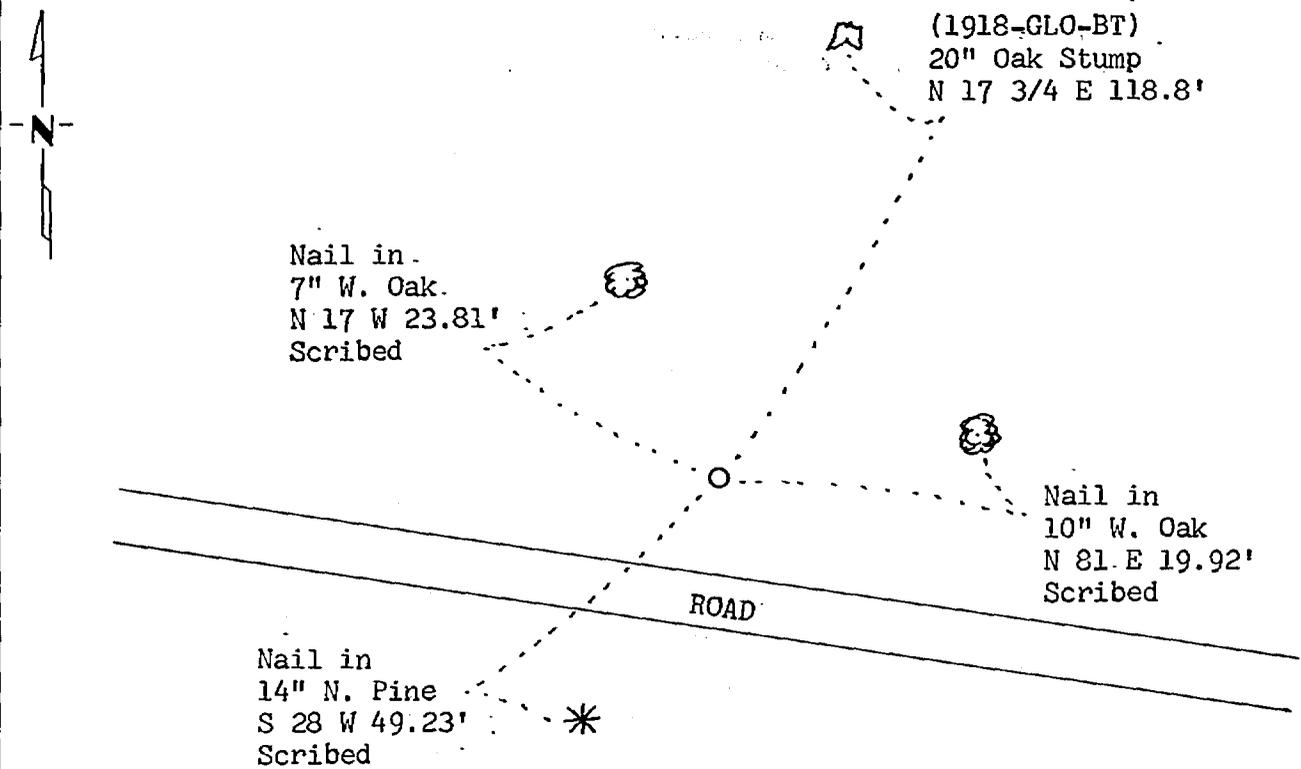

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page. 261008

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Nancy H. Stevenson 12-15-81
SIGNATURE DATE

Registration No. 12684

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:46 A.M. on the 31 day of Dec. A.D., 19 81

County Recorder Bulah Hendricks

By MS, Deputy

DOCUMENT NO. 261008

Statement of Evidence:

- 1918 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 14" Black Oak N 17-45 E 180 links and 16" Black Oak S 68-15 W 170 links.
- 1969 USFS technician L. Witthoeft found the brass cap monument in place and the one bearing tree: 18" B. Oak N 17-45 E 180 links.
- 1980 USFS technician William Olson again found the brass cap monument with the GLO bearing tree dead as follows: 20" R. Oak N 17 3/4° E 180 links. Three new bearing trees were marked and are shown on this certificate.
- 1981 On Dec. 8, I visited corner area and found items as per 1980 USFS report. GLO oak is now down with 4' high stump left. Old scar is evident.
- 1981 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.