

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


AP 1 TR 1703 Corner of Section 12, Township 141, Range 30, 5 P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 10-29-81 found a 1"x36" brass cap monument 18" below surface in state hwy. 200, push it down, set 2"x24" brass cap mon. on top
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____

SKETCH OF REFERENCE TIES

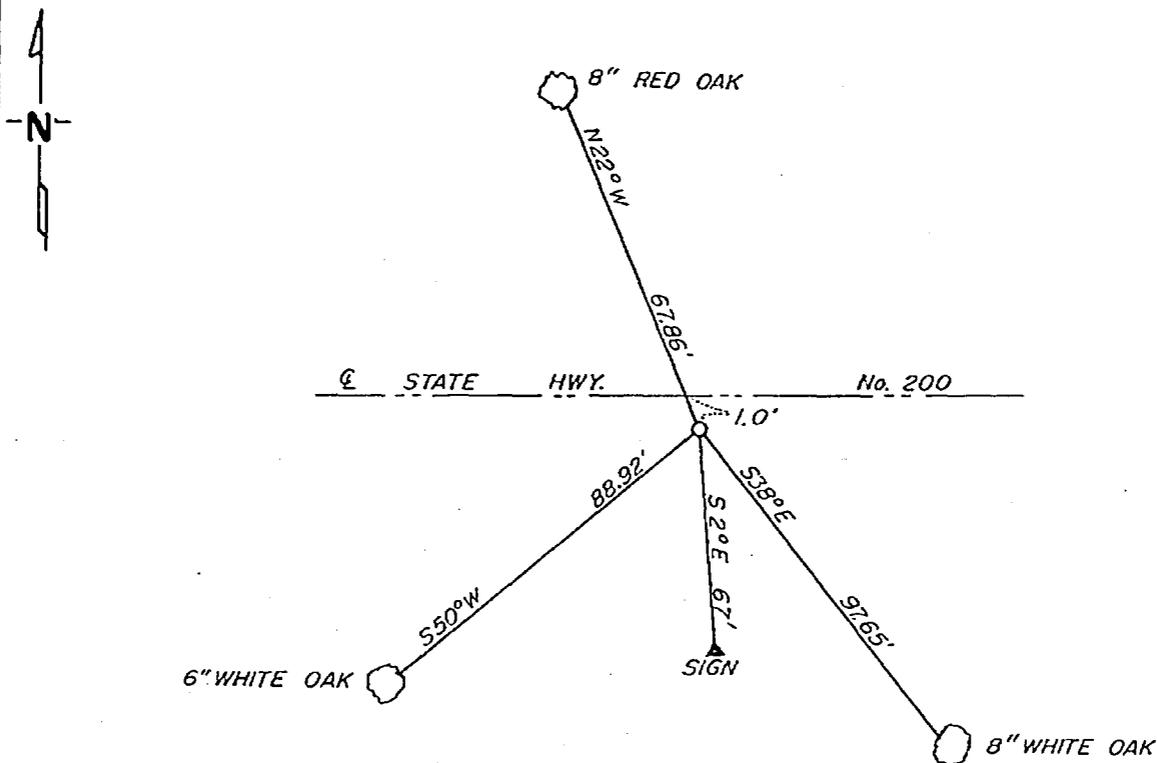

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Cress 12-8-81
SIGNATURE DATE

Registration No. 11395

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

262634
OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:00 P.M. on the 7 day of May A.D., 1982

Register of Deeds Doreah Herdiner
By MS, Deputy

DOCUMENT NO. 262634

In 1917, Earl G. Harrington, a US surveyor set a 1"x36" iron pipe with brass cap for AP 1 TR 1703 and AP 2 TR 1286.

In 1937 M.H.D. found this monument in place. In 1941 they found it again and made BT's as follows: Spike in 20" oak 5 E 96.3', a spike in a 20" oak SW 92.6 and a spike in 20" oak SW 93.7'.

On October 29, 1981, Walter Curo and Paul Johnson find the SE 22" oak with a spike in it and we find a 20" oak SW 93.7' and we find a 30" oak stump SW 92.6' from these ties. We dig and find a brass cap monument 20" under the surface, we push it down and set a 2"x24" iron pipe with brass cap on top 1½" under surface of the blacktop and make new BT's as shown on front.