

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 7, Township 143, Range 30, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On 2-23-1983 found a 1" iron pipe with brass cap
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

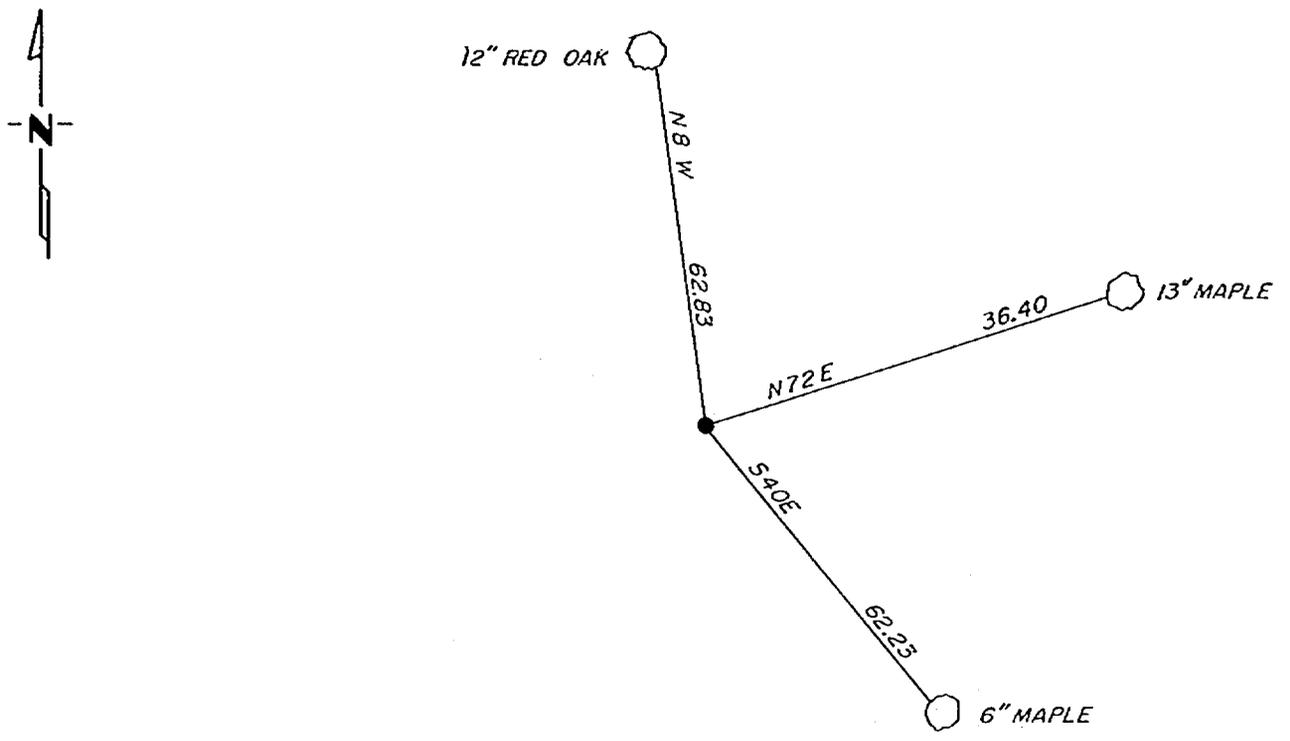

Statement of evidence relative to this corner location is on back of page 268844

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter C. Lee 3-18-83
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:05 P .M. on the 18 day of May A.D., 19 83

Register of Deeds Clouline Kayler
By MS, Deputy

DOCUMENT NO. 268844

Statement of Evidence:

In 1919, Earl Harrington, a US surveyor set a 1"x36" iron pipe with brass cap for the S 1/4 corner from the original bt's. He marked new bt's as follows, a 16" red oak N52 15 W 43 links and a 12" red oak S 27 E 69 links.

On 2-23-1983, Walter E. Curo, a registered land surveyor and Ken Metcalf found the 1" iron pipe with brass cap standing in good condition. We find no trace of original bt's. We mark new bt's as shown on the front.