

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


South Quarter _____ Corner of Section 4 _____, Township 139 _____, Range 29 _____, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 7/14/81 found a 2" iron pipe flush to ground centerline
old ^{DATE} grass road
- left monument as found, lowered monument, removed monument (explain)
- On 7/26/84 placed a 4" cast iron monument 0.40 feet below ground
_{DATE}

SKETCH OF REFERENCE TIES

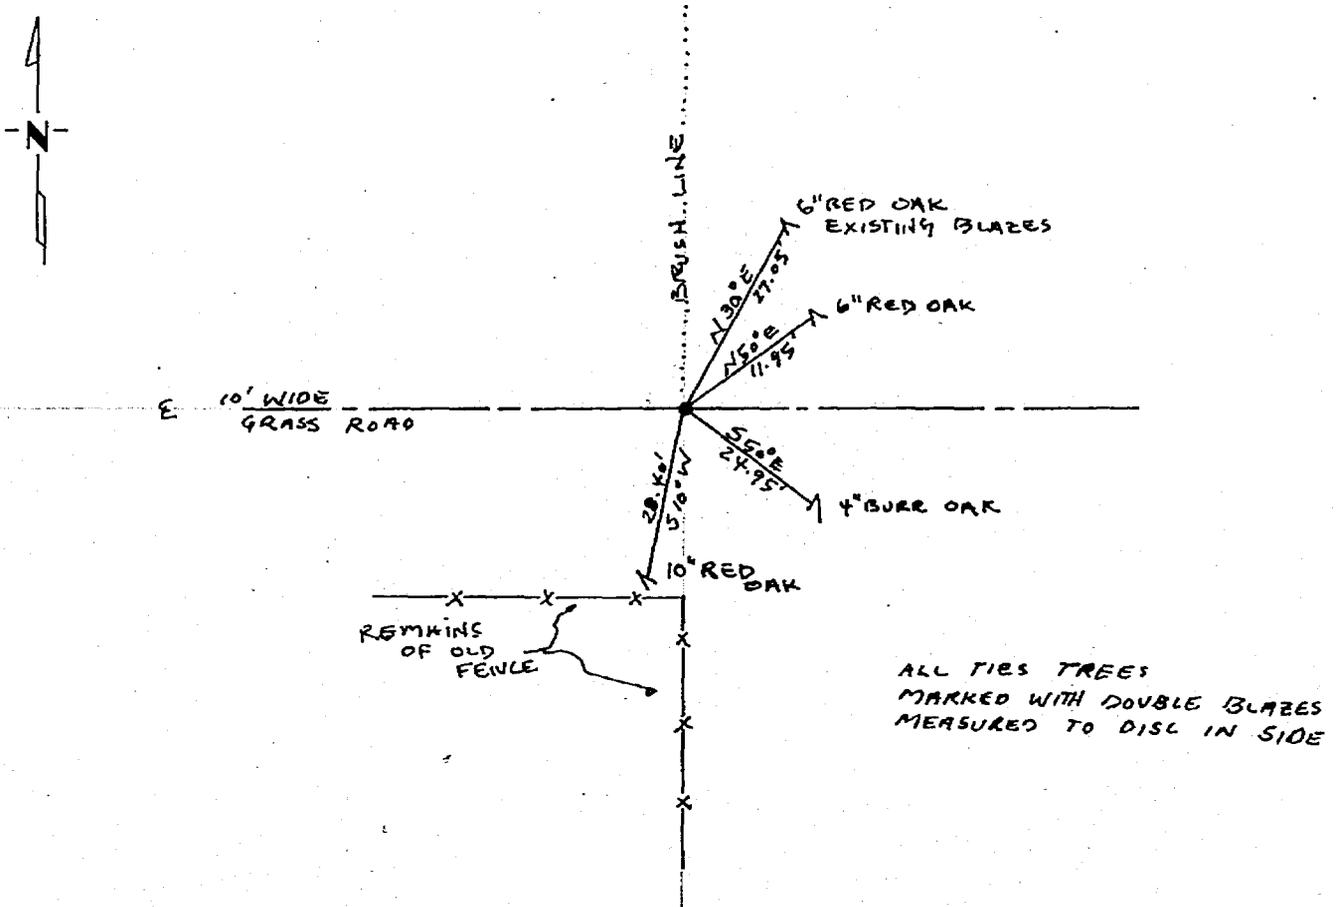

ALL TIES TREES MARKED WITH DOUBLE BLAZES MEASURED TO DISC IN SIDE

Statement of evidence relative to this corner location is on back of page.

276692

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Mary S. Sandberg 7/30/84
SIGNATURE DATE

Registration No. 7452

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:20 A.M. on the 31 day of July A.D., 1984

County Recorder Claudia Kaylar
By MS Deputy

DOCUMENT NO. 276692

Statement of Evidence:

Original Government Survey

Corner set in 1865 by Wright & Walker

In 1948 Harold Curo found 2" I.P.

In 1970 R.F. Schneider, Registered Surveyor #5740, found corner but used position 0.8 South and 6.3' East of pipe.

On 6/20/76 Myron Landecker, Registered Surveyor #7452, found 2" I.P. corner used in Curo survey.

On 7/14/81 Myron Landecker used same 2" I.P. corner in Section subdivision of Section 4, Township 139, Range 29.

In 1935 J. Curo set 2" iron pipe and tied out.

Myron Landecker believes this corner to be a perpetuation of the original Government corner as established in previous surveys.