

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Meander on West line
 Corner of Section 4, Township 139, Range 29, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 7/14/81 found a 2" iron pipe 0.40' above ground
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 7/27/84 placed a 36"x2"x2" square metal post with 2-3/4" aluminium cap stamped MC, 0.50 feet above ground
DATE

SKETCH OF REFERENCE TIES

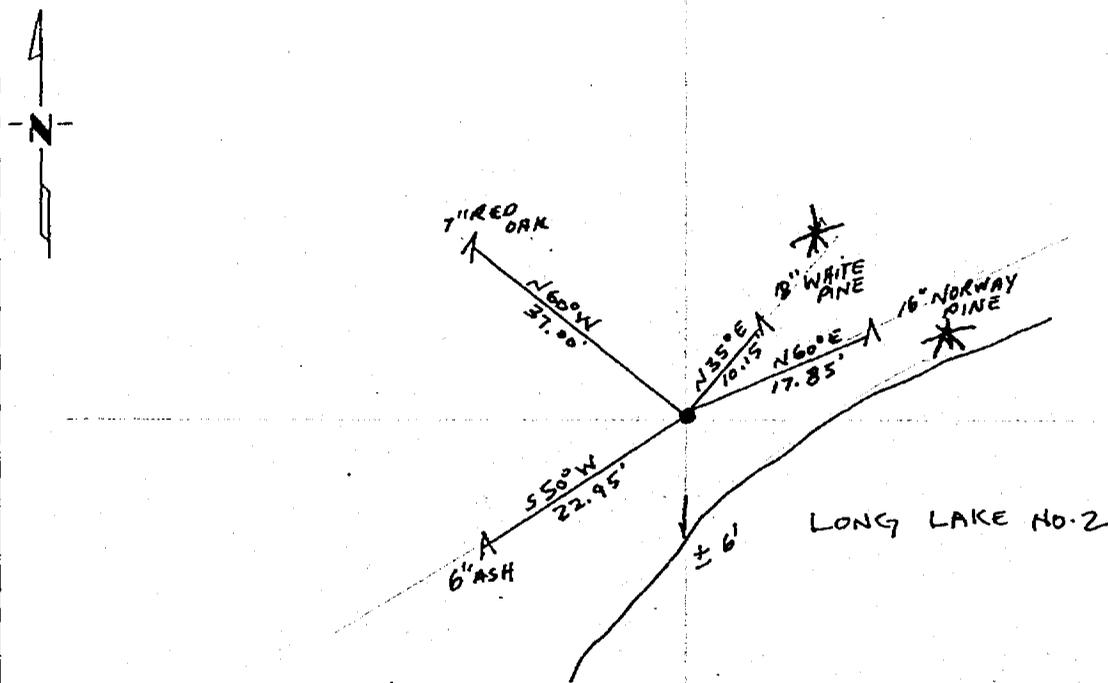

ALL TIE TREES
 MARKED WITH DOUBLE BLAZES
 MEASURED TO DISC IN SIDE

Statement of evidence relative to this corner location is on back of page. 276693

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Murray S. Stender 7/30/84
SIGNATURE DATE

Registration No. 7452

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:30 A.M. on the 31 day of July A.D., 19 84

County Recorder Claudine Kayler

By MS, Deputy

DOCUMENT NO. 276693

Statement of Evidence:

Original Government Survey

Corner set in 1865 by Wright & Walker

On 7/14/81 iron was located and used in section subdivision of Section 4, Township 139, Range 29, Myron Landecker, Registered Surveyor #7452.

Several metes and bounds descriptions lie to East.

In 1934 John Curo set a 2" x 30" I.P. from original BT stump. Book 226, Page 117, 121, 125.

Myron Landecker believes this to be a perpetuation of the original corner as reset by John Curo finding two of his (Curo's) BT's.