

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northwest Corner of Section 17, Township 144 N., Range 25 W., 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 11-15-1984 placed a 2 1/2" by 5 feet long Galvanized Iron Pipe with 3" Brass Cap
DATE
stamped as shown, up 1.50 feet.

5° East Declination

SKETCH OF REFERENCE TIES
NOT TO SCALE

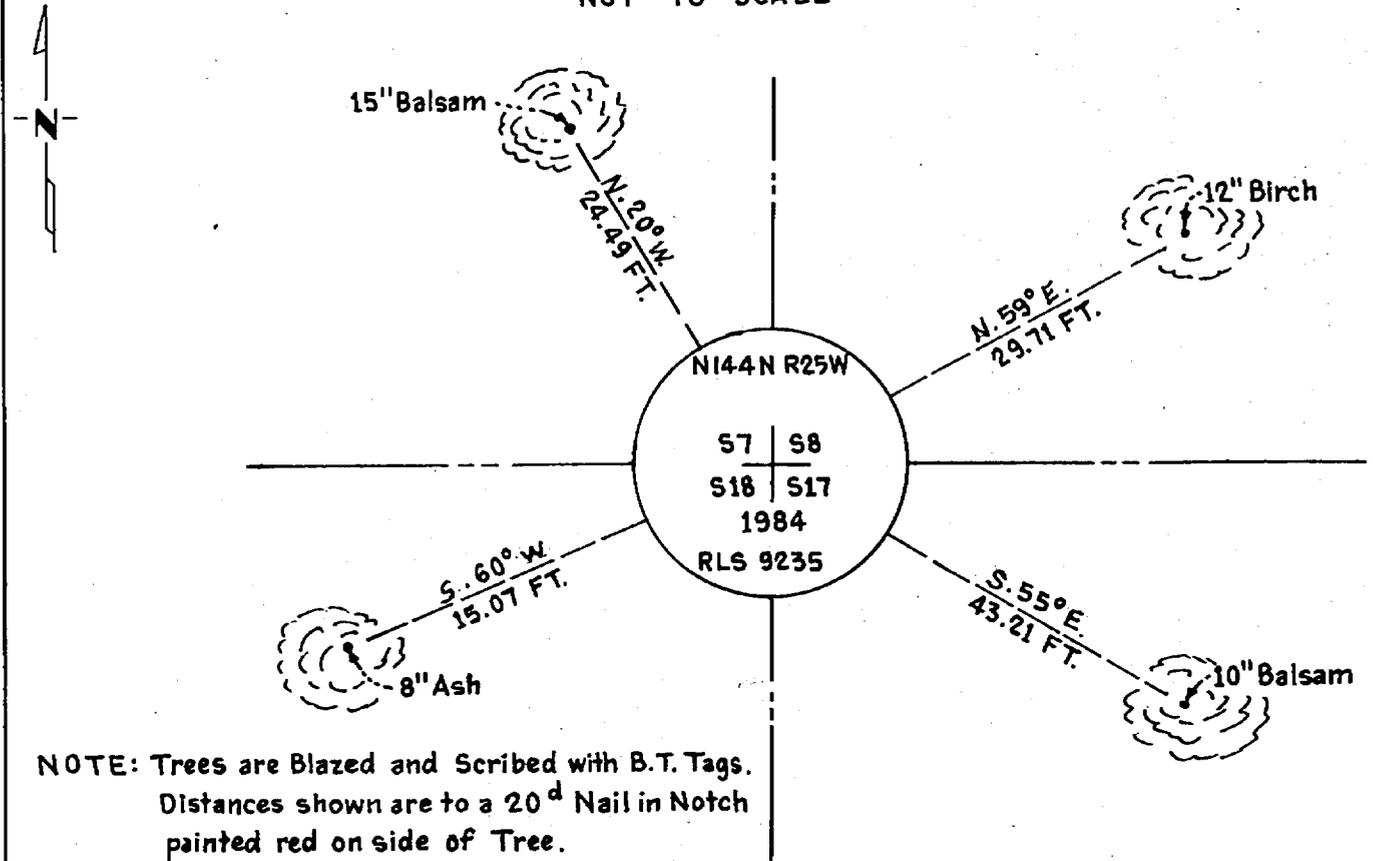

NOTE: Trees are Blazed and Scribed with B.T. Tags.
 Distances shown are to a 20^d Nail in Notch
 painted red on side of Tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Parker 3/29/85
SIGNATURE DATE

Registration No. 9235
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

281681
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:24 P.M. on the 2 day of May A.D., 19 85

County Recorder Claudia Kayler
 By MS, Deputy
 DOCUMENT NO. 281681

Statement of Evidence:

J5

This corner was originally established in April, 1876, by B.C. Baldwin, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Baldwin's notes state that a post was set to mark the corner and referenced by the following:

- A 5" Cedar that bears N55°E a distance of 10 links [6.60 feet]
- A 6" Elm that bears S53°E a distance of 25 links [16.50 feet]
- A 6" Ash that bears S39°W a distance of 7 links [4.62 feet]
- A 5" Cedar that bears N44°W a distance of 10 links [6.60 feet]

On June 27, 1984, personnel from Advance Surveying & Engineering Co. made a thorough search for this corner and the above mentioned references but to no avail.

On November 15, 1984, an additional search was made by Advance prior to reestablishing this corner by Double proportionate methods between the North Quarter corner of Section 16 and the Northwest corner of Section 18 and between the Southeast corner of Section 30 and the Southeast corner of Section 6.