

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East 1/4 Corner of Section 18, Township 144N, Range 25W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 12-14-1984 placed a 2 1/2" (O.D.) by 5 feet long galvanized iron
DATE pipe with 3" brass cap Up 1.4 feet

5° East declination SKETCH OF REFERENCE TIES
Not to Scale

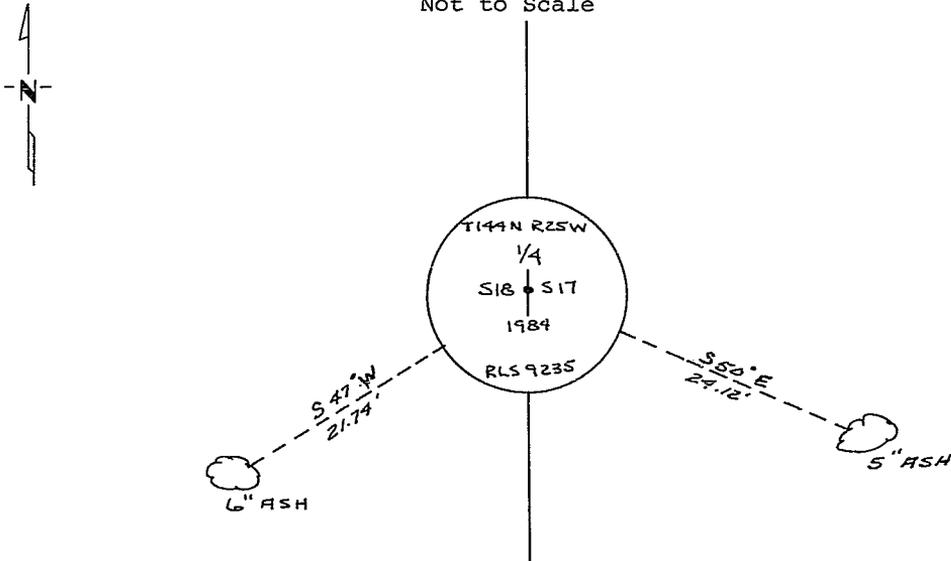

Note:
Trees are blazed and scribed with B.T. tags. Distances shown are to a 20^d nail in notch painted red on side of tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Parker SIGNATURE 3/29/85 DATE

- Registration No. 9235
- Land Surveyor, Professional Engineer
 - County Surveyor, County Engineer

281715
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:55 P.M. on the 3 day of May A.D., 1985

County Recorder Claudia Keyler
By MS, Deputy

DOCUMENT NO. 281715

Statement of Evidence:

L5

This corner was originally established in April, 1876, by B.C. Baldwin, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Baldwin's notes state that a post was set to mark the corner and referenced by the following:

A 8" Ash that bears S25°W a distance of 14 links [9.24 feet]
A 6" Ash that bears S6°E a distance of 24 links [15.84 feet]

On June 19, 1936, Mr. Hanson, Party Chief, with the U.S.F.S. indicates he found a wood stake badly burned and believes it to be G.L.O. corner. He also states that no Bearing Trees found. He places a metal location tag on a 3" Ash that states corner bears N66°E a distance of 9 links [5.94 feet]

On January 3, 1958, W.E. Herron, Asst. Dist. Ranger, states that corner consists of a metal tag in place. He does not believe this to be G.L.O. corner. He also states that he places a metal location tag on a 4" Ash that already has a tag on it. He shows a ? symbol for bearing and distance to corner.

On June 26, 1984, personnel from Advance Surveying & Engineering Co. made a thorough search for this corner and the above mentioned references but to no avail. However we do find an 8" Ash with 2 location tags attached. The tags are badly rusted and we are not able to read information on them.

On December 14, 1984, an additional search was made by Advance prior to reestablishing this corner at its "lost" position half way and on line between adjacent section corners and as shown on the sketch. This position is approximately N32°W a distance of 19 feet from the tree with location tags on it.