

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 22, Township 144N., Range 25W., 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 12-11-1984 placed a 5/8" by 8 feet long Aluminum Rod with 3" Aluminum Cap
DATE
stamped as shown, up 0.40 feet.

5° EAST Declination

SKETCH OF REFERENCE TIES
NOT TO SCALE

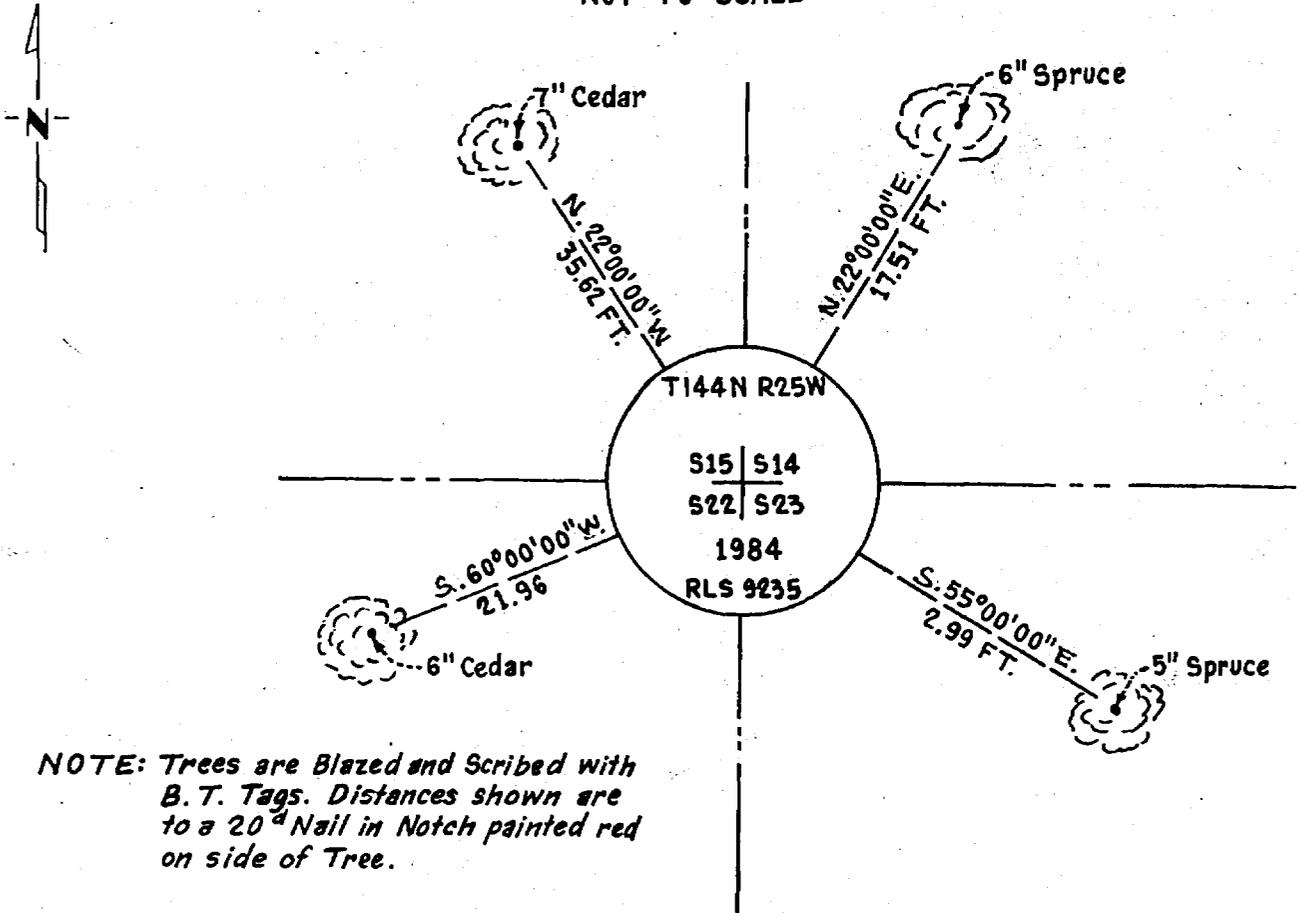

NOTE: Trees are Blazed and Scribed with B.T. Tags. Distances shown are to a 20^d Nail in Notch painted red on side of Tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Parker 3/29/85
SIGNATURE DATE

Registration No. 9235

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

281809
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:10 P.M. on the 8 day of May A.D., 1985

County Recorder Claudia Kayler
By MS, Deputy

DOCUMENT NO. 281809

Statement of Evidence:

N17

This corner was originally established in April, 1876, by B.C. Baldwin, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Baldwin's notes state that a post was set to mark the corner and referenced by the following:

- A 5" Tamarack that bears N50°E a distance of 21 links [13.86 feet]
- A 5" Spruce that bears S14°E a distance of 9 links [5.94 feet]
- A 5" Spruce that bears S42°W a distance of 8 links [5.28 feet]
- A 8" Tamarack that bears N55°W a distance of 33 links [21.78 feet]

On July 6, 1984, personnel from Advance Surveying & Engineering Co. made a thorough search for this corner and the above mentioned references but to no avail:

On December 11, 1984, an additional search was made by Advance prior to reestablishing this corner by Double proportionate methods between the East Quarter corner of Section 15 and the Southeast corner of Section 22 and between the Northwest corner of Section 22 and the North Quarter corner of Section 23.