

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 27, Township 144N, Range 25W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 12-7-84 placed a 2 1/2" (O.D.) by 5 feet long galvanized iron pipe with 3" brass cap stamped as shown, up 1.50 feet.
DATE

5° East declination

SKETCH OF REFERENCE TIES
Not to Scale

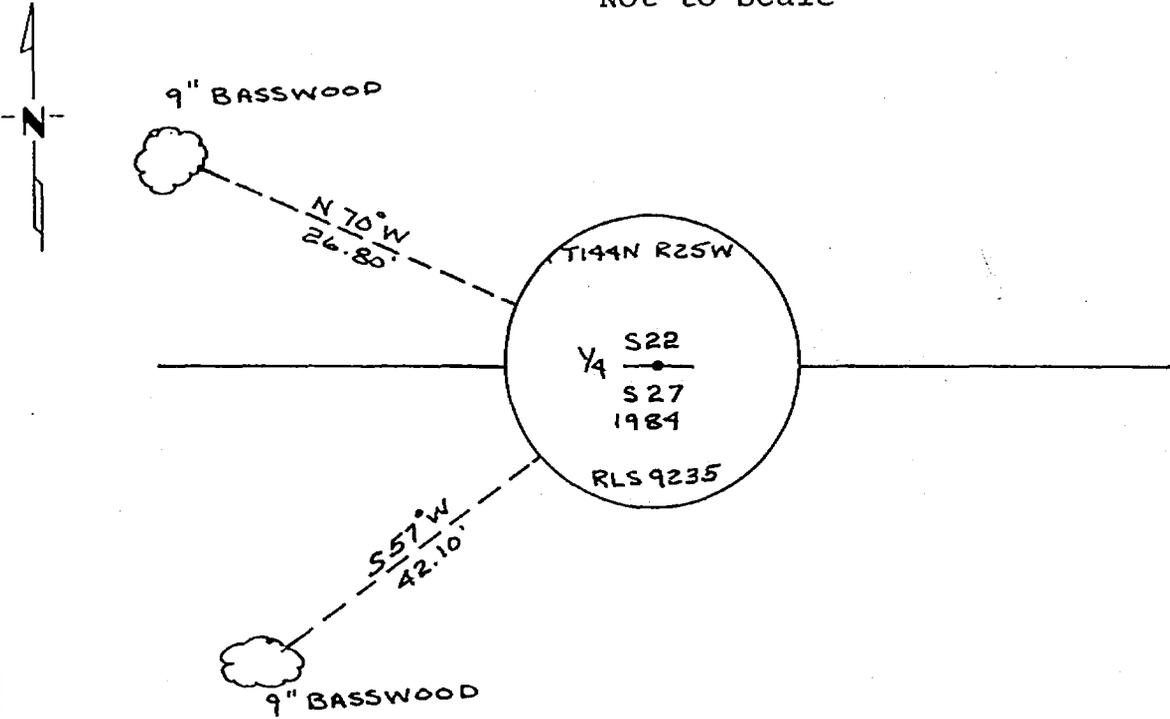

NOTE :
Trees are blazed and scribed with B.T. tags
Distances shown are to a 20^d nail in notch
painted red on side of tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Jaska 4/24/85
SIGNATURE DATE

Registration No. 9235

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

281 961
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:20 A.M. on the 15 day of May A.D., 19 85

County Recorder Claudia Kayler

By MS, Deputy

DOCUMENT NO. 281 961

Statement of Evidence:

R15

This corner was originally established in April, 1876, by B.C. Baldwin, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Baldwin's notes state that a post was set to mark the corner and referenced by the following:

A 4" Willow that bears N52°W a distance of 140 links [92.40 feet]
A 6" Balsam that bears N80°E a distance of 6 links [3.96 feet]

On June 29, 1984, personnel from Advance Surveying & Engineering Co. made a thorough search for this corner and the above mentioned references but to no avail.

On October 24, 1984, an additional search was made by Advance prior to reestablishing this corner at its "lost" position half way and on line between adjacent section corners and as shown on the sketch.