

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 26, Township 144 N., Range 25 W., 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 12-10-1984 placed a 2 1/2" (O.D.) by 5 feet long Galvanized Iron Pipe with 3" Brass Cap stamped as shown, up 1.50 feet.
DATE

5° EAST Declination

SKETCH OF REFERENCE TIES
NOT TO SCALE

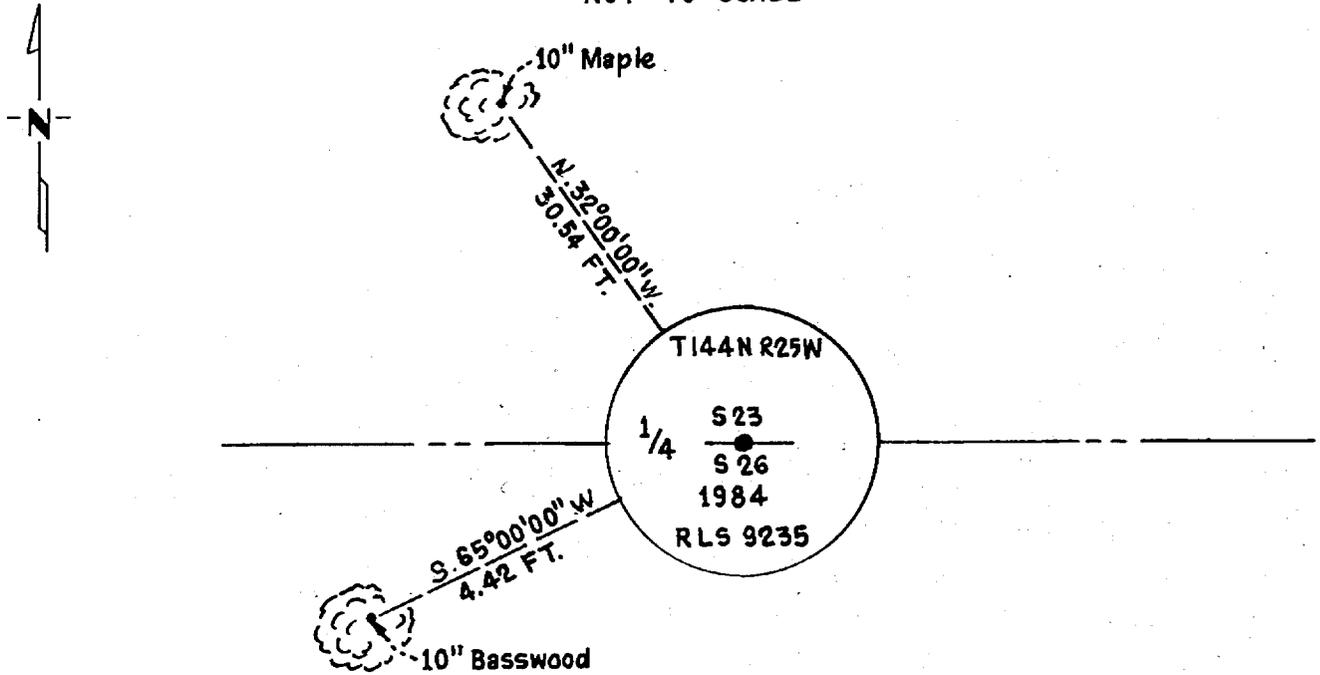

NOTE: Trees are Blazed and Scribed with B.T. Tags. Distances shown are to a 20^d Nail in Notch painted red on side of Tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Parker 3/29/85
SIGNATURE DATE

Registration No. 9235
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

281963
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:30 A.M. on the 15 day of May A.D., 1985

County Recorder Claudia Kayler
 By MS, Deputy

DOCUMENT NO. 281963

Statement of Evidence:

R19

This corner was originally established in April, 1876, by B.C. Baldwin, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Baldwin's notes state that a post was set to mark the corner and referenced by the following:

A 24" White pine that bears N55°W a distance of [6 links 3.96 feet]
A 8" Birch that bears S7°W a distance of 20 links [13.20 feet]

In 1900, A Map of survey by the Corps of Engineers shows that they found the corner.

On June 29, 1984, personnel from Advance Surveying & Engineering Co. made a thorough search for this corner and the above mentioned references but to no avail. There are numerous Pine stumps in this area. This search area is approximately 100 feet East of the Southeast corner of a Spruce plantation.

On December 10, 1984, an additional search was made by Advance prior to reestablishing this corner by Obliterated methods by using coordinate position determined from Corps of Engineers Survey done in 1900.