

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East quarter Corner of Section 22, Township 138, Range 30, 5th P.M.


STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 6/17/85 found a 2 1/2" galvanized pipe with cap in edge of low wet area
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

NO SCALE

SKETCH OF REFERENCE TIES

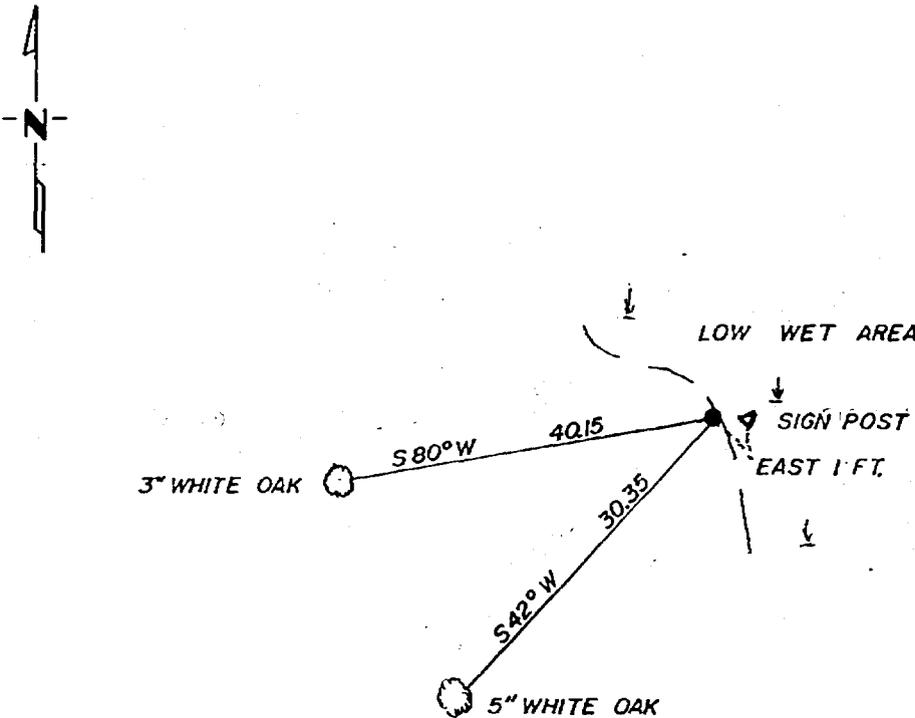

ALL MEASUREMENTS TO NAIL IN SIDE OF TREE.

Statement of evidence relative to this corner location is on back of page. 286 250

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Bess 7-22-85
SIGNATURE DATE

Registration No. 11395
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 4:20 A.M. on the 9 day of Dec. A.D., 1985

Register of Deeds Cherline Keyser
 By MS, Deputy

DOCUMENT NO. 286 250

Statement of Evidence: East quarter corner of Section 22, T.138N., R.30W

- 1865 Original survey set a wood post with the following
BT's marked: Jackpine 9" S 80 W 64 lks.
- 1907 County record book B, page 345-349 shows that
John Curo, RLS found the stump of the BT and set a
6' long wood post.
- 1913 County record book B, page 289-300 shows that
John Curo RLS, set a 2"x48" galvanized iron pipe in
concrete in place of the wood post he set in 1907.
No BTS were marked.
- 1985 Walter Curo found the 2"x48" galvanized pipe and
marked BT's as shown on front.