

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

For the **South Quarter Corner** of Section 7, Township 143 North, Range 26 West of the 5th Principal Meridian, STATE OF MINNESOTA, County of Cass.


On May 19, 1986, to mark this corner position, we set a 2.5 inch (outside diameter) by 60 inch long galvanized iron pipe, with a polystyrene base containing an embedded magnetized pellet, and topped with a 3 inch diameter brass tablet, up 18 inches and stamped as shown in the sketch.

SKETCH OF REFERENCE TIES

Top of Page is NORTH

(not to scale)

decl: 5° E

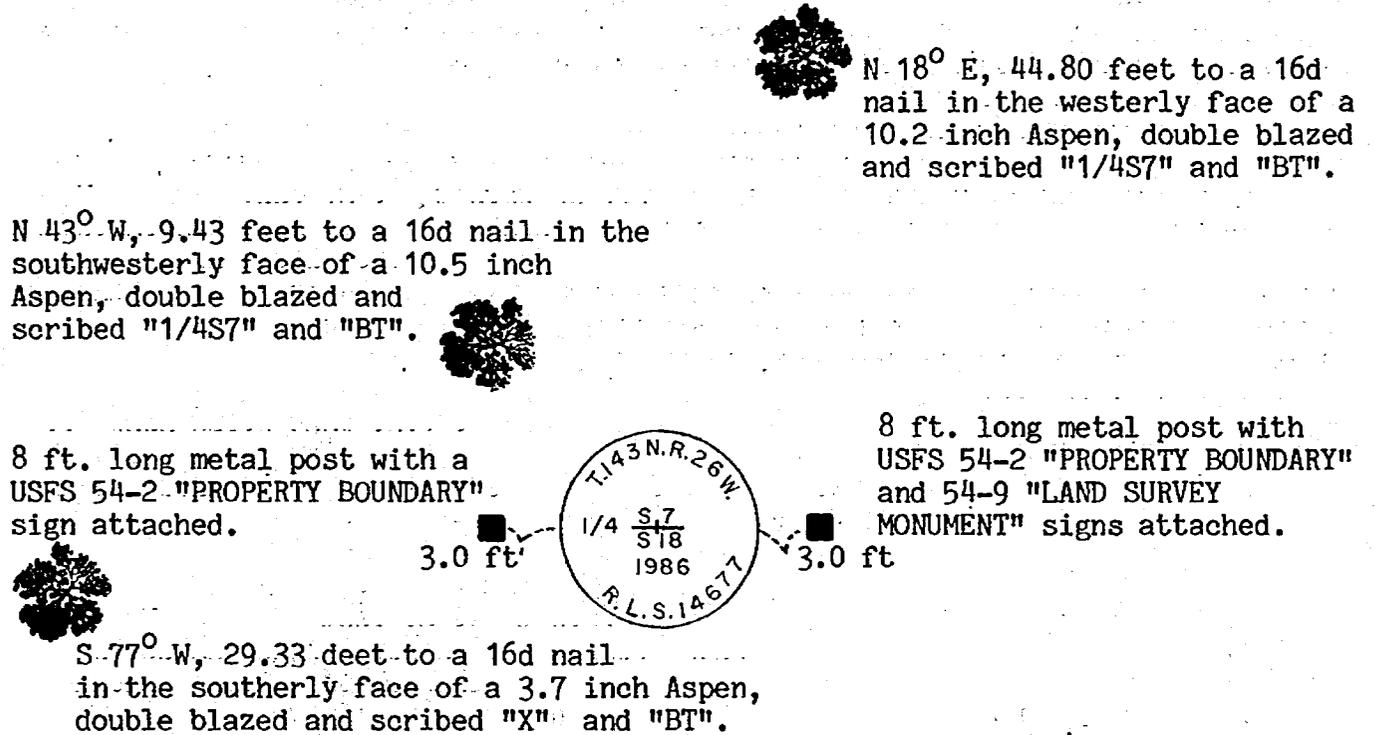

All bearing trees are marked with red enamel, a USFS 54-3 "BEARING TREE TAG", and a 60d spike driven vertically into the base of the baseblaze.

Statement of evidence relative to this corner position is on the back.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Kenneth L. Whitehorn
Kenneth L. Whitehorn

Date JUN. 17 1986 Registration No. 14677

289668
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the office of the County Recorder this 24 day of June, 19 86, at 9:05 A.M. and assigned DOCUMENT NUMBER 289668.

Claudine Kaylor
Claudine Kaylor, County Recorder

STATEMENT OF EVIDENCE: For the **South Quarter Corner** of Section 7, Township 143 North, Range 26 West of the 5th Principal Meridian,

This corner position was originally established on August 30, 1872, by Eli W. Griffin, Deputy Surveyor, under contract to the General Land Office, now the Bureau of Land Management (BLM). The record of this survey is on file in the Office of the Secretary of State, St. Paul, Minnesota, and indicates a wood post to mark the corner position. This post was witnessed by: a 5 inch diameter Fir that bears NORTH-20 degrees WEST, a distance of 5 links (3.30 feet); and a 4 inch diameter Birch that bears SOUTH 15 degrees EAST, a distance of 40 links (26.40 feet).

On file in the Office of the Corps of Engineers, St. Paul, Minnesota, is the record of a control survey for the Pokegama Reservoir. This record on page 18 of Book 233 and indicates that a stake was set, with some question that an iron was possibly set) from the recovered Balsam, in good condition, in the northwest quadrant; and the birch, rotted and fallen, in the southeast quadrant.

On file with the Department of Natural Resources, Bureau of Engineering, St. Paul, Minnesota is the record of an April 1975 search for this corner position. This record, in file G-321-MUD-GOOSE WILDLIFE MANAGEMENT AREA, indicates that nothing was found to perpetuate this corner position.

After several searches of the area in 1985 and 1986 we were unable to recover any evidence of this corner position so we established the monument and references, as shown on the front of this document, in the lost position.