


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 19, Township 145 N., Range 28 W., 5th P.M.  
STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 8-14-86 found a 2" x 60" iron pipe with cap in place  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

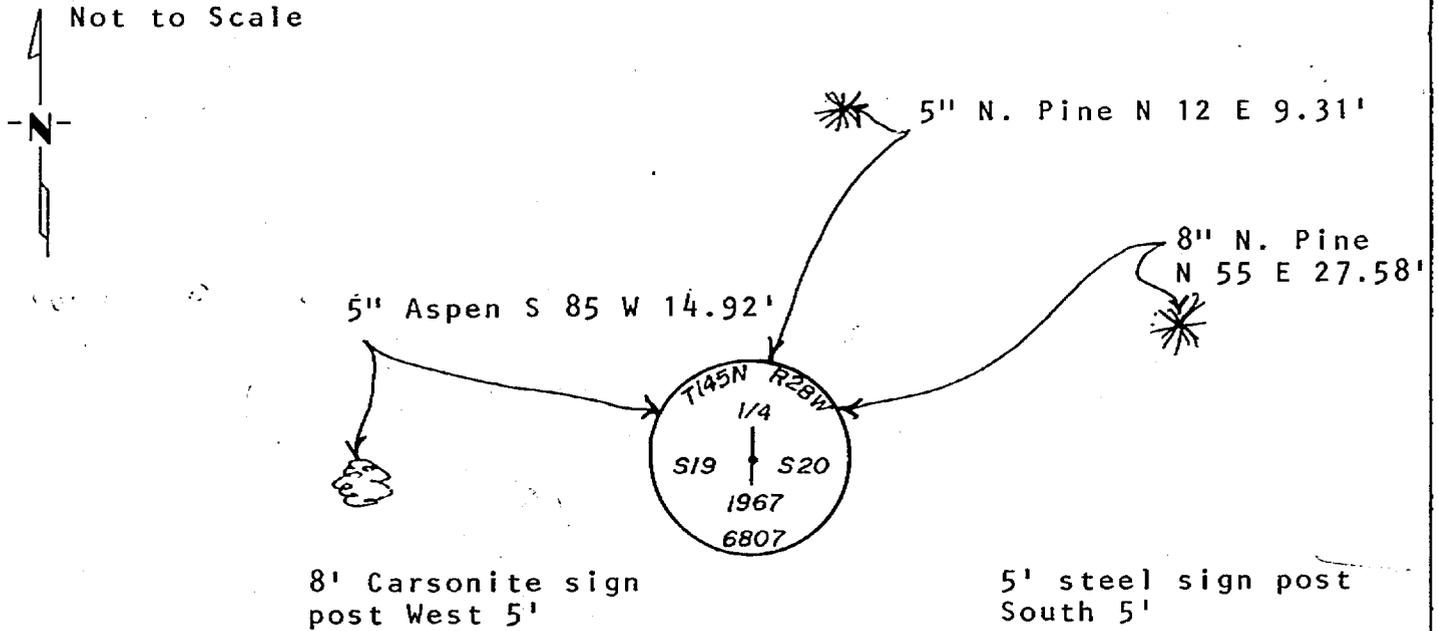

All measurements are to spks. in side of tree, trees are double blazed, scribed and painted red, with USFS 54-3 bearing tree tags attached.

Statement of evidence relative to this corner location is on back of page. 291634

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Cass 9-12-86  
SIGNATURE DATE

Registration No. 11395

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

#### OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:00 A.M. on the 15 day of Sept. A.D., 19 86

County Recorder Claudine Kaylor  
By MS, Deputy

DOCUMENT NO. 291634

Statement of Evidence: East Quarter Corner Section 19, T. 145 N., R. 28 W.,  
5th P.M.

- 1873 U.S. General Land Office survey set a wood post and marked the following bearing trees: 10" J. Pine S 71½ W 19 lks., 10" J. Pine N 13 E 204 lks.
- 1937 J.A. Guelhaug found an oak post and scribed two Aspen trees.
- 1967 USFS found 1937 evidence and set a 2" x 60" iron pipe with cap and marked new bearings: 5" Oak East 132.1', 5" Oak N 15 W 102.85', 8" Aspen S 26 W 40.2'.
- 1979 MN Dept. of Natural Resources survey crew found iron pipe with cap and 1937 blazed Aspen S 36 W 16.5'.
- 1986 On August 14, Walter E. Curo found the 2" x 60" iron pipe in place, he marked new bearings: 5" Aspen S 85 W 14.92', 5" Norway Pine N 12 E 9.31', 8" Norway Pine N 55 E 27.58', 5' steel sign post South 5', 8' carsonite sign post West 5'.