

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 10, Township 135 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9/30/86 placed a 2"x 18" telespar monument with stamped aluminum cap
down 10'^{DATE} in centerline of E-W rd in line with old fence south

SKETCH OF REFERENCE TIES

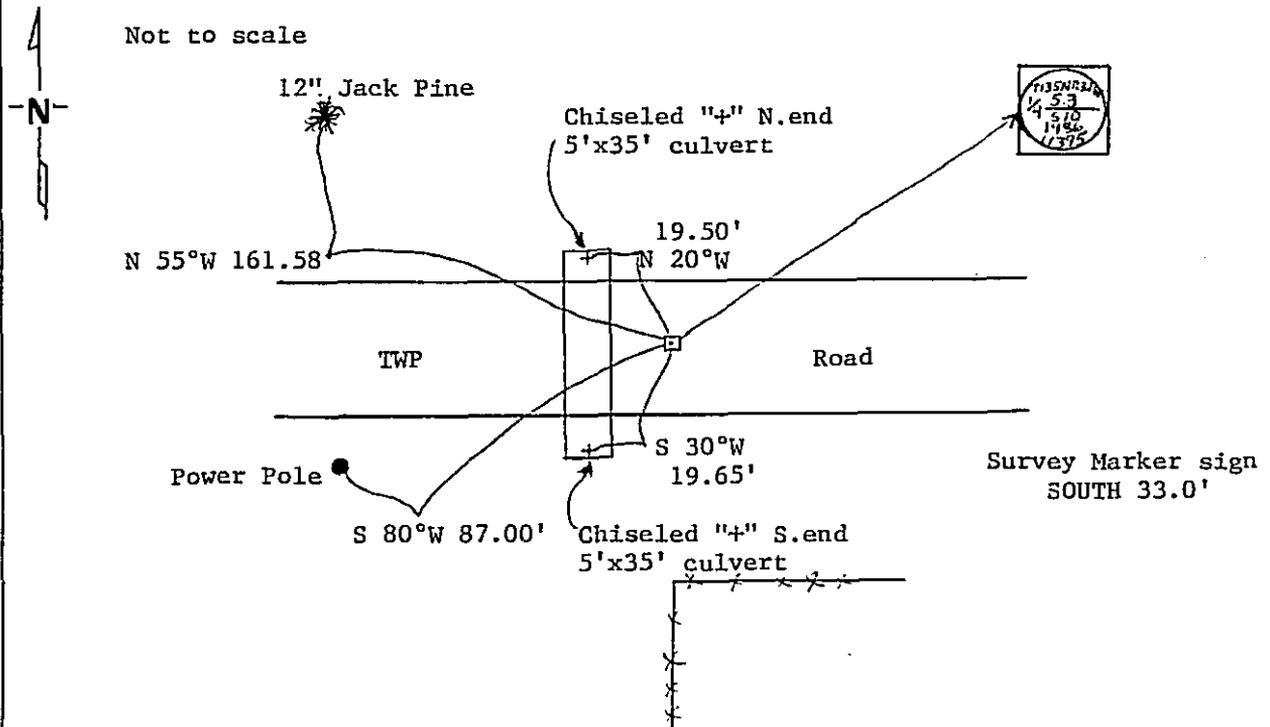

Measurements are to nail in side of object (or to "+")
Bearings are assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page.

297169

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Olson 1-22-87
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 9:50 A.M. on the 1 day of June A.D., 19 87

Register of Deeds Claudine Kayler

By MS, Deputy

DOCUMENT NO. 297169

STATEMENT OF EVIDENCE North Quarter Corner Section 10, T.135 N., R. 32W., 5th P.M.

- 1866 U.S. General Land Office survey set a wood post for this corner but there were no trees near for bearings.
- 1985 On Sept. 17, while digging for other corners in the area, Ken Meyer, backhoe operator, told Terry Freeman, Cass County Survey Technician that area $\pm 50'$ on each side of corner washed out in spring of 1985.
- 1986 On Sept. 30, Terry Freeman, Jim Cripps and Norman Maunu set a 2"x 18" telespar monument with stamped aluminum cap in centerline of E-W road in line with old fence south.

After checking distances E-W, the Cass County Surveyors Office and Comstock & Davis agree that the old fence south and centerline of E-W road was the best available evidence of the corner.