

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


WITNESS CORNER TO  
THE NORTHEAST Corner of Section 29, Township 140 N, Range 26 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 12-01-81 found THE REMAINS OF A GLO BEARING TREE  
DATE
- left monument as found, 
  lowered monument, 
  removed monument (explain)
- On 12-01-81 placed a 1 1/2" x 22" IRON PIPE, UP 0.2'  
DATE

### SKETCH OF REFERENCE TIES

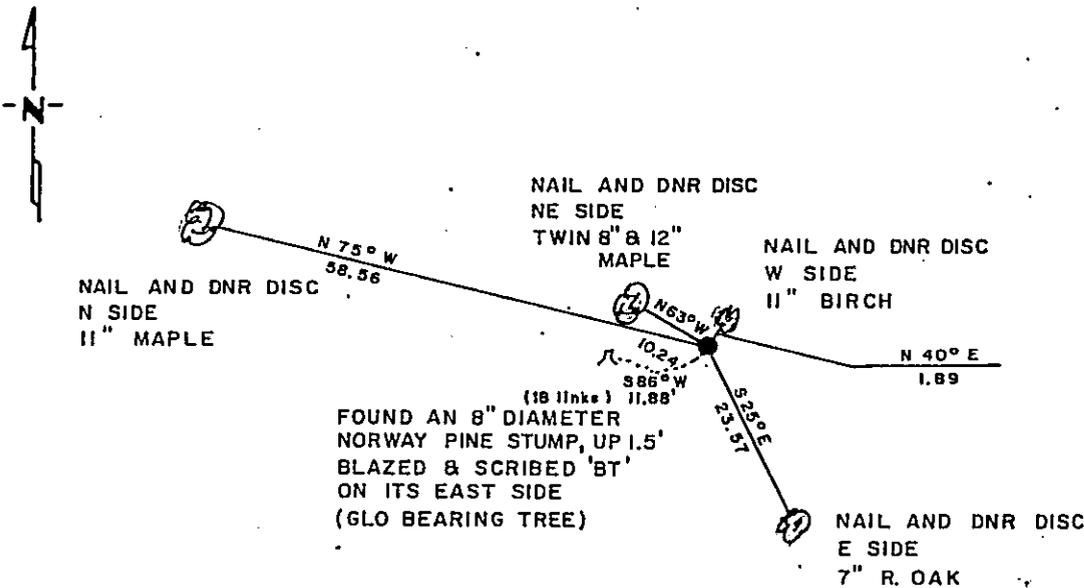

BEARINGS OBSERVED WITH COMPASS

Statement of evidence relative to this corner location is on back of page.

JAW 10-23-85  
A-414

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Bert R. Euclid 11-25-86  
SIGNATURE DATE

Registration No. 10516

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

297689

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:40 A.M. on the 22 day of June A.D., 1987

County Recorder Clondine Kayler  
 By MS, Deputy

DOCUMENT NO. 297689

Witness Corner to Northeast Corner Section 29, Township 140 North, Range 26 West

This corner was originally established by the U.S. General Land Office survey in 1871. The government notes show the section corner is in a pond with a witness corner set 1.00 chain South and marked with a wood post with the following bearing trees marked:

10" Norway Pine, S. 16° E., 24 links (15.84 feet)

8" Norway Pine, S. 86° W., 18 links (11.88 feet)

In November 1981, the DNR Bureau of Engineering contacted the following for corner information:

Cass County Offices of the Recorder and Surveyor

Gary H. Stevenson and Associates, Inc. of Walker

Wallace F. Buckler of Crosby

Landecker and Associates, Inc. of Pequot Lakes

Washburn Lake DNR Forestry Office

No resurvey information was obtained on this corner.

In December 1981, the DNR Bureau of Engineering traversed to the area of the witness corner and found an 8" diameter Norway Pine stump up 1.5 feet, blazed and scribed "BT" on its east side. Searched for but found no other evidence of the corner. A 1-1/2" by 22" iron pipe was set for corner N. 86° E., 11.88 feet from the center of the Norway Pine stump.

Accept the iron pipe as the location of the witness corner and did not establish the section corner.

Traverse information is available from the DNR Bureau of Engineering.

S125