

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast: \_\_\_\_\_ Corner of Section 20, Township 140N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 1-16-87 placed a 1 1/4" x 1 1/4" x 20" perforated steel tube with  
DATE  
an aluminum cap stamped "DNR SURVEY MARKER", up 0.1'

### SKETCH OF REFERENCE TIES

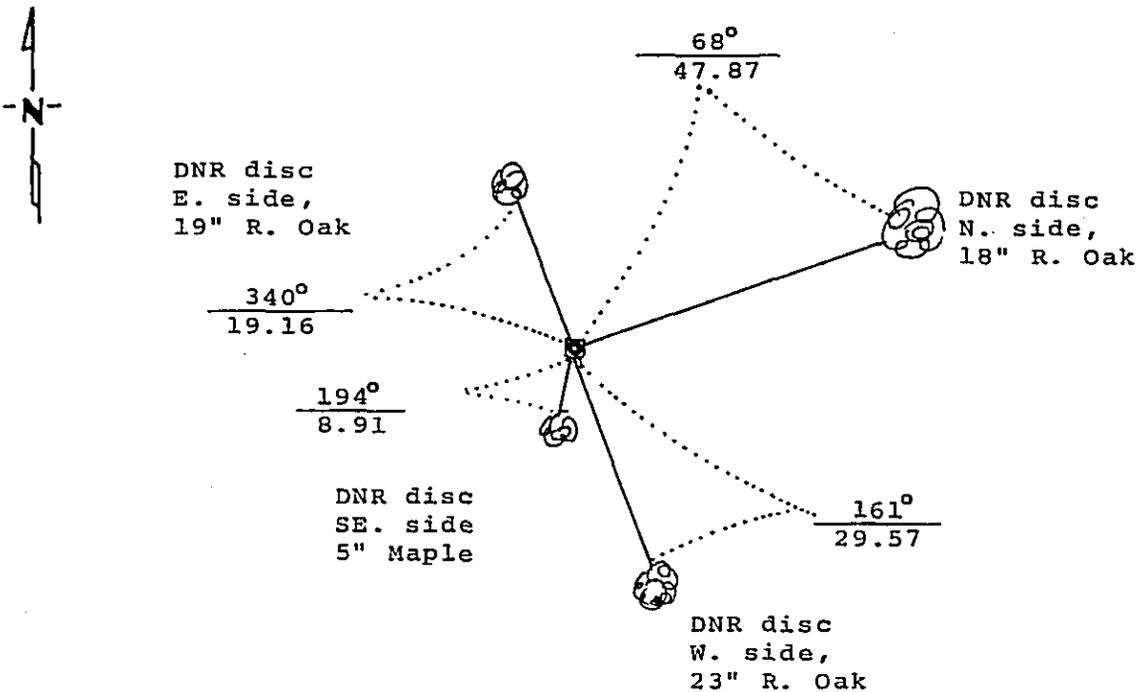

Azimuths observed with compass

Statement of evidence relative to this corner location is on back of page.

JAW 5-12-87  
A-414

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 5-29-87  
SIGNATURE DATE

Registration No. 16098

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

380477

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:45 P.M. on the 30 day of April A.D., 1987

County Recorder Abundine Kaylor

By MS, Deputy

DOCUMENT NO. 300477

Northeast Corner Section 20, Township 140 North, Range 26 West

This corner was originally established by the U.S. General Land Office survey in 1871. The government notes show corner marked with a wood post with the following bearing trees marked:

- 6" Aspen, N. 21° E., 19 links (12.54 feet)
- 10" Birch, N. 75° W., 33 links (21.78 feet)
- 6" Oak, S. 30° W., 21 links (13.86 feet)
- 6" Oak, S. 64° E., 19 links (12.54 feet)

In November 1981, the DNR Bureau of Engineering contacted the following for corner information:

Cass County Offices of the Recorder and Surveyor  
Gary H. Stevenson and Associates, Inc. of Walker  
Wallace F. Buckler of Crosby  
Landecker and Associates, Inc. of Pequot Lakes  
Washburn Lake DNR Forestry Office

The information was obtained from the Washburn Lake DNR Forestry office: Civilian Conservation Corps Field Book 20 on Page 46 and 48 dated February 1938, shows a 4" stake squared on four sides at the approximate corner. The corner is shown:

- 5285 feet from the northeast corner of Section 21
- 5283 feet 7 inches from the northeast corner of Section 19

Civilian Conservation Corps Field Book 3 on Page 73 dated July 1940, shows an iron pipe at corner but does not indicate if found or set.

The following information was obtained from Gary H. Stevenson and Associates, Inc.:

A section subdivision map of Section 16, date not indicated, shows a coordinate of an approximate corner that appears good for east-west control. The approximate corner is shown:

- 2655.74 feet from the east quarter corner of Section 17
- 5297.74 feet from the northeast corner of Section 21

An undated worksheet of a survey in Section 17 shows a 6-inch ironwood with yellow tag marked "approx. cor." was used for the east-west control only for section corner. The approximate corner is shown:

- 2655.74 feet from the east quarter corner of Section 17
- 5234.65 feet from the northwest corner of Section 20
- 2617.33 feet from the approximate north quarter corner of Section 20

In December 1981, the DNR Bureau of Engineering traversed to the area of the corner and searched for but found no evidence of a monument or the GLO bearing trees.

The lost position for corner was computed using the witness corner to the northeast corner of Section 29, the east quarter corner of Section 17, the northeast corner of Section 21, and the northeast corner of Section 19. This position was found to be:

- 5426.82 feet from the witness corner to the northeast corner of Section 29
- 2680.41 feet from the east quarter corner of Section 17
- 5266.09 feet from the northeast corner of Section 21
- 5220.13 feet from the northeast corner of Section 19

Accept the lost position as the location of the corner.