

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 25, Township 141 N, Range 28 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:


On 10-30-87 found a BRASS CAPPED MONUMENT
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

MAG. DECL: 4 1/2° E

SKETCH OF REFERENCE TIES

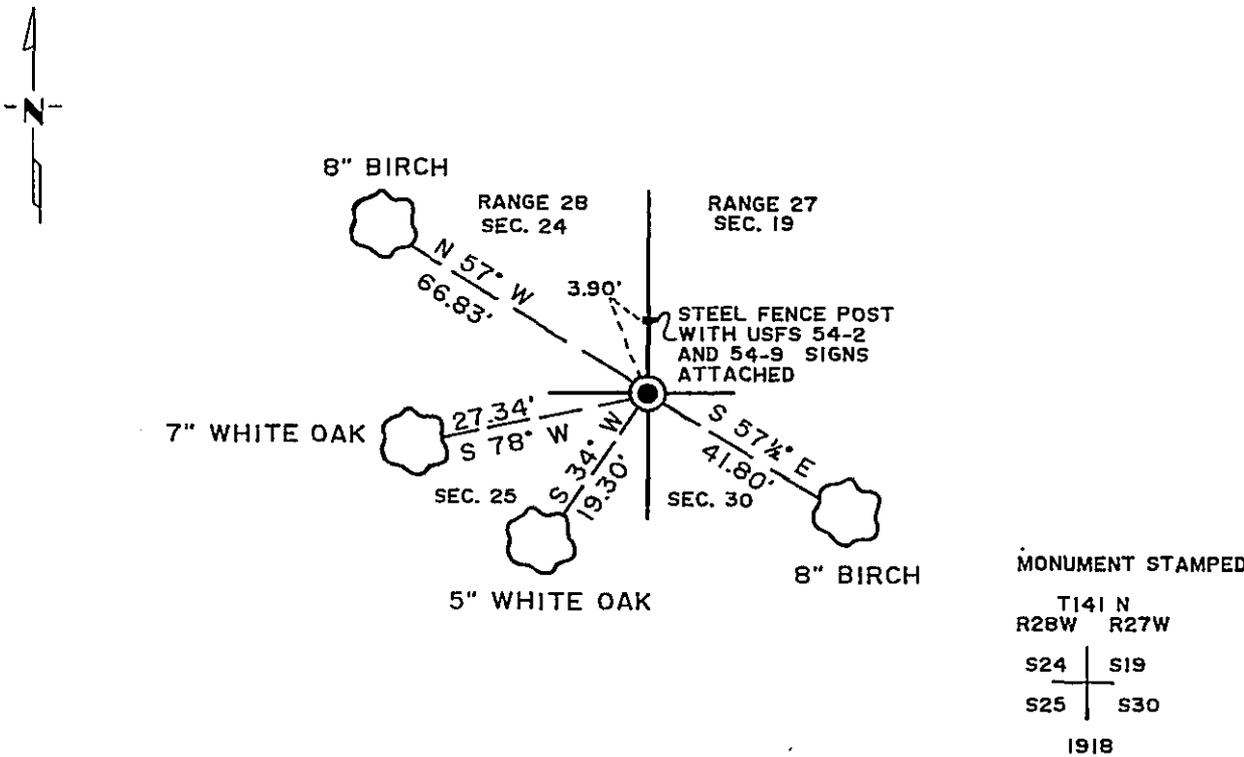

TIES SHOWN ARE TO 16d NAIL IN BASE OF TREE

Statement of evidence relative to this corner location is on back of page. 302194

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Roger M. Muel
 Date 1/04/88 Registration No. 11946

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorder's office at 3:10 P. M. on the 8 day of January A.D., 1988

County Recorder Clondine Keyler
 By MJ, Deputy
 DOCUMENT NO. 302194

Statement of Evidence: Northeast Corner of Section 25, Township 141 North, Range 28 West of the 5th Principal Meridian

- 1873 P. H. Conger, contract Surveyor, for General Land Office, Set a post for corner....
From which
White Pine 30 in dia bears S30^oW. 47 lks diat
Norway Pine 20 in dia bears S10^oE 46 lks dist.
- 1918 Earl G. Harrington, U.S. Cadastral Engineer, notes show:
Found a 2 in. iron pipe and Government BTs., Pine stub 25 ins diam., bears S 25^oW. 47 lks , and s pine 25 ins. diam., bears S 10^oE., 46 lks.

Set an iron monument, 3 ft. long, 2 in. diam., for the section corner, with brass cap mkd.... From which

A norway pine 14 ins. diam., bears N 3^oE 325 lks
A norway pine 12 ins. diam., bears S 60½^oE 164 lks.
A white oak 6 ins. diam., bears N 23^oW 473 lks.
- 1973 William H. Okerman, RLS 6807, filed for record a Certificate of Location of Government Corner, No. 924. Found the Section Corner which was evedinced by remains of the General Land Office survey of 1918,. No new monument set as G.L.O. monument is in good condition.

W. Oak 6 inch S82^oW 27.40 feet scribed S24 BT
W. Oak 12 inch S48^oW 55.40 feet scribed S25 BT
W. Oak 4 inch S20^oE 9.10 feet scribed S30 BT
Birch 6 inch N68^oE 9.70 feet scribed S19 BT
- 1987 Roger A. Mustonen, RLS 11946, under contract with USFS, found the G.L.O. monument and Okermans BTs. However, they have all been cut down except the one scribed S24 BT. Made new ties to a nail in the base of the trees shown, and accepts the undisturbed monument as a perpetuation of the Northeast Corner of Section 25.
- 1913 John Curo, County Surveyor, set 3"X3"X36" Spruce stake, see County Survey Record Book "A", P 564-567
- 1915 N.D. Gorman, Surveyor, found post and iron, also old Govt. BTs. See County Survey Record Book "B", P 570-573.
- 1922 James H. Flynn, Surveyor, found Govt. iron corner. See County Survey Record Book :D:, P 76.