


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 23, Township 135 N., Range 30 W., 5th P.M.
STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 9/22/87 found a 3" sq. concrete monument with 3" metal disc on top,
DATE
up 18"
 left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

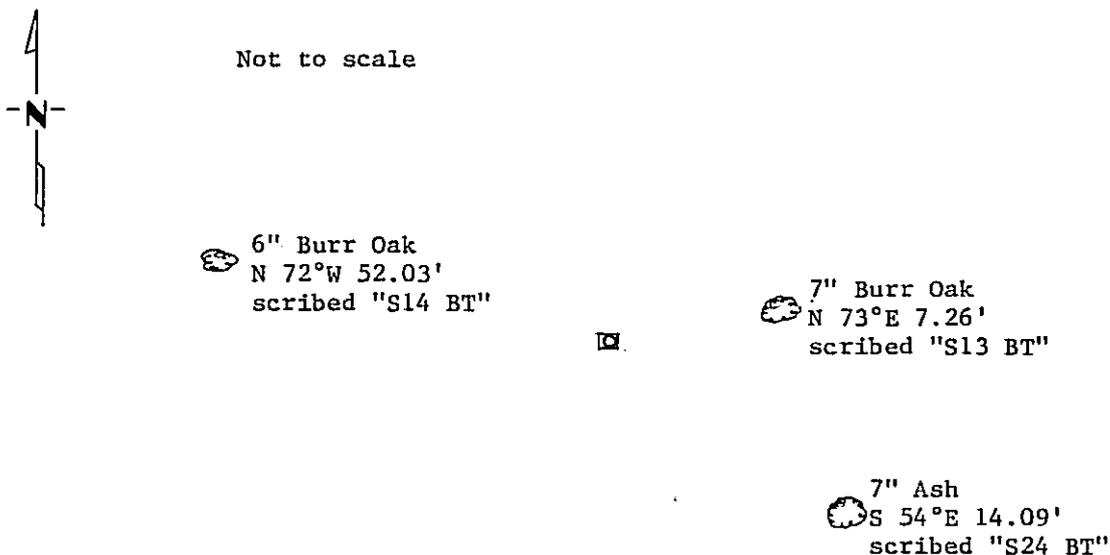

Trees double blazed, scribed, painted blaze orange and 54-3 Bearing Tree tag attached. Measurement taken to nail in side of tree.

Statement of evidence relative to this corner location is on back of page.

309678

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Cervo 1-3-89
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
 County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:20 P. .M. on the 3 day of January A.D., 1989

County Recorder Claudine Keyler

By MS, Deputy

DOCUMENT NO. 309678

Statement of Evidence: Northeast Corner Section 23, T.135 N., R.30 W., 5th P.M.

1869 US General Land Office survey set a wood post for this corner and marked the following bearing trees: 18" Aspen S 42°W 19 lks., 22" Aspen N 17°W 42 lks., 3" Aspen N 2°E 4 lks., 14" Aspen S 31°E 45 lks.

1987 On Sept. 22, Terry Freeman, County Survey Technician and Dan Marcum, County Forester, found a 3" sq. cement post with 3" steel disc on top, up 18". Marked new BT's as shown on front of this certificate.

Although there is no record of the corner being set, it probably was established when other corners in the area were done (East line of Sections 14, 23 & 26). Corner checks by rough chain to other corners in the area.