

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

WITNESS CORNER TO
NORTH QUARTER Corner of Section 18, Township 141N, Range 30W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 47° 02' 17.85155"
 Longitude: 94° 31' 26.82309"


On 6-22-88 found a 1" iron monument with brass cap
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

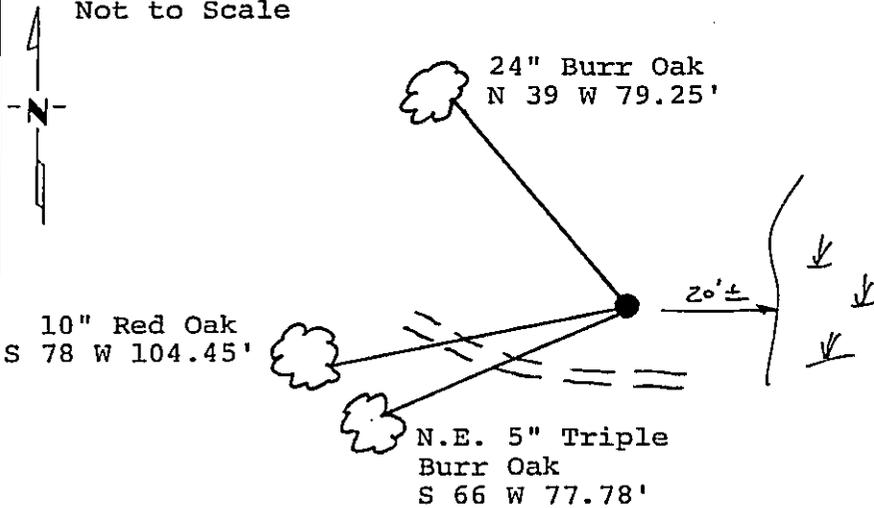

Monument Stamped

Monument is located
 25' north of Forest Service
 Trail #2659 & 20', more or
 less, to west edge of swamp.
 8' steel sign post N 75 W 5.0'
 Rock mound around base of
 monument.

All trees are
 painted with red
 enamel and marked
 with a 54-3
 (Bearing Tree) tag.

1/4 S 7 WC
S 18
 1917

Statement of evidence relative to this corner location is on back of page. 309832

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker 17008
 Date 12-15-88 Registration No. _____

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:35 A.M. on the 12 day of January A.D., 19 89
 County Recorder Claudine Kayler
 By ms, Deputy

DOCUMENT NO. 309832

Statement of Evidence: Witness to North Quarter Corner Section 18,
Township 141 North, Range 30 West, Cass County,
Minnesota

J-3 141-30
Bk.5 Pg.3

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 10 inch Spruce South 36 degrees West a distance of 23 links and a 10 inch Birch North 47 degrees West a distance of 35 links.

1917 U.S. General Land Office dependant resurvey reestablished this corner, a witness corner to the quarter corner 1.67 chains west of true position as determined by proportional measurement between the Northeast and Northwest Corners of Section 18. An iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: a 8 inch Red Oak North 81 degrees West a distance of 82 links; and a 14 inch Red Oak South 52 and 3/4 degrees West a distance of 86 links.

1979 U.S. Forest Service records show the following: brass cap monument found up 12 inches, no evidence of 1917 bearing trees. New bearing trees marked: a 10 inch Ash North 1 degree East a distance of 7.13 feet, a 9 inch Red Oak North 73 degrees West a distance of 46.85 feet, and a 22 inch White Oak North 39 degrees West a distance of 79.25 feet.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner. 1979 Ash and Red Oak bearing trees were cut off.

1988 on June 22 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: brass cap monument up 18 inches, 25 feet north of USFS Road 2659 and about 20 feet west, of west edge of swamp. Rock piled around monument. 1979 Burr Oak North 39 degrees West is now 24 inches. New bearings were marked and sign post set as shown on front of this certificate.